


alpha Value Line

PLANETARY GEARBOXES NP / NPL / NPS / NPT / NPR

The strength of the planetary gearboxes of the alpha Value Line lies in the combination of economy and variety of output variants. Additionally, the gearboxes are suitable for very diverse applications – thanks to the range of ratios and the optimal positioning accuracy.



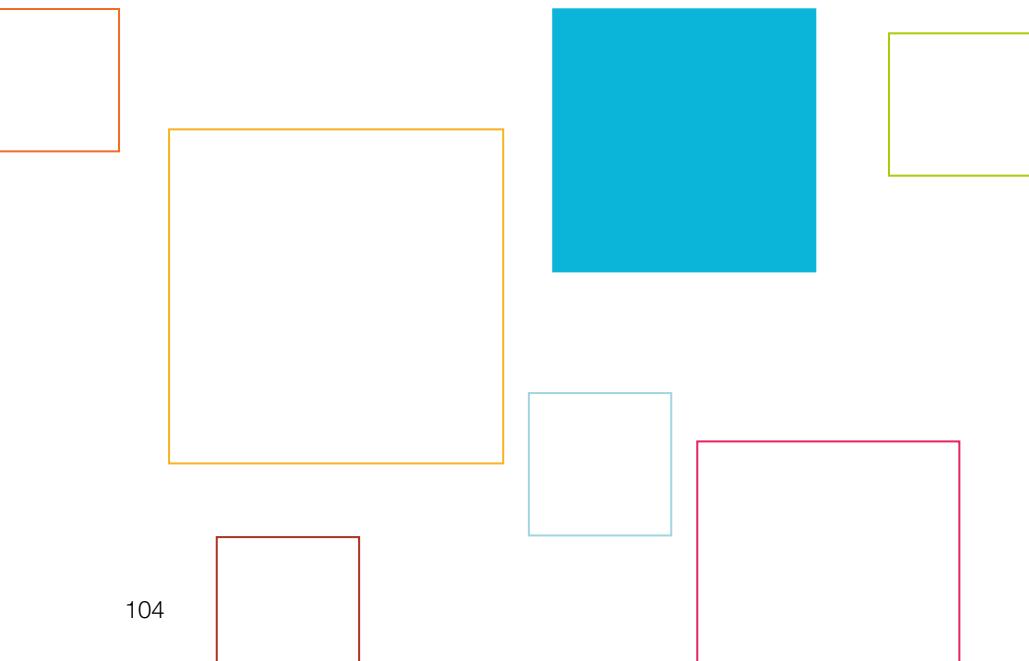

alpha Value Line in action

INDIVIDUAL TALENTS – for trend-setting research

The planetary gearboxes of the alpha Value Line are suitable for universal application and offer the best economical solution for almost every requirement – on each axis and for all industries.

But the NP servo gearbox is also used outside the typical industrial environment: For research purposes, the planetary gearboxes are used in installations for the simulation of tides or tsunamis as well as for coastline and port basin optimization. With the wave simulators, shipyards or research centers can simulate and investigate the behavior of ships at sea or in a port, in ordinary but also in extreme situations.

The low-backlash NP planetary gearboxes of the alpha Value Line drive axes optimally in installations of multi-servo axes in wave tanks worldwide – for example in Great Britain, the USA, China and Italy.

Each wave simulator has a certain number of paddles for generating very special wave types and frequencies. Depending on the size of the simulator and the type of wave to be simulated – deep and shallow water, sea, current and storm conditions or river mouths – a belt drive, ball screw or rack and pinion drive are used. The size of the individual paddles can vary from a few centimeters to several meters.

Technical support, quality and flexibility were the decisive factors for the decision to cooperate with WITTENSTEIN in the simulation system. The NP gearboxes of the alpha Value Line offer the customer the ideal mix of precision, dynamic performance and price.



Planetary Gearboxes
Value Line



NP / NPL / NPS / NPT / NPR

– Individual Talents



The planetary gearboxes of the NP series are universally applicable and offer the best economical solution for almost every requirement, in each axis in every sector. The various drives and output interfaces are offered as a compatible extension to the existing portfolio of WITTENSTEIN alpha – for maximum flexibility in design, assembly, and use.

PRODUCT HIGHLIGHTS



Unique modularity in this segment

With five series including five different output interfaces, the NP series offers maximum flexibility. From a simple machine connection using a B5 or B14 output flange to a flange connection or adjustment via slotted holes – the suitable solution for your machine requirements.



High economy

The gearboxes of the alpha Value Line are very economical to purchase, unbelievably efficient in operation, and maintenance free over their entire service life.



High flexibility

Modular configuration of the interfaces to the motor and to the application. The gearboxes are available with different clamping hub diameters, drive stages, design and mounting options.



Highest power density

The HIGH TORQUE version provides gearboxes with the highest power density.



Fast sizing

Efficient online sizing within seconds in the SIZING ASSISTANT on the basis of the application data or the motor.



NPS – planetary gearbox with SP⁺ output geometry



NPL – planetary gearbox with reinforced bearings and B14 output geometry



NPT – planetary gearbox with TP⁺ output geometry



More information about
the alpha Value Line:
simply scan the QR code
using your smartphone.

[https://alpha.wittenstein.de/
en-en/alpha-value-line/](https://alpha.wittenstein.de/en-en/alpha-value-line/)



Planetary Gearboxes
Value Line

A Two-piece clamping hub system of the high-end segment

- Labeled with the tightening torques for secure, fast motor mounting
- Guarantees best synchronization properties

B Various output shapes

- Five variants of the NP series available: including with B5 flange mounting, output flange, etc.
- Higher external forces possible with NPL, NPS, and NPR

C High ratio variation

- Large number of ratios ($i=3$ to $i=100$)
- Available in the common binary ratios

D Differentiated power density

- The HIGH TORQUE version permits an even higher torque density for sizes 015 – 035



SIZING ASSISTANT
YOUR GEARBOX WITHIN SECONDS

Efficient gearbox sizing within seconds – online without login
www.sizing-assistant.com

NPR – planetary gearbox with slot holes for optimal rack and pinion mounting

NP 005 MF 1-stage

			1-stage					
Ratio	i		4	5	7	8	10	
Max. torque ^{a) b) e)}	T_{2a}	Nm	18	22	22	21	21	
		in.lb	159	195	195	186	186	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	11	14	14	13	13	
		in.lb	97	124	124	115	115	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	26	26	26	26	26	
		in.lb	230	230	230	230	230	
Permitted average input speed ^{d)} (at T_{2v} and 20 °C ambient temperature)	n_{IN}	rpm	3800	4000	4300	4400	4600	
Max. input speed	n_{IMax}	rpm	10000	10000	10000	10000	10000	
Mean no load running torque ^{b)} (at $n_i=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.1	0.09	0.08	0.08	0.08	
		in.lb	0.89	0.8	0.71	0.71	0.71	
Max. backlash	j_t	arcmin			≤ 10			
Torsional rigidity ^{b)}	C_{i21}	Nm/arcmin	1.2	1.2	1.2	0.85	0.85	
		in.lb/arcmin	11	11	11	7.5	7.5	
Max. axial force ^{c)}	F_{2AMax}	N		700				
		lb _f		158				
Max. lateral force ^{c)}	F_{2QMax}	N		800				
		lb _f		180				
Max. tilting moment	M_{2KMax}	Nm		23				
		in.lb		204				
Efficiency at full load	η	%		97				
Service life	L_h	h		> 20000				
Weight (incl. standard adapter plate)	m	kg		0.7				
		lb _m		1.5				
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)		≤ 58				
Max. permitted housing temperature		°C		+90				
		°F		+194				
Ambient temperature		°C		-15 to +40				
		°F		+5 to +104				
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0005BA012.000-X					
		mm	X = 004.000 - 012.700					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z	8	J_1	kgcm ²	0.03	0.03	0.02	0.02
				10 ⁻³ in.lb.s ²	0.03	0.03	0.02	0.02
	A	9	J_1	kgcm ²	0.03	0.03	0.03	0.02
				10 ⁻³ in.lb.s ²	0.03	0.03	0.03	0.02
	B	11	J_1	kgcm ²	0.05	0.05	0.04	0.04
				10 ⁻³ in.lb.s ²	0.04	0.04	0.04	0.04
	C	14	J_1	kgcm ²	0.14	0.13	0.13	0.13
				10 ⁻³ in.lb.s ²	0.12	0.12	0.12	0.12

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft




1-stage

Motor shaft diameter [mm]

up to 11⁴⁾ (B)⁵⁾
clamping hub diameter



up to 14⁴⁾ (C)
clamping hub diameter

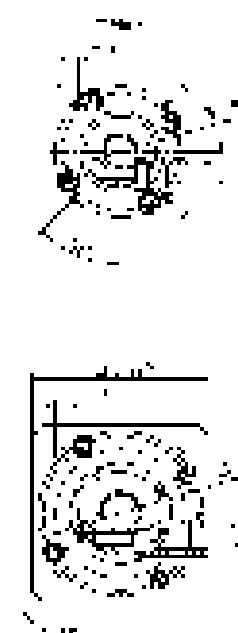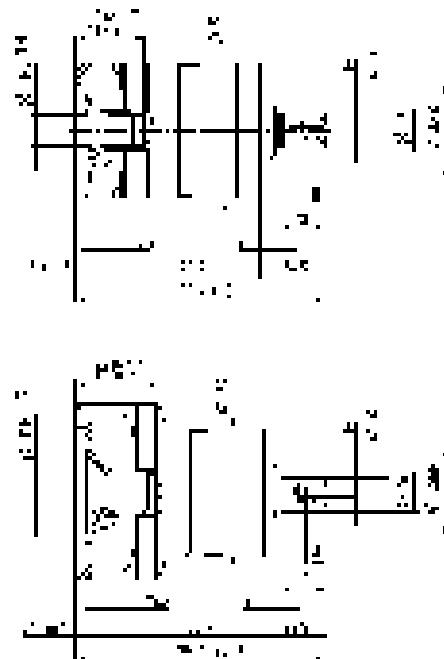

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NP 005 MF 2-stage

			2-stage										
Ratio	i		16	20	25	28	35	40	50	64	70	100	
Max. torque ^{a) b) e)}	T_{2a}	Nm	18	18	22	18	22	18	22	21	22	21	
		in.lb	159	159	195	159	195	159	195	186	195	186	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	11	11	14	11	14	11	14	13	14	13	
		in.lb	97	97	124	97	124	97	124	115	124	115	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	26	26	26	26	26	26	26	26	26	26	
		in.lb	230	230	230	230	230	230	230	230	230	230	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)		n_{1N}	rpm	4000	4000	4000	4300	4300	4600	4600	4400	4600	
Max. input speed		n_{1Max}	rpm	10000	10000	10000	10000	10000	10000	10000	10000	10000	
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	0.11	0.1	0.1	0.09	0.09	0.08	0.08	0.08	0.08	0.08	
		in.lb	0.97	0.89	0.89	0.8	0.8	0.71	0.71	0.71	0.71	0.71	
Max. backlash	j_t	arcmin	≤ 13										
Torsional rigidity ^{b)}	C_{t21}	Nm/arcmin	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.85	1.2	0.85	
		in.lb/arcmin	11	11	11	11	11	11	11	7.5	11	7.5	
Max. axial force ^{c)}	F_{2AMax}	N	700										
		lb _f	158										
Max. lateral force ^{c)}	F_{2QMax}	N	800										
		lb _f	180										
Max. tilting moment	M_{2KMax}	Nm	23										
		in.lb	204										
Efficiency at full load	η	%	95										
Service life	L_h	h	> 20000										
Weight (incl. standard adapter plate)	m	kg	0.9										
		lb _m	2										
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 58										
Max. permitted housing temperature		°C	+90										
		°F	+194										
Ambient temperature		°C	-15 to +40										
		°F	+5 to +104										
Lubrication			Lubricated for life										
Direction of rotation			In- and output same direction										
Protection class			IP 64										
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0005BA012.000-X										
Bore diameter of coupling on the application side		mm	X = 004.000 - 012.700										
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z	8	J_t	kgcm ²	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	
				10 ⁻³ in.lb.s ²	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	
	A	9	J_t	kgcm ²	0.03	0.03	0.02	0.03	0.03	0.02	0.02	0.02	
				10 ⁻³ in.lb.s ²	0.03	0.03	0.02	0.03	0.03	0.02	0.02	0.02	
	B	11	J_t	kgcm ²	0.05	0.05	0.04	0.05	0.04	0.04	0.04	0.04	
				10 ⁻³ in.lb.s ²	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	
	C	14	J_t	kgcm ²	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	
				10 ⁻³ in.lb.s ²	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange


^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft






2-stage

Motor shaft diameter [mm]

up to 11⁴⁾ (B)⁵⁾
clamping hub diameter




up to 14⁴⁾ (C)
clamping hub diameter

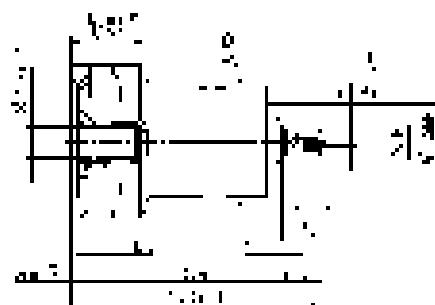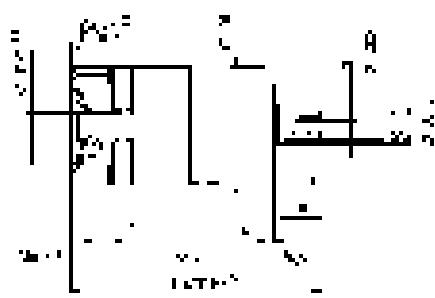

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NP 015 MF 1-stage

			1-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	51	56	64	64	56	56
		in.lb	451	496	566	566	496	496
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	32	35	40	40	35	35
		in.lb	283	310	354	354	310	310
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	80	80	80	80	80	80
		in.lb	708	708	708	708	708	708
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	3300	3500	3700	4000	4100	4300
Max. input speed	n_{1Max}	rpm	8000	8000	8000	8000	8000	8000
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	0.24	0.2	0.17	0.14	0.13	0.12
		in.lb	2.1	1.8	1.5	1.2	1.2	1.1
Max. backlash	j_t	arcmin				≤ 8		
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	3.3	3.3	3.3	3.3	2.8	2.8
		in.lb/arcmin	29	29	29	29	25	25
Max. axial force ^{c)}	F_{2AMax}	N			1550			
		lb _f			349			
Max. lateral force ^{c)}	F_{2QMax}	N			1700			
		lb _f			383			
Max. tilting moment	M_{2KMax}	Nm			72			
		in.lb			637			
Efficiency at full load	η	%			97			
Service life	L_h	h			> 20000			
Weight (incl. standard adapter plate)	m	kg			1.9			
		lb _m			4.2			
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)			≤ 59			
Max. permitted housing temperature		°C			+90			
		°F			+194			
Ambient temperature		°C			-15 to +40			
		°F			+5 to +104			
Lubrication					Lubricated for life			
Direction of rotation					In- and output same direction			
Protection class					IP 64			
Elastomer coupling (recommended product type – validate sizing with cymex®)					ELC-0060BA016.000-X			
		mm			X = 012.000 - 032.000			
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A 9	J_1	kgcm ²	0.22	0.18	0.16	0.14	0.14
			10 ³ in.lb.s ²	0.19	0.16	0.14	0.12	0.12
	B 11	J_1	kgcm ²	0.24	0.19	0.18	0.16	0.15
			10 ³ in.lb.s ²	0.21	0.17	0.16	0.14	0.13
	C 14	J_1	kgcm ²	0.32	0.27	0.25	0.23	0.22
			10 ³ in.lb.s ²	0.28	0.24	0.22	0.2	0.19
	D 16	J_1	kgcm ²	0.45	0.4	0.38	0.36	0.36
			10 ³ in.lb.s ²	0.4	0.35	0.34	0.32	0.31
	E 19	J_1	kgcm ²	0.53	0.48	0.46	0.44	0.44
			10 ³ in.lb.s ²	0.47	0.42	0.41	0.39	0.38

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange


^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft



1-stage

Motor shaft diameter [mm]

up to 14⁴⁾ (C)⁵⁾
clamping hub diameter




up to 19⁴⁾ (E)
clamping hub diameter

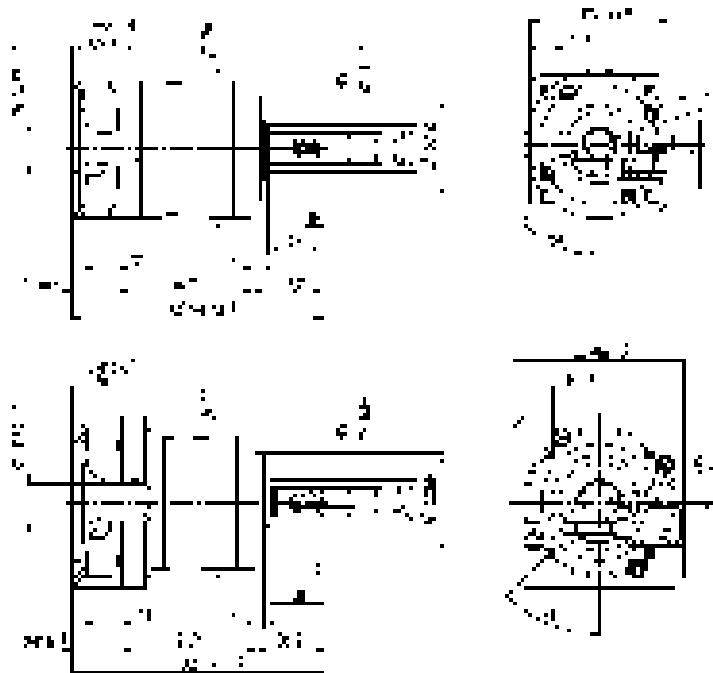

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NP 015 MF 2-stage

			2-stage															
Ratio	i		12	15	16	20	25	28	30	32	35	40	50	64	70	100		
Max. torque ^{a) b) e)}	T_{2a}	Nm	51	51	56	56	64	56	51	56	64	56	64	56	64	56	56	
		in.lb	451	451	496	496	566	496	451	496	566	496	566	496	566	496	496	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	32	32	35	35	40	35	32	35	40	35	40	35	40	35	35	
		in.lb	283	283	310	310	354	310	283	310	354	310	354	310	354	310	354	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	
		in.lb	708	708	708	708	708	708	708	708	708	708	708	708	708	708	708	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)		n_{1N}	rpm	3800	4000	3800	4000	4000	4300	4600	4400	4300	4600	4600	4400	4600	4600	
Max. input speed		n_{1Max}	rpm	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	0.13	0.11	0.12	0.11	0.1	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.08	0.08	0.08	
		in.lb	1.2	0.97	1.1	0.97	0.89	0.8	0.8	0.8	0.8	0.71	0.71	0.71	0.71	0.71	0.71	
Max. backlash	j_i	arcmin	≤ 10															
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	3.3	3.3	3.3	3.3	3.3	3.3	4	3.3	3.3	3.3	3.3	2.8	3.3	2.8		
		in.lb/arcmin	29	29	29	29	29	29	35	29	29	29	29	25	29	25		
Max. axial force ^{c)}	F_{2AMax}	N	1550															
		lb _f	349															
Max. lateral force ^{c)}	F_{2QMax}	N	1700															
		lb _f	383															
Max. tilting moment	M_{2KMax}	Nm	72															
		in.lb	637															
Efficiency at full load	η	%	95															
Service life	L_h	h	> 20000															
Weight (incl. standard adapter plate)	m	kg	1.9															
		lb _m	4.2															
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 58															
Max. permitted housing temperature		°C	+90															
		°F	+194															
Ambient temperature		°C	-15 to +40															
		°F	+5 to +104															
Lubrication			Lubricated for life															
Direction of rotation			In- and output same direction															
Protection class			IP 64															
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA016.000-X															
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z 8	J_i	kgcm ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	
			10 ⁻³ in.lb.s ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	
	A 9	J_i	kgcm ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	
			10 ⁻³ in.lb.s ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	
	B 11	J_i	kgcm ²	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	
			10 ⁻³ in.lb.s ²	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	
	C 14	J_i	kgcm ²	0.14	0.14	0.14	0.13	0.13	0.13	0.14	0.13	0.13	0.13	0.13	0.13	0.13	0.13	
			10 ⁻³ in.lb.s ²	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange


^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft






2-stage

Motor shaft diameter [mm]

up to 11⁴⁾ (B)⁵⁾
clamping hub diameter




up to 14⁴⁾ (C)
clamping hub diameter

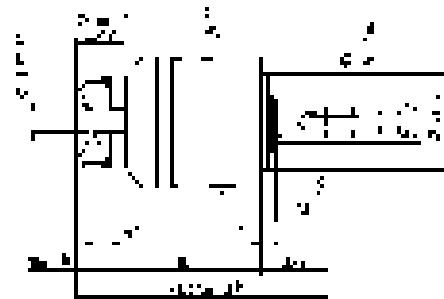

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NP 025 MF 1-stage

			1-stage							
Ratio	i		3	4	5	7	8	10		
Max. torque ^{a) b) e)}	T_{2a}	Nm	128	152	160	160	144	144		
		in.lb	1133	1345	1416	1416	1275	1275		
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	80	95	100	100	90	90		
		in.lb	708	841	885	885	797	797		
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	190	190	190	190	190	190		
		in.lb	1682	1682	1682	1682	1682	1682		
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	3100	3300	3400	3600	3700	3900		
Max. input speed	n_{1Max}	rpm	7000	7000	7000	7000	7000	7000		
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	0.38	0.31	0.26	0.21	0.19	0.17		
		in.lb	3.4	2.7	2.3	1.9	1.7	1.5		
Max. backlash	j_t	arcmin				≤ 8				
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	9.5	9.5	9.5	9.5	8.5	8.5		
		in.lb/arcmin	84	84	84	84	75	75		
Max. axial force ^{c)}	F_{2AMax}	N			1900					
		lb _f			428					
Max. lateral force ^{c)}	F_{2QMax}	N			2800					
		lb _f			630					
Max. tilting moment	M_{2KMax}	Nm			137					
		in.lb			1213					
Efficiency at full load	η	%			97					
Service life	L_h	h			> 20000					
Weight (incl. standard adapter plate)	m	kg			3.8					
		lb _m			8.4					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)			≤ 61					
Max. permitted housing temperature		°C			+90					
		°F			+194					
Ambient temperature		°C			-15 to +40					
		°F			+5 to +104					
Lubrication					Lubricated for life					
Direction of rotation					In- and output same direction					
Protection class					IP 64					
Elastomer coupling (recommended product type – validate sizing with cymex®)					ELC-0060BA022.000-X					
Bore diameter of coupling on the application side		mm			X = 012.000 - 032.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	kgcm ²	0.57	0.46	0.37	0.3	0.27	0.25
				10 ⁻³ in.lb.s ²	0.5	0.41	0.33	0.27	0.24	0.22
	D	16	J_1	kgcm ²	0.71	0.61	0.52	0.43	0.42	0.4
				10 ⁻³ in.lb.s ²	0.63	0.54	0.46	0.38	0.37	0.35
	E	19	J_1	kgcm ²	0.8	0.7	0.61	0.53	0.51	0.49
				10 ⁻³ in.lb.s ²	0.71	0.62	0.54	0.47	0.45	0.43
	G	24	J_1	kgcm ²	1.8	1.7	1.6	1.6	1.5	1.5
				10 ⁻³ in.lb.s ²	1.6	1.5	1.4	1.4	1.3	1.3
	H	28	J_1	kgcm ²	1.5	1.4	1.3	1.3	1.2	1.2
				10 ⁻³ in.lb.s ²	1.3	1.2	1.2	1.2	1.1	1.1

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange


^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft



1-stage

Motor shaft diameter [mm]

up to 19⁴⁾ (E)⁵⁾
clamping hub diameter



up to 28⁴⁾ (H)
clamping hub diameter

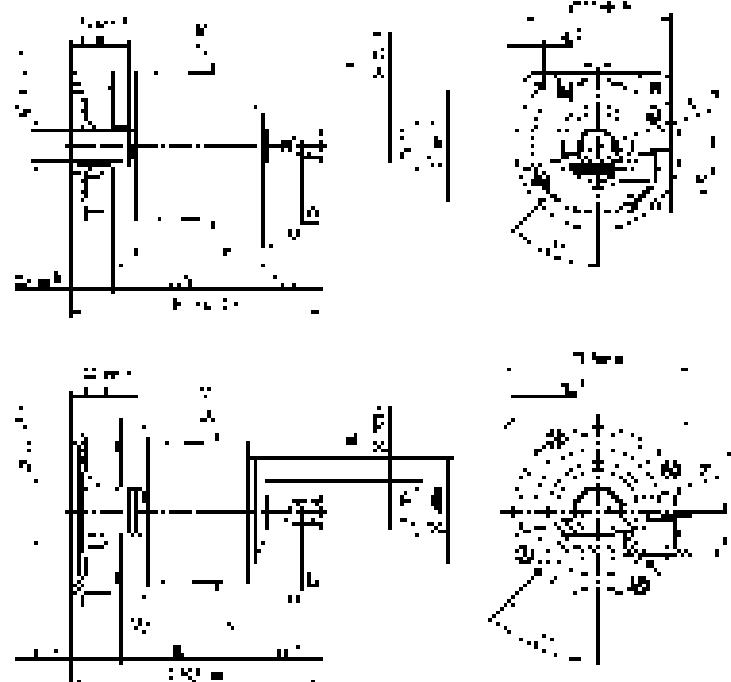

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

- ¹⁾ Check motor shaft fit
- ²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha
- ³⁾ The dimensions depend on the motor
- ⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm
- ⁵⁾ Standard clamping hub diameter

NP 025 MF 2-stage

			2-stage															
Ratio	i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100	
Max. torque ^{a) b) e)}	T_{2a}	Nm	128	128	128	152	152	160	152	128	152	160	152	160	144	160	144	
		in.lb	1133	1133	1133	1345	1345	1416	1345	1133	1345	1416	1345	1416	1275	1416	1275	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	80	80	80	95	95	100	95	80	95	100	95	100	90	100	90	
		in.lb	708	708	708	841	841	885	841	708	841	885	841	885	797	885	797	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	190	190	190	190	190	190	190	190	190	190	190	190	190	190	190	
		in.lb	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	3300	3500	3700	3500	3700	3700	4000	4300	4100	4000	4300	4300	4100	4300	4300	
Max. input speed	n_{1Max}	rpm	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.22	0.18	0.16	0.16	0.15	0.14	0.12	0.12	0.12	0.12	0.11	0.11	0.1	0.1	0.09	
		in.lb	1.9	1.6	1.4	1.4	1.3	1.2	1.1	1.1	1.1	1.1	0.97	0.89	0.89	0.89	0.8	
Max. backlash	j_t	arcmin	≤ 10															
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	8.5	9.5	8.5	
		in.lb/arcmin	84	84	84	84	84	84	84	84	84	84	84	84	75	84	75	
Max. axial force ^{c)}	F_{2AMax}	N	1900															
		lb _f	428															
Max. lateral force ^{c)}	F_{2QMax}	N	2800															
		lb _f	630															
Max. tilting moment	M_{2KMax}	Nm	137															
		in.lb	1213															
Efficiency at full load	η	%	95															
Service life	L_h	h	> 20000															
Weight (incl. standard adapter plate)	m	kg	4.1															
		lb _m	9.1															
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 59															
Max. permitted housing temperature		°C	+90															
		°F	+194															
Ambient temperature		°C	-15 to +40															
		°F	+5 to +104															
Lubrication			Lubricated for life															
Direction of rotation			In- and output same direction															
Protection class			IP 64															
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA022.000-X															
		mm	X = 012.000 - 032.000															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A 9	J_1	kgcm ²	0.26	0.22	0.21	0.21	0.2	0.2	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	
			10 ³ in.lb.s ²	0.23	0.19	0.19	0.19	0.18	0.18	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	
	B 11	J_1	kgcm ²	0.28	0.24	0.23	0.23	0.22	0.22	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21
			10 ³ in.lb.s ²	0.25	0.21	0.2	0.2	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	
	C 14	J_1	kgcm ²	0.35	0.31	0.3	0.3	0.3	0.29	0.29	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28
			10 ³ in.lb.s ²	0.31	0.27	0.27	0.27	0.27	0.26	0.26	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
D 16	J_1	kgcm ²	0.48	0.44	0.43	0.43	0.42	0.42	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41	
			10 ³ in.lb.s ²	0.42	0.39	0.38	0.38	0.37	0.37	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36
E 19	J_1	kgcm ²	0.56	0.52	0.51	0.51	0.51	0.5	0.5	0.5	0.5	0.5	0.49	0.49	0.49	0.49	0.49	
			10 ³ in.lb.s ²	0.5	0.46	0.45	0.45	0.45	0.44	0.44	0.44	0.44	0.43	0.43	0.43	0.43	0.43	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange


^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft





2-stage

Motor shaft diameter [mm]

up to 14⁴⁾ (C)⁵⁾
clamping hub diameter



up to 19⁴⁾ (E)
clamping hub diameter

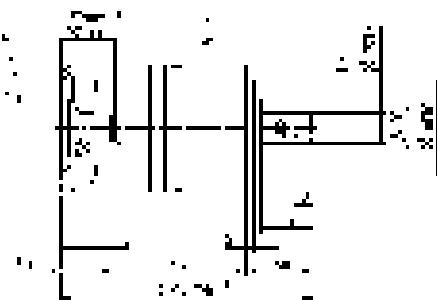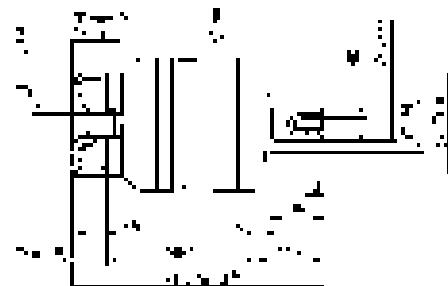

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NP 035 MF 1-stage

			1-stage						
Ratio	i		3	4	5	7	8	10	
Max. torque ^{a) b) e)}	T_{2a}	Nm	320	408	400	400	352	352	
		in.lb	2832	3611	3540	3540	3115	3115	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	200	255	250	250	220	220	
		in.lb	1770	2257	2213	2213	1947	1947	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	500	500	500	500	500	500	
		in.lb	4425	4425	4425	4425	4425	4425	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2300	2500	2600	2800	2900	3000	
Max. input speed	n_{1Max}	rpm	6000	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	1	0.85	0.76	0.66	0.63	0.58	
		in.lb	8.9	7.5	6.7	5.8	5.6	5.1	
Max. backlash	j_t	arcmin				≤ 8			
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	22	25	25	25	22	22	
		in.lb/arcmin	195	221	221	221	195	195	
Max. axial force ^{c)}	F_{2AMax}	N			4000				
		lb _f			900				
Max. lateral force ^{c)}	F_{2QMax}	N			5000				
		lb _f			1125				
Max. tilting moment	M_{2KMax}	Nm			345				
		in.lb			3054				
Efficiency at full load	η	%			97				
Service life	L_h	h			> 20000				
Weight (incl. standard adapter plate)	m	kg			9.4				
		lb _m			21				
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)			≤ 65				
Max. permitted housing temperature		°C			+90				
		°F			+194				
Ambient temperature		°C			-15 to +40				
		°F			+5 to +104				
Lubrication					Lubricated for life				
Direction of rotation					In- and output same direction				
Protection class					IP 64				
Elastomer coupling (recommended product type – validate sizing with cymex®)					ELC-0150BA032.000-X				
Bore diameter of coupling on the application side		mm			X = 019.000 - 036.000				
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_1	kgcm ²	2.6	1.7	1.4	1	1	0.9
			10 ³ in.lb.s ²	2.3	1.5	1.2	0.89	0.89	0.8
	G 24	J_1	kgcm ²	3.4	2.5	2.2	1.8	1.7	1.7
			10 ³ in.lb.s ²	3	2.2	1.9	1.6	1.5	1.5
	H 28	J_1	kgcm ²	3.1	2.2	1.9	1.5	1.4	1.4
			10 ³ in.lb.s ²	2.7	1.9	1.7	1.3	1.2	1.2
	I 32	J_1	kgcm ²	7.2	6.3	5.9	5.6	5.5	5.4
			10 ³ in.lb.s ²	6.4	5.6	5.2	5	4.9	4.8
	K 38	J_1	kgcm ²	8.3	7.4	7.1	6.8	6.7	6.6
			10 ³ in.lb.s ²	7.3	6.5	6.3	6	5.9	5.8

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures


^{e)} Valid for: Smooth shaft

1-stage





Motor shaft diameter [mm]

up to 24/28⁴⁾
(G^{5)/H)}

clamping hub diameter



up to 38⁴⁾ (K)
clamping hub diameter

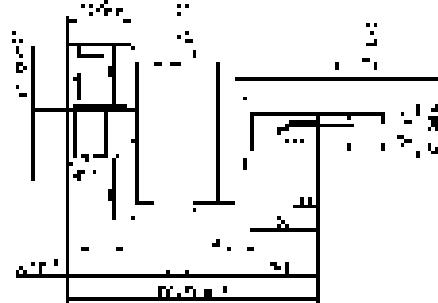

Planetary Gearboxes
Value Line

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NP 035 MF 2-stage

			2-stage																
Ratio	i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100		
Max. torque ^{a) b) e)}	T_{2a}	Nm	320	320	320	408	408	400	408	320	408	400	408	400	352	400	352		
		in.lb	2832	2832	2832	3611	3611	3540	3611	2832	3611	3540	3611	3540	3115	3540	3115		
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	200	200	200	255	255	250	255	200	255	250	255	250	220	250	220		
		in.lb	1770	1770	1770	2257	2257	2213	2257	1770	2257	2213	2257	2213	1947	2213	1947		
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500		
		in.lb	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425		
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	3100	3300	3400	3300	3400	3400	3600	3900	3700	3600	3900	3900	3700	3900	3900		
Max. input speed	n_{1Max}	rpm	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000		
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	0.45	0.36	0.3	0.32	0.27	0.25	0.22	0.19	0.2	0.2	0.18	0.17	0.17	0.16	0.15		
		in.lb	4	3.2	2.7	2.8	2.4	2.2	1.9	1.7	1.8	1.8	1.6	1.5	1.5	1.4	1.3		
Max. backlash	j_t	arcmin	≤ 10																
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	22	22	22	25	25	25	25	22	25	25	25	25	22	25	22		
		in.lb/arcmin	195	195	195	221	221	221	221	195	221	221	221	221	195	221	195		
Max. axial force ^{c)}	F_{2AMax}	N	4000																
		lb _f	900																
Max. lateral force ^{c)}	F_{2QMax}	N	5000																
		lb _f	1125																
Max. tilting moment	M_{2KMax}	Nm	345																
		in.lb	3054																
Efficiency at full load	η	%	95																
Service life	L_h	h	> 20000																
Weight (incl. standard adapter plate)	m	kg	9.8																
		lb _m	22																
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 61																
Max. permitted housing temperature		°C	+90																
		°F	+194																
Ambient temperature		°C	-15 to +40																
		°F	+5 to +104																
Lubrication			Lubricated for life																
Direction of rotation			In- and output same direction																
Protection class			IP 64																
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0150BA032.000-X																
		mm	X = 019.000 - 036.000																
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C 14	J_1	kgcm ²	0.61	0.6	0.6	0.43	0.42	0.36	0.37	0.52	0.38	0.32	0.36	0.31	0.26	0.27	0.24	
			10^3 in.lb.s^2	0.54	0.53	0.53	0.38	0.37	0.32	0.33	0.46	0.34	0.28	0.32	0.27	0.23	0.24	0.21	
	D 16	J_1	kgcm ²	0.76	0.75	0.75	0.58	0.57	0.5	0.5	0.67	0.52	0.45	0.51	0.46	0.4	0.41	0.39	
			10^3 in.lb.s^2	0.67	0.66	0.66	0.51	0.5	0.44	0.44	0.59	0.46	0.4	0.45	0.41	0.35	0.36	0.35	
	E 19	J_1	kgcm ²	0.85	0.83	0.83	0.67	0.66	0.59	0.6	0.75	0.61	0.55	0.6	0.54	0.49	0.5	0.48	
			10^3 in.lb.s^2	0.75	0.73	0.73	0.59	0.58	0.52	0.53	0.66	0.54	0.49	0.53	0.48	0.43	0.44	0.42	
G 24	J_1		kgcm ²	1.9	1.9	1.9	1.7	1.7	1.6	1.6	1.8	1.6	1.6	1.6	1.6	1.5	1.5	1.5	
			10^3 in.lb.s^2	1.7	1.7	1.7	1.5	1.5	1.4	1.4	1.6	1.4	1.4	1.4	1.4	1.3	1.3	1.3	
H 28	J_1		kgcm ²	1.6	1.6	1.6	1.4	1.4	1.3	1.3	1.5	1.4	1.3	1.3	1.3	1.2	1.2	1.2	
			10^3 in.lb.s^2	1.4	1.4	1.4	1.2	1.2	1.2	1.2	1.3	1.2	1.2	1.2	1.2	1.1	1.1	1.1	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange


^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft






2-stage

Motor shaft diameter [mm]

up to 19⁴⁾ (E)⁵⁾
clamping hub diameter



up to 28⁴⁾ (H)
clamping hub diameter

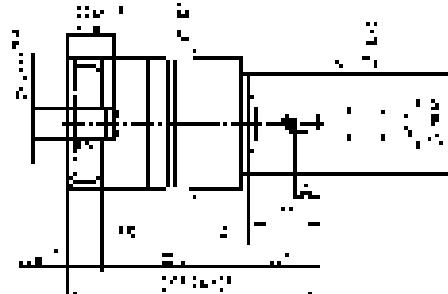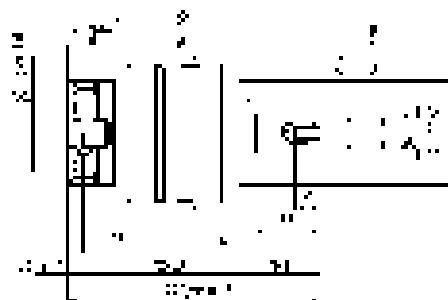

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NP 045 MF 1-/2-stage

			1-stage				2-stage									
Ratio	i		5	8	10	25	32	50	64	100						
Max. torque ^{a) b) e)}	T_{2a}	Nm	800	640	640	700	640	700	640	640						
		in.lb	7081	5665	5665	6196	5665	6196	5665	5665						
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	500	400	400	500	400	500	400	400						
		in.lb	4425	3540	3540	4425	3540	4425	3540	3540						
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	1000	1000	1000	1000	1000	1000	1000	1000						
		in.lb	8851	8851	8851	8851	8851	8851	8851	8851						
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2000	2200	2300	2600	2500	3000	2900	3000						
Max. input speed	n_{1Max}	rpm	4000	4000	4000	6000	6000	6000	6000	6000						
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	2.4	2	1.9	0.8	0.68	0.6	0.6	0.55						
		in.lb	21	18	17	7.1	6	5.3	5.3	4.9						
Max. backlash	j_t	arcmin	≤ 8				≤ 10									
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	55	44	44	55	55	55	44	44						
		in.lb/arcmin	487	389	389	487	487	487	389	389						
Max. axial force ^{c)}	F_{2AMax}	N	6000				6000									
		lb _f	1350				1350									
Max. lateral force ^{c)}	F_{2QMax}	N	8000				8000									
		lb _f	1800				1800									
Max. tilting moment	M_{2KMax}	Nm	704				704									
		in.lb	6231				6231									
Efficiency at full load	η	%	97				95									
Service life	L_h	h	> 20000				> 20000									
Weight (incl. standard adapter plate)	m	kg	19				20									
		lb _m	42				44									
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 68				≤ 65									
Max. permitted housing temperature		°C	+90				+90									
		°F	+194				+194									
Ambient temperature		°C	-15 to +40				-15 to +40									
		°F	+5 to +104				+5 to +104									
Lubrication			Lubricated for life													
Direction of rotation			In- and output same direction													
Protection class			IP 64													
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0300BA040.000-X													
Bore diameter of coupling on the application side		mm	X = 020.000 - 045.000													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_1	kgcm ²	-	-	-	1.2	1.1	1.1	0.88	0.82					
			10 ³ in.lb.s ²	-	-	-	1.1	0.97	0.97	0.78	0.73					
	G 24	J_1	kgcm ²	-	-	-	2	1.9	1.8	1.7	1.6					
			10 ³ in.lb.s ²	-	-	-	1.8	1.7	1.6	1.5	1.4					
	H 28	J_1	kgcm ²	-	-	-	1.7	1.6	1.5	1.4	1.3					
			10 ³ in.lb.s ²	-	-	-	1.5	1.4	1.3	1.2	1.2					
	I 32	J_1	kgcm ²	-	-	-	5.8	5.7	5.6	5.4	5.4					
			10 ³ in.lb.s ²	-	-	-	5.1	5	5	4.8	4.8					
	K 38	J_1	kgcm ²	8.8	7.4	7.2	7	6.9	6.8	6.6	6.5					
			10 ³ in.lb.s ²	7.8	6.5	6.4	6.2	6.1	6	5.8	5.8					

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter



^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft



1-stage

up to 38⁴⁾ (K)⁵⁾
clamping hub diameter






2-stage

up to 28⁴⁾ (H)⁵⁾
clamping hub diameter

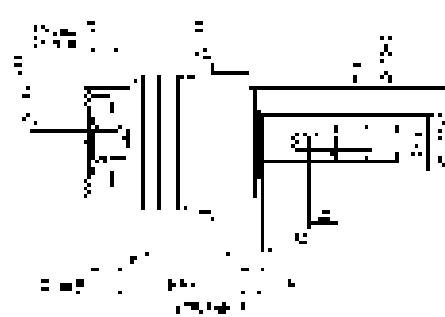


Motor shaft diameter [mm]

up to 38⁴⁾ (K)
clamping hub diameter

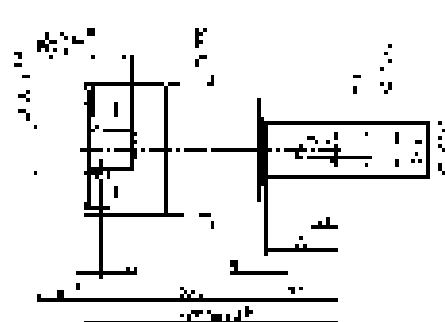

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NP 015 MA 1-/2-stage

			1-stage		2-stage												
Ratio	i		3	4	12	15	16	20	28	30	40						
Max. torque ^{a) b) e)}	T_{2a}	Nm	80	67	62	67	67	67	67	62	67						
		in.lb	708	593	549	593	593	593	593	549	593						
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	55	42	39	42	42	42	42	39	42						
		in.lb	487	372	345	372	372	372	372	345	372						
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	80	80	80	80	80	80	80	80	80						
		in.lb	708	708	708	708	708	708	708	708	708						
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	3300	3500	3800	4000	3800	4000	4300	4600	4600						
Max. input speed	n_{1Max}	rpm	8000	8000	10000	10000	10000	10000	10000	10000	10000						
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.24	0.2	0.13	0.11	0.12	0.11	0.09	0.09	0.08						
		in.lb	2.1	1.8	1.2	0.97	1.1	0.97	0.8	0.8	0.71						
Max. backlash	j_t	arcmin	≤ 8		≤ 10												
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	4	4	4	4	4	4	4	4	4						
		in.lb/arcmin	35	35	35	35	35	35	35	35	35						
Max. axial force ^{c)}	F_{2AMax}	N	1550			1550											
		lb _f	349			349											
Max. lateral force ^{c)}	F_{2QMax}	N	1700			1700											
		lb _f	383			383											
Max. tilting moment	M_{2KMax}	Nm	72			72											
		in.lb	637			637											
Efficiency at full load	η	%	97			95											
Service life	L_h	h	> 20000			> 20000											
Weight (incl. standard adapter plate)	m	kg	1.9			1.9											
		lb _m	4.2			4.2											
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 59			≤ 58											
Max. permitted housing temperature		°C	+90			+90											
		°F	+194			+194											
Ambient temperature		°C	-15 to +40			-15 to +40											
		°F	+5 to +104			+5 to +104											
Lubrication			Lubricated for life														
Direction of rotation			In- and output same direction														
Protection class			IP 64														
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA016.000-X														
		mm	X = 012.000 - 032.000														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z 8	J_1	kgcm ²	-	-	0.04	0.04	0.03	0.03	0.03	0.03						
			10 ³ in.lb.s ²	-	-	0.04	0.04	0.03	0.03	0.03	0.03						
	A 9	J_1	kgcm ²	0.22	0.18	0.04	0.04	0.03	0.03	0.03	0.03						
			10 ³ in.lb.s ²	0.19	0.16	0.04	0.04	0.03	0.03	0.03	0.03						
	B 11	J_1	kgcm ²	0.24	0.19	0.06	0.05	0.05	0.05	0.05	0.05						
			10 ³ in.lb.s ²	0.21	0.17	0.05	0.04	0.04	0.04	0.04	0.04						
	C 14	J_1	kgcm ²	0.32	0.27	0.14	0.14	0.14	0.13	0.13	0.14						
			10 ³ in.lb.s ²	0.28	0.24	0.12	0.12	0.12	0.12	0.12	0.12						
	D 16	J_1	kgcm ²	0.45	0.4	-	-	-	-	-	-						
			10 ³ in.lb.s ²	0.4	0.35	-	-	-	-	-	-						
	E 19	J_1	kgcm ²	0.53	0.48	-	-	-	-	-	-						
			10 ³ in.lb.s ²	0.47	0.42	-	-	-	-	-	-						

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures



^{e)} Valid for: Smooth shaft

1-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub diameter


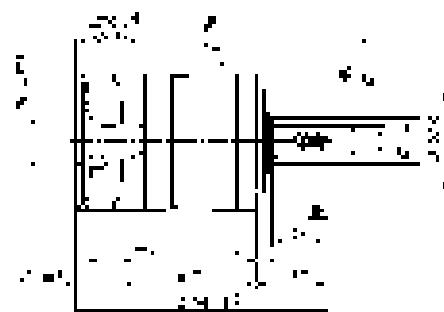



up to 19⁴⁾ (E)
clamping hub diameter






2-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub diameter

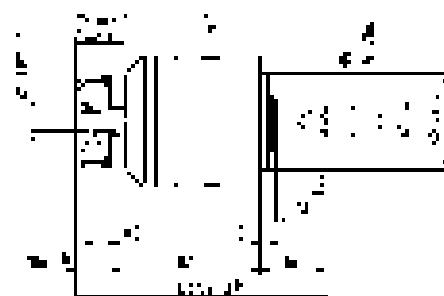

up to 14⁴⁾ (C)
clamping hub diameter

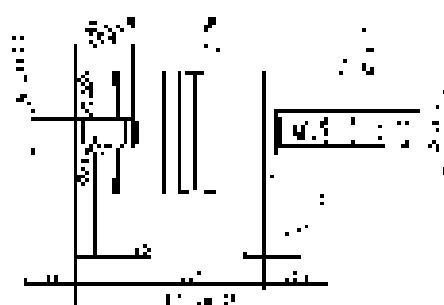

Motor shaft diameter [mm]

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NP 025 MA 1- / 2-stage

			1-stage		2-stage															
Ratio	i		3	4	9	12	15	16	20	28	30	40								
Max. torque ^{a) b) e)}	T_{2a}	Nm	185	185	185	185	185	185	185	185	168	185								
		in.lb	1637	1637	1637	1637	1637	1637	1637	1637	1487	1637								
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	125	115	125	125	120	115	115	115	105	115								
		in.lb	1106	1018	1106	1106	1062	1018	1018	1018	929	1018								
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	190	190	190	190	190	190	190	190	190	190								
		in.lb	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682								
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	3100	3300	3300	3500	3700	3500	3700	4000	4300	4300								
Max. input speed	n_{1Max}	rpm	7000	7000	8000	8000	8000	8000	8000	8000	8000	8000								
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	0.38	0.31	0.22	0.18	0.16	0.16	0.15	0.12	0.12	0.11								
		in.lb	3.4	2.7	1.9	1.6	1.4	1.4	1.3	1.1	1.1	0.97								
Max. backlash	j_i	arcmin	≤ 8		≤ 10															
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	12	12	12	12	12	12	12	10	12	12								
		in.lb/arcmin	106	106	106	106	106	106	106	89	106	106								
Max. axial force ^{c)}	F_{2AMax}	N	1900			1900														
		lb _f	428			428														
Max. lateral force ^{c)}	F_{2QMax}	N	2800			2800														
		lb _f	630			630														
Max. tilting moment	M_{2KMax}	Nm	137			137														
		in.lb	1213			1213														
Efficiency at full load	η	%	97			95														
Service life	L_h	h	> 20000			> 20000														
Weight (incl. standard adapter plate)	m	kg	3.8			4.1														
		lb _m	8.4			9.1														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 61			≤ 59														
Max. permitted housing temperature		°C	+90			+90														
		°F	+194			+194														
Ambient temperature		°C	-15 to +40			-15 to +40														
		°F	+5 to +104			+5 to +104														
Lubrication			Lubricated for life																	
Direction of rotation			In- and output same direction																	
Protection class			IP 64																	
Elastomer coupling (recommended product type – validate sizing with cymex®)		ELC-0060BA022.000-X																		
		X = 012.000 - 032.000																		
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A 9	J_1	kgcm ²	-	-	0.26	0.22	0.21	0.21	0.2	0.19	0.19								
			10 ³ in.lb.s ²	-	-	0.23	0.19	0.19	0.19	0.18	0.17	0.17								
	B 11	J_1	kgcm ²	-	-	0.28	0.24	0.23	0.23	0.22	0.21	0.21								
			10 ³ in.lb.s ²	-	-	0.25	0.21	0.2	0.2	0.19	0.19	0.19								
	C 14	J_1	kgcm ²	0.57	0.46	0.35	0.31	0.3	0.3	0.3	0.29	0.28								
			10 ³ in.lb.s ²	0.5	0.41	0.31	0.27	0.27	0.27	0.27	0.26	0.25								
	D 16	J_1	kgcm ²	0.71	0.61	0.48	0.44	0.43	0.43	0.42	0.41	0.41								
			10 ³ in.lb.s ²	0.63	0.54	0.42	0.39	0.38	0.38	0.37	0.36	0.36								
	E 19	J_1	kgcm ²	0.8	0.7	0.56	0.52	0.51	0.51	0.51	0.5	0.5								
			10 ³ in.lb.s ²	0.71	0.62	0.5	0.46	0.45	0.45	0.45	0.44	0.43								
	G 24	J_1	kgcm ²	1.8	1.7	-	-	-	-	-	-	-								
			10 ³ in.lb.s ²	1.6	1.5	-	-	-	-	-	-	-								
	H 28	J_1	kgcm ²	1.5	1.4	-	-	-	-	-	-	-								
			10 ³ in.lb.s ²	1.3	1.2	-	-	-	-	-	-	-								

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter


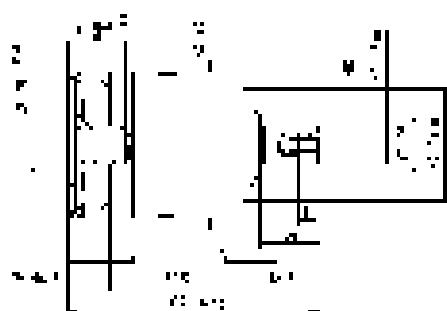



up to 28⁴⁾ (H)
clamping hub
diameter


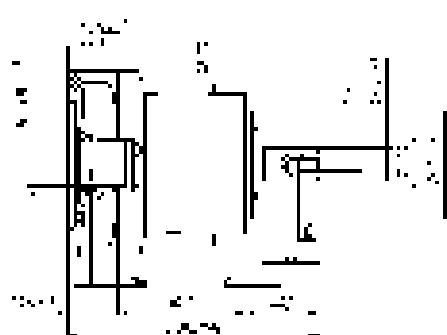



2-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

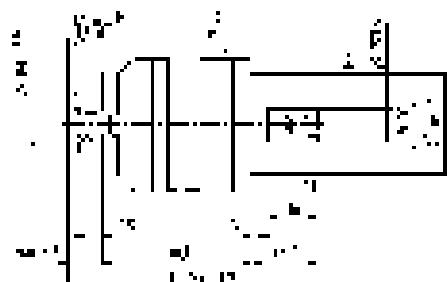

up to 19⁴⁾ (E)
clamping hub
diameter

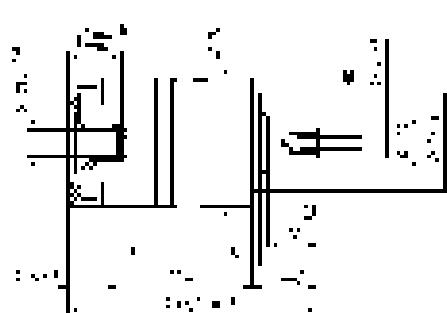

Motor shaft diameter [mm]

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NP 035 MA 1- / 2-stage

			1-stage		2-stage													
Ratio	i		3	4	9	12	15	16	20	28	30	40						
Max. torque ^{a) b) e)}	T_{2a}	Nm	480	480	480	480	480	480	480	480	432	480						
		in.lb	4248	4248	4248	4248	4248	4248	4248	4248	3824	4248						
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	305	305	305	305	300	305	305	305	270	305						
		in.lb	2699	2699	2699	2699	2655	2699	2699	2699	2390	2699						
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	500	500	500	500	500	500	500	500	500	500						
		in.lb	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425						
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2300	2500	3100	3300	3400	3300	3400	3600	3900	3900						
Max. input speed	n_{1Max}	rpm	6000	6000	7000	7000	7000	7000	7000	7000	7000	7000						
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	1	0.85	0.45	0.36	0.3	0.32	0.27	0.22	0.19	0.18						
		in.lb	8.9	7.5	4	3.2	2.7	2.8	2.4	1.9	1.7	1.6						
Max. backlash	j_t	arcmin	≤ 8		≤ 10													
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	30	30	30	30	30	30	30	30	30	30						
		in.lb/arcmin	266	266	266	266	266	266	266	266	266	266						
Max. axial force ^{c)}	F_{2AMax}	N	4000		4000													
		lb _f	900		900													
Max. lateral force ^{c)}	F_{2QMax}	N	5000		5000													
		lb _f	1125		1125													
Max. tilting moment	M_{2KMax}	Nm	345		345													
		in.lb	3054		3054													
Efficiency at full load	η	%	97		95													
Service life	L_h	h	> 20000		> 20000													
Weight (incl. standard adapter plate)	m	kg	9.4		9.8													
		lb _m	21		22													
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 65		≤ 61													
Max. permitted housing temperature		°C	+90		+90													
		°F	+194		+194													
Ambient temperature		°C	-15 to +40		-15 to +40													
		°F	+5 to +104		+5 to +104													
Lubrication			Lubricated for life															
Direction of rotation			In- and output same direction															
Protection class			IP 64															
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0150BA032.000-X															
		mm	X = 019.000 - 036.000															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C 14	J_1	kgcm ²	-	-	0.61	0.6	0.6	0.43	0.42	0.37	0.52	0.36					
			10 ³ in.lb.s ²	-	-	0.54	0.53	0.53	0.38	0.37	0.33	0.46	0.32					
	D 16	J_1	kgcm ²	-	-	0.76	0.75	0.75	0.58	0.57	0.5	0.67	0.51					
			10 ³ in.lb.s ²	-	-	0.67	0.66	0.66	0.51	0.5	0.44	0.59	0.45					
	E 19	J_1	kgcm ²	2.6	1.7	0.85	0.83	0.83	0.67	0.66	0.6	0.75	0.6					
			10 ³ in.lb.s ²	2.3	1.5	0.75	0.73	0.73	0.59	0.58	0.53	0.66	0.53					
	G 24	J_1	kgcm ²	3.4	2.5	1.9	1.9	1.9	1.7	1.7	1.6	1.8	1.6					
			10 ³ in.lb.s ²	3	2.2	1.7	1.7	1.7	1.5	1.5	1.4	1.6	1.4					
	H 28	J_1	kgcm ²	3.1	2.2	1.6	1.6	1.6	1.4	1.4	1.3	0.5	1.3					
			10 ³ in.lb.s ²	2.7	1.9	1.4	1.4	1.4	1.2	1.2	0.44	1.2						
	I 32	J_1	kgcm ²	7.2	6.3	-	-	-	-	-	-	-	-					
			10 ³ in.lb.s ²	6.4	5.6	-	-	-	-	-	-	-	-					
	K 38	J_1	kgcm ²	8.3	7.4	-	-	-	-	-	-	-	-					
			10 ³ in.lb.s ²	7.3	6.5	-	-	-	-	-	-	-	-					

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 24/28⁴⁾
(G<sup>5)/H)
clamping hub
diameter</sup>


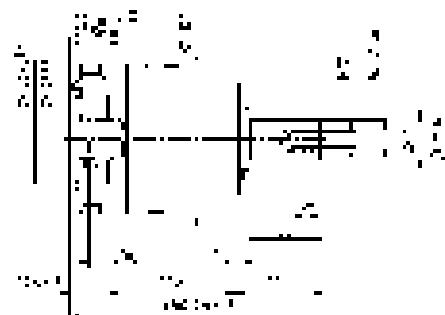



up to 38⁴⁾ (K)
clamping hub
diameter


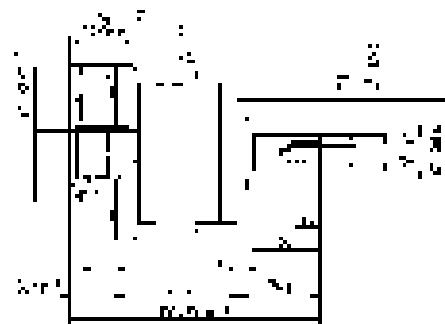



2-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

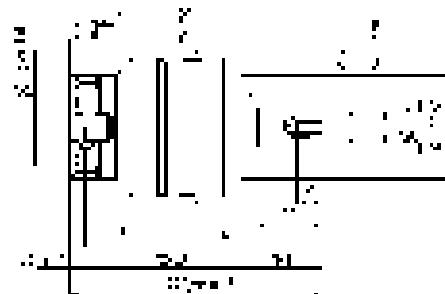


up to 28⁴⁾ (H)
clamping hub
diameter

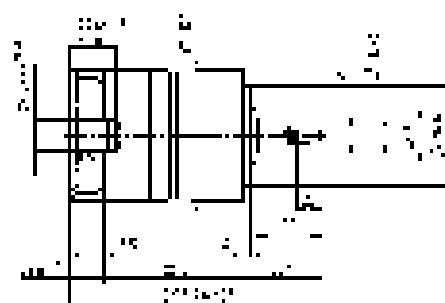

Motor shaft diameter [mm]

Other output variants

Shaft with key



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPL 015 MF 1-stage

			1-stage					
Ratio	i		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	51	56	64	64	56	56
		in.lb	451	496	566	566	496	496
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	32	35	40	40	35	35
		in.lb	283	310	354	354	310	310
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	80	80	80	80	80	80
		in.lb	708	708	708	708	708	708
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2900	3100	3300	3600	3600	3800
Max. input speed	n_{1Max}	rpm	8000	8000	8000	8000	8000	8000
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	0.92	0.74	0.62	0.51	0.47	0.41
		in.lb	8.1	6.5	5.5	4.5	4.2	3.6
Max. backlash	j_t	arcmin				≤ 8		
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	3.3	3.3	3.3	3.3	2.8	2.8
		in.lb/arcmin	29	29	29	29	25	25
Max. axial force ^{c)}	F_{2AMax}	N			2400			
		lb _f			540			
Max. lateral force ^{c)}	F_{2QMax}	N			2800			
		lb _f			630			
Max. tilting moment	M_{2KMax}	Nm			152			
		in.lb			1345			
Efficiency at full load	η	%			97			
Service life	L_h	h			> 20000			
Weight (incl. standard adapter plate)	m	kg			1.9			
		lb _m			4.2			
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)			≤ 59			
Max. permitted housing temperature		°C			+90			
		°F			+194			
Ambient temperature		°C			-15 to +40			
		°F			+5 to +104			
Lubrication					Lubricated for life			
Direction of rotation					In- and output same direction			
Protection class					IP 65			
Elastomer coupling (recommended product type – validate sizing with cymex®) Bore diameter of coupling on the application side					ELC-0060BA016.000-X			
		mm			X = 012.000 - 032.000			
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A 9	J_1	kgcm ²	0.25	0.19	0.17	0.14	0.14
			10 ³ in.lb.s ²	0.22	0.17	0.15	0.12	0.12
	B 11	J_1	kgcm ²	0.26	0.21	0.18	0.16	0.16
			10 ³ in.lb.s ²	0.23	0.19	0.16	0.14	0.14
	C 14	J_1	kgcm ²	0.34	0.28	0.26	0.24	0.23
			10 ³ in.lb.s ²	0.3	0.25	0.23	0.21	0.2
	D 16	J_1	kgcm ²	0.47	0.41	0.39	0.36	0.36
			10 ³ in.lb.s ²	0.42	0.36	0.35	0.32	0.31
	E 19	J_1	kgcm ²	0.55	0.49	0.47	0.45	0.44
			10 ³ in.lb.s ²	0.49	0.43	0.42	0.4	0.39

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange


^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft




1-stage

Motor shaft diameter [mm]

up to 14⁴⁾ (C)⁵⁾
clamping hub diameter



up to 19⁴⁾ (E)
clamping hub diameter

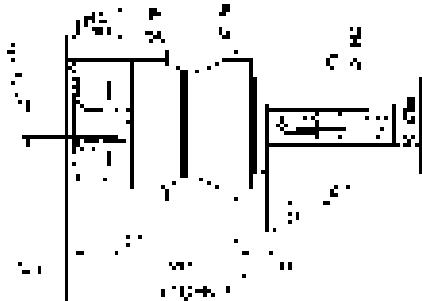


Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)

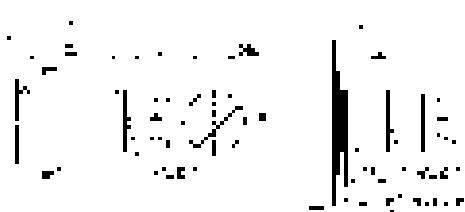

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPL 015 MF 2-stage

			2-stage															
Ratio	i		12	15	16	20	25	28	30	32	35	40	50	64	70	100		
Max. torque ^{a) b) e)}	T_{2a}	Nm	51	51	56	56	64	56	51	56	64	56	64	56	64	56	56	
		in.lb	451	451	496	496	566	496	451	496	566	496	566	496	566	496	496	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	32	32	35	35	40	35	32	35	40	35	40	35	40	35	35	
		in.lb	283	283	310	310	354	310	283	310	354	310	354	310	354	310	354	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	
		in.lb	708	708	708	708	708	708	708	708	708	708	708	708	708	708	708	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)		n_{1N}	rpm	3800	4000	3800	4000	4000	4300	4600	4400	4300	4600	4600	4400	4600	4600	
Max. input speed		n_{1Max}	rpm	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	0.34	0.29	0.29	0.25	0.23	0.21	0.21	0.2	0.2	0.19	0.17	0.17	0.16	0.15	0.15	
		in.lb	3	2.6	2.6	2.2	2	1.9	1.9	1.8	1.8	1.7	1.5	1.5	1.4	1.3	1.3	
Max. backlash	j_t	arcmin	≤ 10															
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	2.8	3.3	2.8	
		in.lb/arcmin	29	29	29	29	29	29	29	29	29	29	29	29	25	29	25	
Max. axial force ^{c)}	F_{2AMax}	N	2400															
		lb _f	540															
Max. lateral force ^{c)}	F_{2QMax}	N	2800															
		lb _f	630															
Max. tilting moment	M_{2KMax}	Nm	152															
		in.lb	1345															
Efficiency at full load	η	%	95															
Service life	L_h	h	> 20000															
Weight (incl. standard adapter plate)	m	kg	2															
		lb _m	4.4															
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 58															
Max. permitted housing temperature		°C	+90															
		°F	+194															
Ambient temperature		°C	-15 to +40															
		°F	+5 to +104															
Lubrication			Lubricated for life															
Direction of rotation			In- and output same direction															
Protection class			IP 65															
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA016.000-X															
		mm	X = 012.000 - 032.000															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z 8	J_t	kgcm ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	
			10 ⁻³ in.lb.s ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	
	A 9	J_t	kgcm ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	
			10 ⁻³ in.lb.s ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	
	B 11	J_t	kgcm ²	0.06	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04
			10 ⁻³ in.lb.s ²	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	
	C 14	J_t	kgcm ²	0.14	0.14	0.14	0.13	0.13	0.13	0.14	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13
			10 ⁻³ in.lb.s ²	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange




^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft



2-stage

Motor shaft diameter [mm]

up to 11⁴⁾ (B)⁵⁾
clamping hub diameter

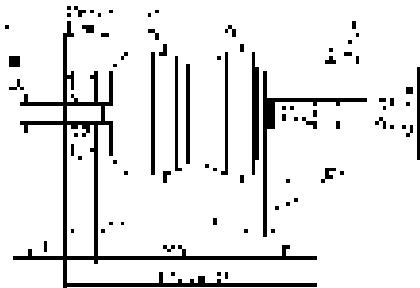

up to 14⁴⁾ (C)
clamping hub diameter

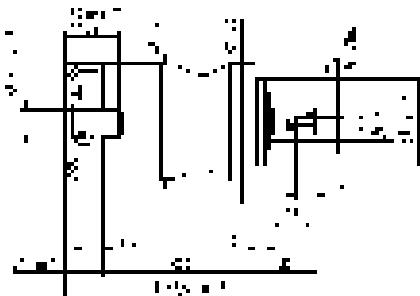

Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPL 025 MF 1-stage

			1-stage						
Ratio	i		3	4	5	7	8	10	
Max. torque ^{a) b) e)}	T_{2a}	Nm	128	152	160	160	144	144	
		in.lb	1133	1345	1416	1416	1275	1275	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	80	95	100	100	90	90	
		in.lb	708	841	885	885	797	797	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	190	190	190	190	190	190	
		in.lb	1682	1682	1682	1682	1682	1682	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2700	2900	3000	3200	3300	3500	
Max. input speed	n_{1Max}	rpm	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	1.8	1.5	1.3	1.1	1	0.94	
		in.lb	16	13	12	9.7	8.9	8.3	
Max. backlash	j_t	arcmin				≤ 8			
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	9.5	9.5	9.5	9.5	8.5	8.5	
		in.lb/arcmin	84	84	84	84	75	75	
Max. axial force ^{c)}	F_{2AMax}	N			3350				
		lb _f			754				
Max. lateral force ^{c)}	F_{2QMax}	N			4200				
		lb _f			945				
Max. tilting moment	M_{2KMax}	Nm			236				
		in.lb			2089				
Efficiency at full load	η	%			97				
Service life	L_h	h			> 20000				
Weight (incl. standard adapter plate)	m	kg			3.9				
		lb _m			8.6				
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)			≤ 61				
Max. permitted housing temperature		°C			+90				
		°F			+194				
Ambient temperature		°C			-15 to +40				
		°F			+5 to +104				
Lubrication					Lubricated for life				
Direction of rotation					In- and output same direction				
Protection class					IP 65				
Elastomer coupling (recommended product type – validate sizing with cymex®) Bore diameter of coupling on the application side					ELC-0060BA022.000-X				
		mm			X = 012.000 - 032.000				
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C 14	J_1	kgcm ²	0.58	0.47	0.38	0.3	0.28	0.26
			10 ⁻³ in.lb.s ²	0.51	0.42	0.34	0.27	0.25	0.23
	D 16	J_1	kgcm ²	0.73	0.62	0.53	0.43	0.42	0.4
			10 ⁻³ in.lb.s ²	0.65	0.55	0.47	0.38	0.37	0.35
	E 19	J_1	kgcm ²	0.81	0.71	0.61	0.53	0.51	0.49
			10 ⁻³ in.lb.s ²	0.72	0.63	0.54	0.47	0.45	0.43
	G 24	J_1	kgcm ²	1.8	1.7	1.6	1.6	1.5	1.5
			10 ⁻³ in.lb.s ²	1.6	1.5	1.4	1.4	1.3	1.3
	H 28	J_1	kgcm ²	1.6	1.4	1.4	1.3	1.3	1.2
			10 ⁻³ in.lb.s ²	1.4	1.2	1.2	1.2	1.2	1.1

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange


^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft




1-stage

Motor shaft diameter [mm]

up to 19⁴⁾ (E)⁵⁾
clamping hub diameter




up to 28⁴⁾ (H)
clamping hub diameter

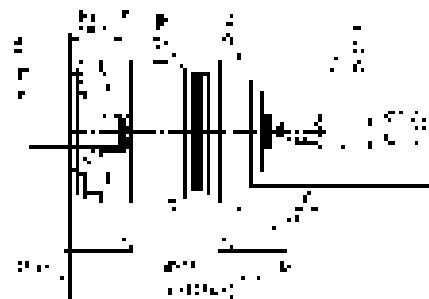


Planetary Gearboxes
Value Line

Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPL 025 MF 2-stage

			2-stage															
Ratio	i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100	
Max. torque ^{a) b) e)}	T_{2a}	Nm	128	128	128	152	152	160	152	128	144	160	152	160	144	160	144	
		in.lb	1133	1133	1133	1345	1345	1416	1345	1133	1275	1416	1345	1416	1275	1416	1275	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	80	80	80	95	95	100	95	80	90	100	95	100	90	100	90	
		in.lb	708	708	708	841	841	885	841	708	797	885	841	885	797	885	797	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	190	190	190	190	190	190	190	190	190	190	190	190	190	190	190	
		in.lb	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2900	3500	3700	3500	3700	3700	4000	4300	4100	4000	4300	4300	4100	4300	4300	
Max. input speed	n_{1Max}	rpm	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.67	0.55	0.47	0.46	0.4	0.36	0.34	0.33	0.32	0.31	0.29	0.27	0.25	0.25	0.23	
		in.lb	5.9	4.9	4.2	4.1	3.5	3.2	3	2.9	2.8	2.7	2.6	2.4	2.2	2.2	2	
Max. backlash	j_t	arcmin	≤ 10															
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	10	10	10	10	10	9.5	10	10	10	9.5	10	9.5	8.5	9.5	8.5	
		in.lb/arcmin	89	89	89	89	89	84	89	89	89	84	89	84	75	84	75	
Max. axial force ^{c)}	F_{2AMax}	N	3350															
		lb _f	754															
Max. lateral force ^{c)}	F_{2QMax}	N	4200															
		lb _f	945															
Max. tilting moment	M_{2KMax}	Nm	236															
		in.lb	2089															
Efficiency at full load	η	%	95															
Service life	L_h	h	> 20000															
Weight (incl. standard adapter plate)	m	kg	4.2															
		lb _m	9.3															
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 59															
Max. permitted housing temperature		°C	+90															
		°F	+194															
Ambient temperature		°C	-15 to +40															
		°F	+5 to +104															
Lubrication			Lubricated for life															
Direction of rotation			In- and output same direction															
Protection class			IP 65															
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA022.000-X															
		mm	X = 012.000 - 032.000															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A 9	J_1	kgcm ²	0.26	0.22	0.21	0.21	0.2	0.2	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	
			10 ³ in.lb.s ²	0.23	0.19	0.19	0.19	0.18	0.18	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	
	B 11	J_1	kgcm ²	0.28	0.24	0.23	0.23	0.22	0.22	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21
			10 ³ in.lb.s ²	0.25	0.21	0.2	0.2	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	
	C 14	J_1	kgcm ²	0.35	0.31	0.3	0.3	0.3	0.29	0.29	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28
			10 ³ in.lb.s ²	0.31	0.27	0.27	0.27	0.27	0.26	0.26	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
D 16	J_1	kgcm ²	0.48	0.44	0.43	0.43	0.42	0.42	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41	
		10 ³ in.lb.s ²	0.42	0.39	0.38	0.38	0.37	0.37	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36	
E 19	J_1	kgcm ²	0.56	0.52	0.51	0.52	0.51	0.5	0.5	0.5	0.5	0.5	0.49	0.49	0.49	0.49	0.49	
		10 ³ in.lb.s ²	0.5	0.46	0.45	0.46	0.45	0.44	0.44	0.44	0.44	0.43	0.43	0.43	0.43	0.43		

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange


^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft






2-stage

Motor shaft diameter [mm]

up to 14⁴⁾ (C)⁵⁾
clamping hub diameter



up to 19⁴⁾ (E)
clamping hub diameter

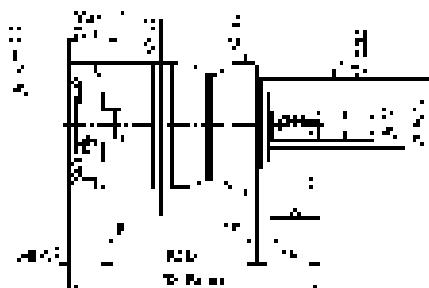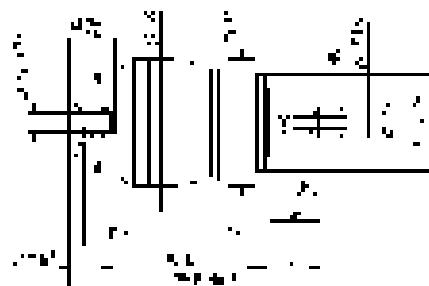



Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPL 035 MF 1-stage

			1-stage						
Ratio	i		3	4	5	7	8	10	
Max. torque ^{a) b) e)}	T_{2a}	Nm	320	408	400	400	352	352	
		in.lb	2832	3611	3540	3540	3115	3115	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	200	255	250	250	220	220	
		in.lb	1770	2257	2213	2213	1947	1947	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	500	500	500	500	500	500	
		in.lb	4425	4425	4425	4425	4425	4425	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2000	2200	2300	2500	2600	2700	
Max. input speed	n_{1Max}	rpm	6000	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	3.3	2.7	2.3	1.9	1.7	1.5	
		in.lb	29	24	20	17	15	13	
Max. backlash	j_t	arcmin			≤ 8				
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	25	25	25	25	22	22	
		in.lb/arcmin	221	221	221	221	195	195	
Max. axial force ^{c)}	F_{2AMax}	N			5650				
		lb _f			1271				
Max. lateral force ^{c)}	F_{2QMax}	N			6600				
		lb _f			1485				
Max. tilting moment	M_{2KMax}	Nm			487				
		in.lb			4310				
Efficiency at full load	η	%			97				
Service life	L_h	h			> 20000				
Weight (incl. standard adapter plate)	m	kg			9.1				
		lb _m			20				
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)			≤ 65				
Max. permitted housing temperature		°C			+90				
		°F			+194				
Ambient temperature		°C			-15 to +40				
		°F			+5 to +104				
Lubrication					Lubricated for life				
Direction of rotation					In- and output same direction				
Protection class					IP 65				
Elastomer coupling (recommended product type – validate sizing with cymex®)					ELC-0150BA032.000-X				
Bore diameter of coupling on the application side		mm			X = 019.000 - 036.000				
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_1	kgcm ²	2.5	1.7	1.3	1	0.94	0.87
			10 ⁻³ in.lb.s ²	2.2	1.5	1.2	0.89	0.83	0.77
	G 24	J_1	kgcm ²	3.3	2.4	2.1	1.8	1.7	1.6
			10 ⁻³ in.lb.s ²	2.9	2.1	1.9	1.6	1.5	1.4
	H 28	J_1	kgcm ²	3	2.2	1.8	1.5	1.4	1.4
			10 ⁻³ in.lb.s ²	2.7	1.9	1.6	1.3	1.2	1.2
	I 32	J_1	kgcm ²	7.1	6.2	5.9	5.6	5.5	5.4
			10 ⁻³ in.lb.s ²	6.3	5.5	5.2	5	4.9	4.8
	K 38	J_1	kgcm ²	8.3	7.4	7.1	6.7	6.6	6.6
			10 ⁻³ in.lb.s ²	7.3	6.5	6.3	5.9	5.8	5.8

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures


^{e)} Valid for: Smooth shaft

1-stage






Motor shaft diameter [mm]

up to 24/28⁴⁾
(G^{5)/H)}

clamping hub diameter



up to 38⁴⁾ (K)
clamping hub diameter

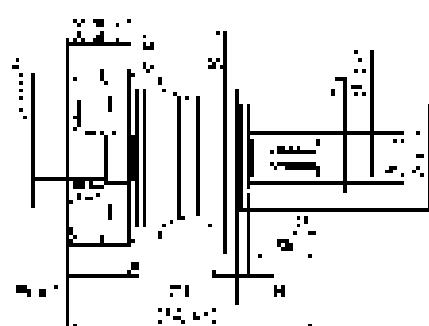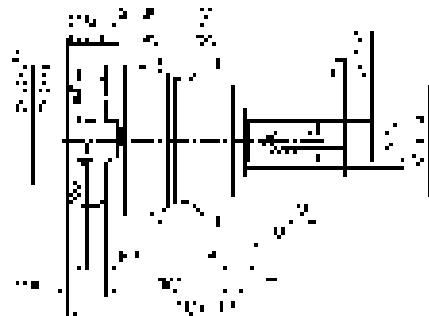


Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)

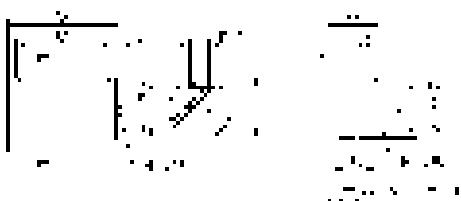

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPL 035 MF 2-stage

			2-stage															
Ratio	i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100	
Max. torque ^{a) b) e)}	T_{2a}	Nm	320	320	320	408	408	400	408	320	408	400	408	400	352	400	352	
		in.lb	2832	2832	2832	3611	3611	3540	3611	2832	3611	3540	3611	3540	3115	3540	3115	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	200	200	200	255	255	250	255	200	255	250	255	250	220	250	220	
		in.lb	1770	1770	1770	2257	2257	2213	2257	1770	2257	2213	2257	2213	1947	2213	1947	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	
		in.lb	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2700	3300	3400	3300	3400	3400	3600	3900	3700	3600	3900	3900	3700	3900	3900	
Max. input speed	n_{1Max}	rpm	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	1.7	1.4	1.2	1.2	1.1	1	0.93	0.88	0.88	0.87	0.81	0.77	0.75	0.72	0.68	
		in.lb	15	12	11	11	9.7	8.9	8.2	7.8	7.8	7.7	7.2	6.8	6.6	6.4	6	
Max. backlash	j_t	arcmin	≤ 10															
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	25	25	25	25	25	25	25	25	25	25	25	25	25	22	25	22
		in.lb/arcmin	221	221	221	221	221	221	221	221	221	221	221	221	221	195	221	195
Max. axial force ^{c)}	F_{2AMax}	N	5650															
		lb _f	1271															
Max. lateral force ^{c)}	F_{2QMax}	N	6600															
		lb _f	1485															
Max. tilting moment	M_{2KMax}	Nm	487															
		in.lb	4310															
Efficiency at full load	η	%	95															
Service life	L_h	h	> 20000															
Weight (incl. standard adapter plate)	m	kg	9.5															
		lb _m	21															
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 61															
Max. permitted housing temperature		°C	+90															
		°F	+194															
Ambient temperature		°C	-15 to +40															
		°F	+5 to +104															
Lubrication			Lubricated for life															
Direction of rotation			In- and output same direction															
Protection class			IP 65															
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0150BA032.000-X															
		mm	X = 019.000 - 036.000															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C 14	J_1	kgcm ²	0.6	0.59	0.6	0.43	0.42	0.36	0.37	0.52	0.38	0.32	0.36	0.31	0.26	0.27	0.24
			10^3 in.lb.s^2	0.53	0.52	0.53	0.38	0.37	0.32	0.33	0.46	0.34	0.28	0.32	0.27	0.23	0.24	0.21
	D 16	J_1	kgcm ²	0.75	0.74	0.74	0.58	0.57	0.5	0.5	0.67	0.52	0.45	0.51	0.46	0.4	0.41	0.39
			10^3 in.lb.s^2	0.66	0.65	0.65	0.51	0.5	0.44	0.44	0.59	0.46	0.4	0.45	0.41	0.35	0.36	0.35
	E 19	J_1	kgcm ²	0.84	0.83	0.83	0.66	0.65	0.59	0.6	0.75	0.61	0.55	0.6	0.54	0.49	0.5	0.48
			10^3 in.lb.s^2	0.74	0.73	0.73	0.58	0.58	0.52	0.53	0.66	0.54	0.49	0.53	0.48	0.43	0.44	0.42
	G 24	J_1	kgcm ²	1.9	1.9	1.9	1.7	1.7	1.6	1.6	1.8	1.6	1.6	1.6	1.6	1.5	1.5	1.5
			10^3 in.lb.s^2	1.7	1.6	1.7	1.5	1.5	1.4	1.5	1.6	1.5	1.4	1.4	1.4	1.3	1.4	1.3
	H 28	J_1	kgcm ²	1.6	1.6	1.6	1.4	1.4	1.3	1.3	1.5	1.4	1.3	1.3	1.3	1.2	1.2	1.2
			10^3 in.lb.s^2	1.4	1.4	1.4	1.2	1.2	1.2	1.3	1.2	1.1	1.2	1.1	1.1	1.1	1.1	1.1

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange


^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft






2-stage

Motor shaft diameter [mm]

up to 19⁴⁾ (E)⁵⁾
clamping hub diameter



up to 28⁴⁾ (H)
clamping hub diameter

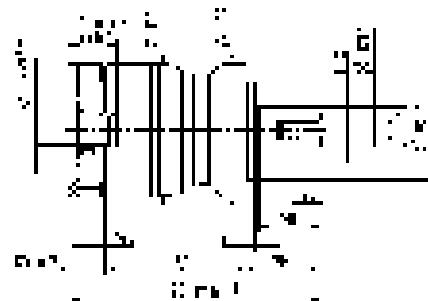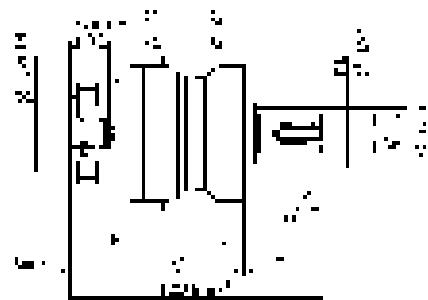

Other output variants

Shaft with key



Splined shaft (DIN 5480)

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPL 045 MF 1-/2-stage

			1-stage				2-stage									
Ratio	i		5	8	10	25	32	50	64	100						
Max. torque ^{a) b) e)}	T_{2a}	Nm	800	640	640	700	640	700	640	640						
		in.lb	7081	5665	5665	6196	5665	6196	5665	5665						
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	500	400	400	500	400	500	400	400						
		in.lb	4425	3540	3540	4425	3540	4425	3540	3540						
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	1000	1000	1000	1000	1000	1000	1000	1000						
		in.lb	8851	8851	8851	8851	8851	8851	8851	8851						
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	1800	1900	2000	2600	2500	3000	2900	3000						
Max. input speed	n_{1Max}	rpm	4000	4000	4000	6000	6000	6000	6000	6000						
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	4.2	3	2.6	1.6	1.5	1.2	1.1	0.97						
		in.lb	37	27	23	14	13	11	9.7	8.6						
Max. backlash	j_t	arcmin	≤ 8				≤ 10									
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	55	44	44	55	44	55	44	44						
		in.lb/arcmin	487	389	389	487	389	487	389	389						
Max. axial force ^{c)}	F_{2AMax}	N	9870				9870									
		lb _f	2221				2221									
Max. lateral force ^{c)}	F_{2QMax}	N	9900				9900									
		lb _f	2228				2228									
Max. tilting moment	M_{2KMax}	Nm	952				952									
		in.lb	8426				8426									
Efficiency at full load	η	%	97				95									
Service life	L_h	h	> 20000				> 20000									
Weight (incl. standard adapter plate)	m	kg	20				20									
		lb _m	44				44									
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 68				≤ 65									
Max. permitted housing temperature		°C	+90				+90									
		°F	+194				+194									
Ambient temperature		°C	-15 to +40				-15 to +40									
		°F	+5 to +104				+5 to +104									
Lubrication			Lubricated for life													
Direction of rotation			In- and output same direction													
Protection class			IP 65													
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0300BA040.000-X													
		mm	X = 020.000 - 045.000													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_1	kgcm ²	-	-	-	1.2	1.1	1	0.88	0.82					
			10 ³ in.lb.s ²	-	-	-	1.1	0.97	0.89	0.78	0.73					
	G 24	J_1	kgcm ²	-	-	-	2	1.9	1.8	1.7	1.6					
			10 ³ in.lb.s ²	-	-	-	1.8	1.7	1.6	1.5	1.4					
	H 28	J_1	kgcm ²	-	-	-	1.7	1.6	1.5	1.4	1.3					
			10 ³ in.lb.s ²	-	-	-	1.5	1.4	1.3	1.2	1.2					
	I 32	J_1	kgcm ²	-	-	-	5.8	5.7	5.6	5.4	5.4					
			10 ³ in.lb.s ²	-	-	-	5.1	5	5	4.8	4.8					
	K 38	J_1	kgcm ²	8.7	7.3	7.2	7	6.9	6.8	6.6	6.5					
			10 ³ in.lb.s ²	7.7	6.5	6.4	6.2	6.1	6	5.8	5.8					

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft


1-stage

up to 38⁴⁾ (K)⁵⁾
clamping hub diameter


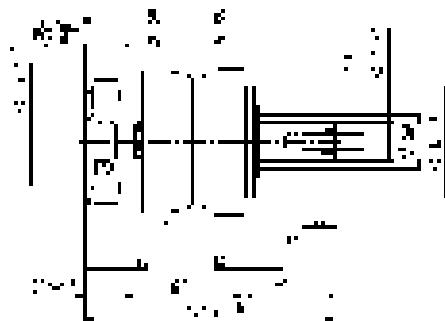



2-stage

up to 28⁴⁾ (H)⁵⁾
clamping hub diameter



up to 38⁴⁾ (K)
clamping hub diameter

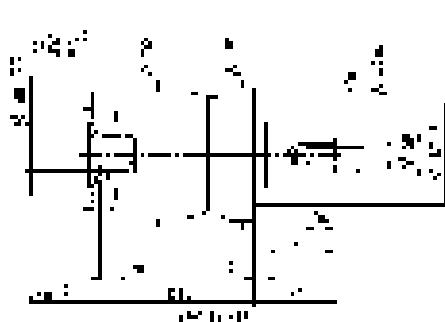


Motor shaft diameter [mm]

Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)

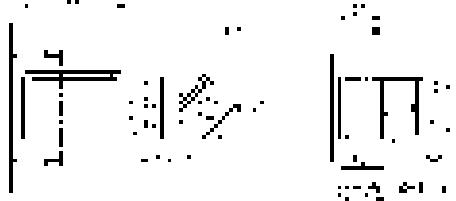

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPL 015 MA 1-/2-stage

			1-stage		2-stage							
Ratio	i		3	4	12	15	16	20	28	30	40	
Max. torque ^{a) b) e)}	T_{2a}	Nm	80	67	62	67	67	67	67	62	67	
		in.lb	708	593	549	593	593	593	593	549	593	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	55	42	39	42	42	42	42	39	42	
		in.lb	487	372	345	372	372	372	372	345	372	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	80	80	80	80	80	80	80	80	80	
		in.lb	708	708	708	708	708	708	708	708	708	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2900	3100	3800	4000	3800	4000	4300	4600	4600	
Max. input speed	n_{1Max}	rpm	8000	8000	10000	10000	10000	10000	10000	10000	10000	
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	0.92	0.74	0.34	0.29	0.29	0.25	0.21	0.21	0.19	
		in.lb	8.1	6.5	3	2.6	2.6	2.2	1.9	1.9	1.7	
Max. backlash	j_i	arcmin	≤ 8		≤ 10							
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	4	4	4	4	4	4	4	4	4	
		in.lb/arcmin	35	35	35	35	35	35	35	35	35	
Max. axial force ^{c)}	F_{2AMax}	N	2400						2400			
		lb _f	540						540			
Max. lateral force ^{c)}	F_{2QMax}	N	2800						2800			
		lb _f	630						630			
Max. tilting moment	M_{2KMax}	Nm	152						152			
		in.lb	1345						1345			
Efficiency at full load	η	%	97						95			
Service life	L_h	h	> 20000						> 20000			
Weight (incl. standard adapter plate)	m	kg	1.9						2			
		lb _m	4.2						4.4			
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 59						≤ 58			
Max. permitted housing temperature		°C	+90						+90			
		°F	+194						+194			
Ambient temperature		°C	-15 to +40						-15 to +40			
		°F	+5 to +104						+5 to +104			
Lubrication			Lubricated for life									
Direction of rotation			In- and output same direction									
Protection class			IP 65									
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA016.000-X									
		mm	X = 012.000 - 032.000									
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z	8	J_i	kgcm ²	-	-	0.04	0.04	0.03	0.03	0.03	
				10^{-3} in.lb.s ²	-	-	0.04	0.04	0.03	0.03	0.03	
	A	9	J_i	kgcm ²	0.25	0.19	0.04	0.04	0.03	0.03	0.03	
				10^{-3} in.lb.s ²	0.22	0.17	0.04	0.04	0.03	0.03	0.03	
	B	11	J_i	kgcm ²	0.26	0.21	0.06	0.06	0.05	0.05	0.05	
				10^{-3} in.lb.s ²	0.23	0.19	0.05	0.05	0.04	0.04	0.04	
	C	14	J_i	kgcm ²	0.34	0.28	0.14	0.14	0.13	0.13	0.14	
				10^{-3} in.lb.s ²	0.3	0.25	0.12	0.12	0.12	0.12	0.12	
	D	16	J_i	kgcm ²	0.47	0.41	-	-	-	-	-	
				10^{-3} in.lb.s ²	0.42	0.36	-	-	-	-	-	
	E	19	J_i	kgcm ²	0.55	0.49	-	-	-	-	-	
				10^{-3} in.lb.s ²	0.49	0.43	-	-	-	-	-	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter


^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter






up to 19⁴⁾ (E)
clamping hub
diameter

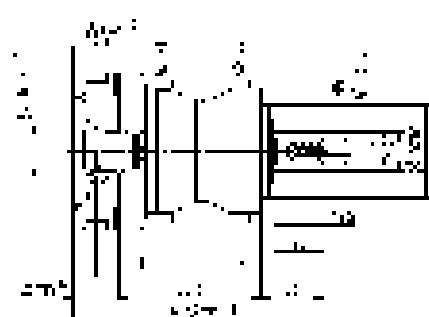



2-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

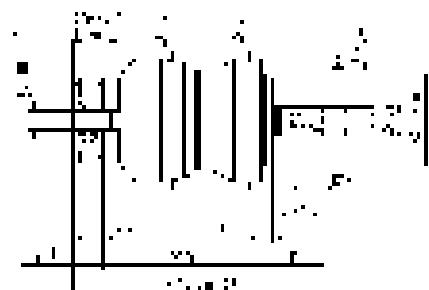

up to 14⁴⁾ (C)
clamping hub
diameter

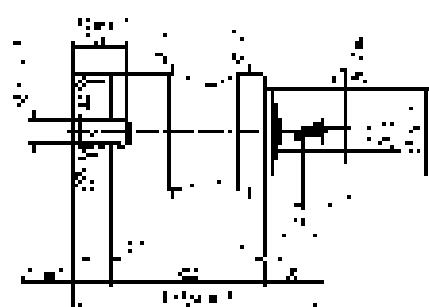

Motor shaft diameter [mm]

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPL 025 MA 1-/2-stage

			1-stage		2-stage													
Ratio	i		3	4	9	12	15	16	20	28	30	40						
Max. torque ^{a) b) e)}	T_{2a}	Nm	185	185	185	185	185	185	185	185	168	185						
		in.lb	1637	1637	1637	1637	1637	1637	1637	1637	1487	1637						
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	125	115	125	125	120	115	115	115	105	115						
		in.lb	1106	1018	1106	1106	1062	1018	1018	1018	929	1018						
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	190	190	190	190	190	190	190	190	190	190						
		in.lb	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682						
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2700	2900	2900	3500	3700	3500	3700	4000	4300	4300						
Max. input speed	n_{1Max}	rpm	7000	7000	8000	8000	8000	8000	8000	8000	8000	8000						
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	1.8	1.5	0.67	0.55	0.47	0.46	0.4	0.34	0.33	0.29						
		in.lb	16	13	5.9	4.9	4.2	4.1	3.5	3	2.9	2.6						
Max. backlash	j_t	arcmin	≤ 8		≤ 10													
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	12	12	12	12	12	12	12	12	12	12						
		in.lb/arcmin	106	106	106	106	106	106	106	106	106	106						
Max. axial force ^{c)}	F_{2AMax}	N	3350				3350											
		lb _f	754				754											
Max. lateral force ^{c)}	F_{2QMax}	N	4200				4200											
		lb _f	945				945											
Max. tilting moment	M_{2KMax}	Nm	236				236											
		in.lb	2089				2089											
Efficiency at full load	η	%	97				95											
Service life	L_h	h	> 20000				> 20000											
Weight (incl. standard adapter plate)	m	kg	3.9				4.2											
		lb _m	8.6				9.3											
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 61				≤ 59											
Max. permitted housing temperature		°C	+90				+90											
		°F	+194				+194											
Ambient temperature		°C	-15 to +40				-15 to +40											
		°F	+5 to +104				+5 to +104											
Lubrication			Lubricated for life															
Direction of rotation			In- and output same direction															
Protection class			IP 65															
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA022.000-X															
		mm	X = 012.000 - 032.000															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A 9	J_1	kgcm ²	-	-	0.26	0.22	0.21	0.21	0.2	0.19	0.19						
			10 ³ in.lb.s ²	-	-	0.23	0.19	0.19	0.19	0.18	0.17	0.17						
	B 11	J_1	kgcm ²	-	-	0.28	0.24	0.23	0.23	0.22	0.21	0.21						
			10 ³ in.lb.s ²	-	-	0.25	0.21	0.2	0.2	0.19	0.19	0.19						
	C 14	J_1	kgcm ²	0.58	0.47	0.35	0.31	0.3	0.3	0.3	0.29	0.28						
			10 ³ in.lb.s ²	0.51	0.42	0.31	0.27	0.27	0.27	0.27	0.26	0.25						
	D 16	J_1	kgcm ²	0.73	0.62	0.48	0.44	0.43	0.43	0.42	0.41	0.41						
			10 ³ in.lb.s ²	0.65	0.55	0.42	0.39	0.38	0.38	0.37	0.36	0.36						
	E 19	J_1	kgcm ²	0.81	0.71	0.56	0.52	0.51	0.52	0.51	0.5	0.5						
			10 ³ in.lb.s ²	0.72	0.63	0.5	0.46	0.45	0.46	0.45	0.44	0.43						
	G 24	J_1	kgcm ²	1.8	1.7	-	-	-	-	-	-	-						
			10 ³ in.lb.s ²	1.6	1.5	-	-	-	-	-	-	-						
	H 28	J_1	kgcm ²	1.6	1.4	-	-	-	-	-	-	-						
			10 ³ in.lb.s ²	1.4	1.2	-	-	-	-	-	-	-						

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter


^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub diameter





up to 28⁴⁾ (H)
clamping hub diameter

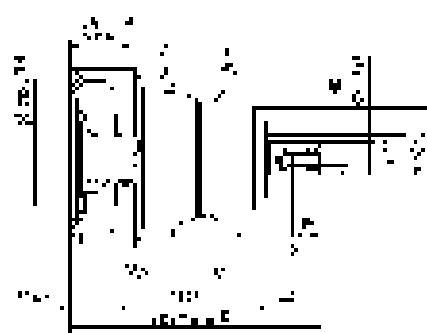



2-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub diameter

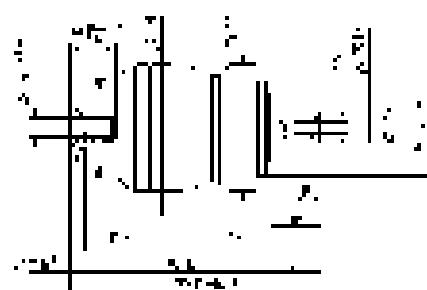



up to 19⁴⁾ (E)
clamping hub diameter



Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPL 035 MA 1-/2-stage

			1-stage		2-stage													
Ratio	i		3	4	9	12	15	16	20	28	30	40						
Max. torque ^{a) b) e)}	T_{2a}	Nm	480	480	480	480	480	480	480	480	432	480						
		in.lb	4248	4248	4248	4248	4248	4248	4248	4248	3824	4248						
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	305	305	305	305	300	305	305	305	270	305						
		in.lb	2699	2699	2699	2699	2655	2699	2699	2699	2390	2699						
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	500	500	500	500	500	500	500	500	500	500						
		in.lb	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425						
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2000	2200	2700	3300	3400	3300	3400	3600	3900	3900						
Max. input speed	n_{1Max}	rpm	6000	6000	7000	7000	7000	7000	7000	7000	7000	7000						
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	3.3	2.7	1.7	1.4	1.2	1.2	1.1	0.93	0.88	0.81						
		in.lb	29	24	15	12	11	11	9.7	8.2	7.8	7.2						
Max. backlash	j_i	arcmin	≤ 8		≤ 10													
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	30	30	30	30	30	30	30	30	30	30						
		in.lb/arcmin	266	266	266	266	266	266	266	266	266	266						
Max. axial force ^{c)}	F_{2AMax}	N	5650				5650											
		lb _f	1271				1271											
Max. lateral force ^{c)}	F_{2QMax}	N	6600				6600											
		lb _f	1485				1485											
Max. tilting moment	M_{2KMax}	Nm	487				487											
		in.lb	4310				4310											
Efficiency at full load	η	%	97				95											
Service life	L_h	h	> 20000				> 20000											
Weight (incl. standard adapter plate)	m	kg	9.1				9.5											
		lb _m	20				21											
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 65				≤ 61											
Max. permitted housing temperature		°C	+90				+90											
		°F	+194				+194											
Ambient temperature		°C	-15 to +40				-15 to +40											
		°F	+5 to +104				+5 to +104											
Lubrication			Lubricated for life															
Direction of rotation			In- and output same direction															
Protection class			IP 65															
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0150BA032.000-X															
		mm	X = 019.000 - 036.000															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C 14	J_1	kgcm ²	-	-	0.6	0.59	0.6	0.43	0.42	0.37	0.52	0.36					
			10 ³ in.lb.s ²	-	-	0.53	0.52	0.53	0.38	0.37	0.33	0.46	0.32					
	D 16	J_1	kgcm ²	-	-	0.75	0.74	0.74	0.58	0.57	0.5	0.67	0.51					
			10 ³ in.lb.s ²	-	-	0.66	0.65	0.65	0.51	0.5	0.44	0.59	0.45					
	E 19	J_1	kgcm ²	2.5	1.7	0.84	0.83	0.83	0.66	0.65	0.6	0.75	0.6					
			10 ³ in.lb.s ²	2.2	1.5	0.74	0.73	0.73	0.58	0.58	0.53	0.66	0.53					
	G 24	J_1	kgcm ²	3.3	2.4	1.9	1.9	1.9	1.7	1.7	1.6	1.8	1.6					
			10 ³ in.lb.s ²	2.9	2.1	1.7	1.6	1.7	1.5	1.5	1.5	1.6	1.4					
	H 28	J_1	kgcm ²	3	2.2	1.6	1.6	1.6	1.4	1.4	1.3	1.5	1.3					
			10 ³ in.lb.s ²	2.7	1.9	1.4	1.4	1.4	1.2	1.2	1.2	1.3	1.2					
	I 32	J_1	kgcm ²	7.1	6.2	-	-	-	-	-	-	-	-					
			10 ³ in.lb.s ²	6.3	5.5	-	-	-	-	-	-	-	-					
	K 38	J_1	kgcm ²	8.3	7.4	-	-	-	-	-	-	-	-					
			10 ³ in.lb.s ²	7.3	6.5	-	-	-	-	-	-	-	-					

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter



^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 24/28⁴⁾
(G<sup>5)/H)
clamping hub
diameter</sup>

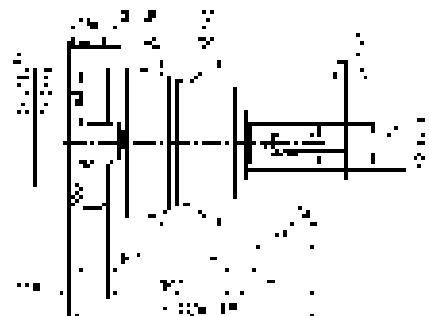



up to 38⁴⁾ (K)
clamping hub
diameter


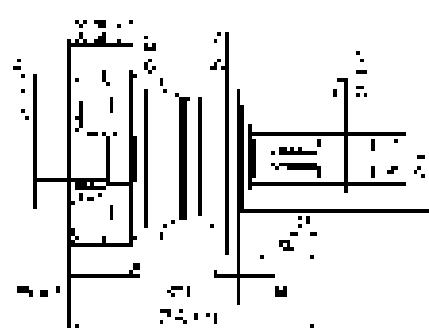



2-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter



up to 28⁴⁾ (H)
clamping hub
diameter

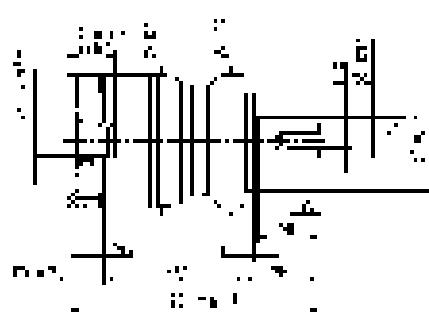

Motor shaft diameter [mm]

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPS 015 MF 1-stage

			1-stage							
Ratio	i		3	4	5	7	8	10		
Max. torque ^{a) b) e)}	T_{2a}	Nm	51	56	64	64	56	56		
		in.lb	451	496	566	566	496	496		
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	32	35	40	40	35	35		
		in.lb	283	310	354	354	310	310		
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	80	80	80	80	80	80		
		in.lb	708	708	708	708	708	708		
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2900	3100	3300	3600	3600	3800		
Max. input speed	n_{1Max}	rpm	8000	8000	8000	8000	8000	8000		
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	0.92	0.74	0.62	0.51	0.47	0.41		
		in.lb	8.1	6.5	5.5	4.5	4.2	3.6		
Max. backlash	j_t	arcmin				≤ 8				
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	3.3	3.3	3.3	3.3	2.8	2.8		
		in.lb/arcmin	29	29	29	29	25	25		
Max. axial force ^{c)}	F_{2AMax}	N			2400					
		lb _f			540					
Max. lateral force ^{c)}	F_{2QMax}	N			2800					
		lb _f			630					
Max. tilting moment	M_{2KMax}	Nm			152					
		in.lb			1345					
Efficiency at full load	η	%			97					
Service life	L_h	h			> 20000					
Weight (incl. standard adapter plate)	m	kg			1.8					
		lb _m			4					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)			≤ 59					
Max. permitted housing temperature		°C			+90					
		°F			+194					
Ambient temperature		°C			-15 to +40					
		°F			+5 to +104					
Lubrication					Lubricated for life					
Direction of rotation					In- and output same direction					
Protection class					IP 65					
Elastomer coupling (recommended product type – validate sizing with cymex®)					ELC-0060BA016.000-X					
		mm			X = 012.000 - 032.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A	9	J_1	kgcm ²	0.25	0.19	0.17	0.14	0.14	0.13
				10 ³ in.lb.s ²	0.22	0.17	0.15	0.12	0.12	0.12
	B	11	J_1	kgcm ²	0.26	0.21	0.18	0.16	0.16	0.15
				10 ³ in.lb.s ²	0.23	0.19	0.16	0.14	0.14	0.13
	C	14	J_1	kgcm ²	0.34	0.28	0.26	0.24	0.23	0.23
				10 ³ in.lb.s ²	0.3	0.25	0.23	0.21	0.2	0.2
	D	16	J_1	kgcm ²	0.47	0.41	0.39	0.36	0.36	0.35
				10 ³ in.lb.s ²	0.42	0.36	0.35	0.32	0.32	0.31
	E	19	J_1	kgcm ²	0.55	0.49	0.47	0.45	0.44	0.44
				10 ³ in.lb.s ²	0.49	0.43	0.42	0.4	0.39	0.39

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange




^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft




1-stage

Motor shaft diameter [mm]

up to 14⁴⁾ (C)⁵⁾
clamping hub diameter

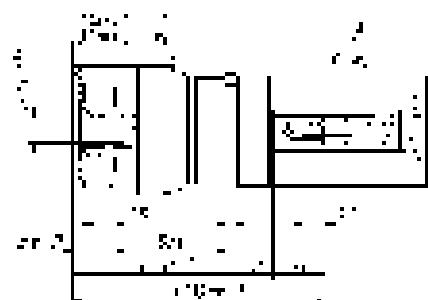

up to 19⁴⁾ (E)
clamping hub diameter

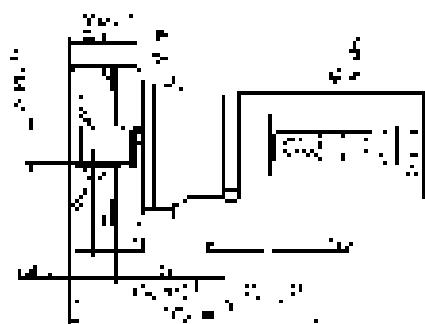


Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)

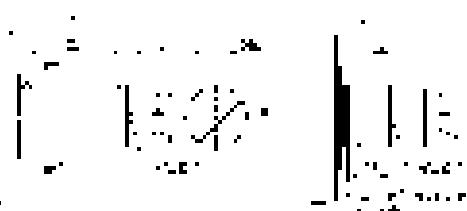

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPS 015 MF 2-stage

			2-stage															
Ratio	i		12	15	16	20	25	28	30	32	35	40	50	64	70	100		
Max. torque ^{a) b) e)}	T_{2a}	Nm	51	51	56	56	64	56	51	56	64	56	64	56	64	56	56	
		in.lb	451	451	496	496	566	496	451	496	566	496	566	496	566	496	496	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	32	32	35	35	40	35	32	35	40	35	40	35	40	35	35	
		in.lb	283	283	310	310	354	310	283	310	354	310	354	310	354	310	354	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	
		in.lb	708	708	708	708	708	708	708	708	708	708	708	708	708	708	708	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)		n_{1N}	rpm	3800	4000	3800	4000	4000	4300	4600	4400	4300	4600	4600	4400	4600	4600	
Max. input speed		n_{1Max}	rpm	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	0.34	0.29	0.29	0.25	0.23	0.21	0.21	0.2	0.2	0.19	0.17	0.17	0.16	0.15	0.15	
		in.lb	3	2.6	2.6	2.2	2	1.9	1.9	1.8	1.8	1.7	1.5	1.5	1.4	1.3	1.3	
Max. backlash	j_t	arcmin	≤ 10															
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	2.8	3.3	2.8	
		in.lb/arcmin	29	29	29	29	29	29	29	29	29	29	29	29	25	29	25	
Max. axial force ^{c)}	F_{2AMax}	N	2400															
		lb _f	540															
Max. lateral force ^{c)}	F_{2QMax}	N	2800															
		lb _f	630															
Max. tilting moment	M_{2KMax}	Nm	152															
		in.lb	1345															
Efficiency at full load	η	%	95															
Service life	L_h	h	> 20000															
Weight (incl. standard adapter plate)	m	kg	1.9															
		lb _m	4.2															
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 58															
Max. permitted housing temperature		°C	+90															
		°F	+194															
Ambient temperature		°C	-15 to +40															
		°F	+5 to +104															
Lubrication			Lubricated for life															
Direction of rotation			In- and output same direction															
Protection class			IP 65															
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA016.000-X															
Bore diameter of coupling on the application side		mm	X = 012.000 - 032.000															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z	8	J_t	kgcm ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	
				10 ⁻³ in.lb.s ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	
	A	9	J_t	kgcm ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	
				10 ⁻³ in.lb.s ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	
	B	11	J_t	kgcm ²	0.06	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.05	0.04	0.04	0.04	
				10 ⁻³ in.lb.s ²	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	
	C	14	J_t	kgcm ²	0.14	0.14	0.14	0.13	0.13	0.13	0.14	0.13	0.13	0.13	0.13	0.13	0.13	
				10 ⁻³ in.lb.s ²	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange


^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft






2-stage

Motor shaft diameter [mm]

up to 11⁴⁾ (B)⁵⁾
clamping hub diameter



up to 14⁴⁾ (C)
clamping hub diameter

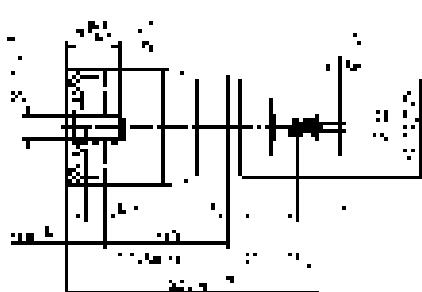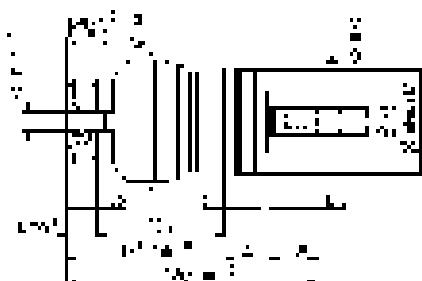


Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)

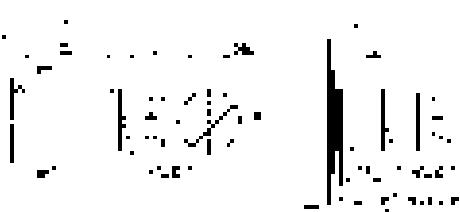

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPS 025 MF 1-stage

			1-stage							
Ratio	i		3	4	5	7	8	10		
Max. torque ^{a) b) e)}	T_{2a}	Nm	128	152	160	160	144	144		
		in.lb	1133	1345	1416	1416	1275	1275		
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	80	95	100	100	90	90		
		in.lb	708	841	885	885	797	797		
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	190	190	190	190	190	190		
		in.lb	1682	1682	1682	1682	1682	1682		
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2700	2900	3000	3200	3300	3500		
Max. input speed	n_{1Max}	rpm	7000	7000	7000	7000	7000	7000		
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	1.8	1.5	1.3	1.1	1	0.94		
		in.lb	16	13	12	9.7	8.9	8.3		
Max. backlash	j_t	arcmin				≤ 8				
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	9.5	9.5	9.5	9.5	8.5	8.5		
		in.lb/arcmin	84	84	84	84	75	75		
Max. axial force ^{c)}	F_{2AMax}	N			3350					
		lb _f			754					
Max. lateral force ^{c)}	F_{2QMax}	N			4200					
		lb _f			945					
Max. tilting moment	M_{2KMax}	Nm			236					
		in.lb			2089					
Efficiency at full load	η	%			97					
Service life	L_h	h			> 20000					
Weight (incl. standard adapter plate)	m	kg			3.6					
		lb _m			8					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)			≤ 61					
Max. permitted housing temperature		°C			+90					
		°F			+194					
Ambient temperature		°C			-15 to +40					
		°F			+5 to +104					
Lubrication					Lubricated for life					
Direction of rotation					In- and output same direction					
Protection class					IP 65					
Elastomer coupling (recommended product type – validate sizing with cymex®)					ELC-0060BA022.000-X					
		mm			X = 012.000 - 032.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	kgcm ²	0.58	0.47	0.38	0.3	0.28	0.26
				10 ⁻³ in.lb.s ²	0.51	0.42	0.34	0.27	0.25	0.23
	D	16	J_1	kgcm ²	0.73	0.62	0.53	0.43	0.42	0.4
				10 ⁻³ in.lb.s ²	0.65	0.55	0.47	0.38	0.37	0.35
	E	19	J_1	kgcm ²	0.81	0.71	0.61	0.53	0.51	0.49
				10 ⁻³ in.lb.s ²	0.72	0.63	0.54	0.47	0.45	0.43
	G	24	J_1	kgcm ²	1.8	1.7	1.6	1.6	1.5	1.5
				10 ⁻³ in.lb.s ²	1.6	1.5	1.4	1.4	1.3	1.3
	H	28	J_1	kgcm ²	1.6	1.4	1.4	1.3	1.3	1.2
				10 ⁻³ in.lb.s ²	1.4	1.2	1.2	1.2	1.2	1.1

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft






1-stage

Motor shaft diameter [mm]

up to 19⁴⁾ (E)⁵⁾
clamping hub diameter




up to 28⁴⁾ (H)
clamping hub diameter

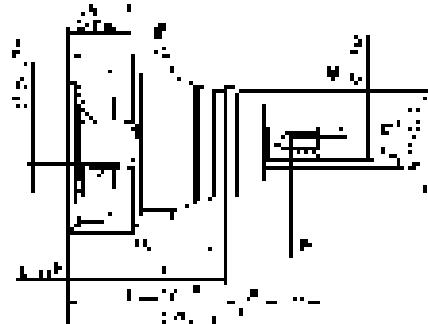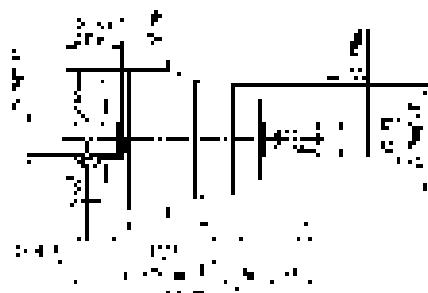


Planetary Gearboxes
Value Line

Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPS 025 MF 2-stage

			2-stage															
Ratio	i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100	
Max. torque ^{a) b) e)}	T_{2a}	Nm	128	128	128	152	152	160	152	128	144	160	152	160	144	160	144	
		in.lb	1133	1133	1133	1345	1345	1416	1345	1133	1275	1416	1345	1416	1275	1416	1275	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	80	80	80	95	95	100	95	80	90	100	95	100	90	100	90	
		in.lb	708	708	708	841	841	885	841	708	797	885	841	885	797	885	797	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	190	190	190	190	190	190	190	190	190	190	190	190	190	190	190	
		in.lb	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2900	3500	3700	3500	3700	3700	4000	4300	4100	4000	4300	4300	4100	4300	4300	
Max. input speed	n_{1Max}	rpm	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.67	0.55	0.47	0.46	0.4	0.36	0.34	0.33	0.32	0.31	0.29	0.27	0.25	0.25	0.23	
		in.lb	5.9	4.9	4.2	4.1	3.5	3.2	3	2.9	2.8	2.7	2.6	2.4	2.2	2.2	2	
Max. backlash	j_t	arcmin	≤ 10															
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	10	10	10	10	10	9.5	10	10	10	9.5	10	9.5	8.5	9.5	8.5	
		in.lb/arcmin	89	89	89	89	89	84	89	89	89	84	89	84	75	84	75	
Max. axial force ^{c)}	F_{2AMax}	N	3350															
		lb _f	754															
Max. lateral force ^{c)}	F_{2QMax}	N	4200															
		lb _f	945															
Max. tilting moment	M_{2KMax}	Nm	236															
		in.lb	2089															
Efficiency at full load	η	%	95															
Service life	L_h	h	> 20000															
Weight (incl. standard adapter plate)	m	kg	3.9															
		lb _m	8.6															
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 59															
Max. permitted housing temperature		°C	+90															
		°F	+194															
Ambient temperature		°C	-15 to +40															
		°F	+5 to +104															
Lubrication			Lubricated for life															
Direction of rotation			In- and output same direction															
Protection class			IP 65															
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA022.000-X															
		mm	X = 012.000 - 032.000															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A 9	J_1	kgcm ²	0.26	0.22	0.21	0.21	0.2	0.2	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	
			10 ³ in.lb.s ²	0.23	0.19	0.19	0.19	0.18	0.18	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	
	B 11	J_1	kgcm ²	0.28	0.24	0.23	0.23	0.22	0.22	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21
			10 ³ in.lb.s ²	0.25	0.21	0.2	0.2	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	
	C 14	J_1	kgcm ²	0.35	0.31	0.3	0.3	0.3	0.29	0.29	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28
			10 ³ in.lb.s ²	0.31	0.27	0.27	0.27	0.27	0.26	0.26	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
	D 16	J_1	kgcm ²	0.48	0.44	0.43	0.43	0.42	0.42	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41
			10 ³ in.lb.s ²	0.42	0.39	0.38	0.38	0.37	0.37	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36
	E 19	J_1	kgcm ²	0.56	0.52	0.51	0.52	0.51	0.5	0.5	0.5	0.5	0.5	0.49	0.49	0.49	0.49	0.49
			10 ³ in.lb.s ²	0.5	0.46	0.45	0.46	0.45	0.44	0.44	0.44	0.44	0.44	0.43	0.43	0.43	0.43	0.43

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange


^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft





2-stage

Motor shaft diameter [mm]

up to 14⁴⁾ (C)⁵⁾
clamping hub diameter



up to 19⁴⁾ (E)
clamping hub diameter

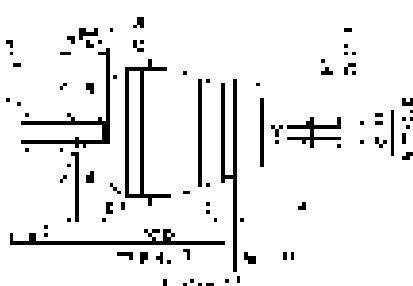



Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPS 035 MF 1-stage

			1-stage						
Ratio	i		3	4	5	7	8	10	
Max. torque ^{a) b) e)}	T_{2a}	Nm	320	408	400	400	352	352	
		in.lb	2832	3611	3540	3540	3115	3115	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	200	255	250	250	220	220	
		in.lb	1770	2257	2213	2213	1947	1947	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	500	500	500	500	500	500	
		in.lb	4425	4425	4425	4425	4425	4425	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2000	2200	2300	2500	2600	2700	
Max. input speed	n_{1Max}	rpm	6000	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	3.3	2.7	2.3	1.9	1.7	1.5	
		in.lb	29	24	20	17	15	13	
Max. backlash	j_t	arcmin				≤ 8			
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	25	25	25	25	22	22	
		in.lb/arcmin	221	221	221	221	195	195	
Max. axial force ^{c)}	F_{2AMax}	N			5650				
		lb _f			1271				
Max. lateral force ^{c)}	F_{2QMax}	N			6600				
		lb _f			1485				
Max. tilting moment	M_{2KMax}	Nm			487				
		in.lb			4310				
Efficiency at full load	η	%			97				
Service life	L_h	h			> 20000				
Weight (incl. standard adapter plate)	m	kg			8.4				
		lb _m			19				
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)			≤ 65				
Max. permitted housing temperature		°C			+90				
		°F			+194				
Ambient temperature		°C			-15 to +40				
		°F			+5 to +104				
Lubrication					Lubricated for life				
Direction of rotation					In- and output same direction				
Protection class					IP 65				
Elastomer coupling (recommended product type – validate sizing with cymex®)					ELC-0150BA032.000-X				
					X = 019.000 - 036.000				
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_1	kgcm ²	2.5	1.7	1.3	1	0.94	0.87
			10 ³ in.lb.s ²	2.2	1.5	1.2	0.89	0.83	0.77
	G 24	J_1	kgcm ²	3.3	2.4	2.1	1.8	1.7	1.6
			10 ³ in.lb.s ²	2.9	2.1	1.9	1.6	1.5	1.4
	H 28	J_1	kgcm ²	3	2.2	1.8	1.5	1.4	1.4
			10 ³ in.lb.s ²	2.7	1.9	1.6	1.3	1.2	1.2
	I 32	J_1	kgcm ²	7.1	6.2	5.9	5.6	5.5	5.4
			10 ³ in.lb.s ²	6.3	5.5	5.2	5	4.9	4.8
	K 38	J_1	kgcm ²	8.3	7.4	7.1	6.7	6.6	6.6
			10 ³ in.lb.s ²	7.3	6.5	6.3	5.9	5.8	5.8

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft

1-stage




up to 24/28⁴⁾
(G^{5)/H)}

clamping hub diameter



1-stage

up to 38⁴⁾ (K)
clamping hub diameter

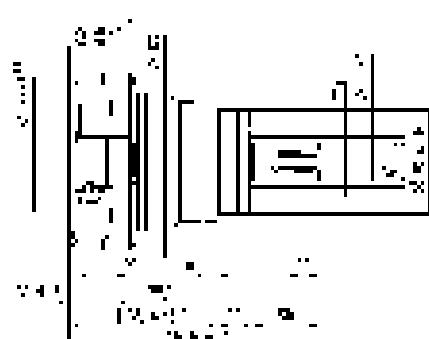


Motor shaft diameter [mm]


Planetary Gearboxes
Value Line

Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPS 035 MF 2-stage

			2-stage															
Ratio	i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100	
Max. torque ^{a) b) e)}	T_{2a}	Nm	320	320	320	408	408	400	408	320	408	400	408	400	352	400	352	
		in.lb	2832	2832	2832	3611	3611	3540	3611	2832	3611	3540	3611	3540	3115	3540	3115	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	200	200	200	255	255	250	255	200	255	250	255	250	220	250	220	
		in.lb	1770	1770	1770	2257	2257	2213	2257	1770	2257	2213	2257	2213	1947	2213	1947	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	
		in.lb	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2700	3300	3400	3300	3400	3400	3600	3900	3700	3600	3900	3900	3700	3900	3900	
Max. input speed	n_{1Max}	rpm	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	1.7	1.4	1.2	1.2	1.1	1	0.93	0.88	0.88	0.87	0.81	0.77	0.75	0.72	0.68	
		in.lb	15	12	11	11	9.7	8.9	8.2	7.8	7.8	7.7	7.2	6.8	6.6	6.4	6	
Max. backlash	j_t	arcmin	≤ 10															
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	25	25	25	25	25	25	25	25	25	25	25	25	25	22	25	22
		in.lb/arcmin	221	221	221	221	221	221	221	221	221	221	221	221	221	195	221	195
Max. axial force ^{c)}	F_{2AMax}	N	5650															
		lb _f	1271															
Max. lateral force ^{c)}	F_{2QMax}	N	6600															
		lb _f	1485															
Max. tilting moment	M_{2KMax}	Nm	487															
		in.lb	4310															
Efficiency at full load	η	%	95															
Service life	L_h	h	> 20000															
Weight (incl. standard adapter plate)	m	kg	8.8															
		lb _m	19															
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 61															
Max. permitted housing temperature		°C	+90															
		°F	+194															
Ambient temperature		°C	-15 to +40															
		°F	+5 to +104															
Lubrication			Lubricated for life															
Direction of rotation			In- and output same direction															
Protection class			IP 65															
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0150BA032.000-X															
		mm	X = 019.000 - 036.000															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C 14	J_1	kgcm ²	0.6	0.59	0.6	0.43	0.42	0.36	0.37	0.52	0.38	0.32	0.36	0.31	0.26	0.27	0.24
			10 ³ in.lb.s ²	0.53	0.52	0.53	0.38	0.37	0.32	0.33	0.46	0.34	0.28	0.32	0.27	0.23	0.24	0.21
	D 16	J_1	kgcm ²	0.75	0.74	0.74	0.58	0.57	0.5	0.5	0.67	0.52	0.45	0.51	0.46	0.4	0.41	0.39
			10 ³ in.lb.s ²	0.66	0.65	0.65	0.51	0.5	0.44	0.44	0.59	0.46	0.4	0.45	0.41	0.35	0.36	0.35
	E 19	J_1	kgcm ²	0.84	0.83	0.83	0.66	0.65	0.59	0.6	0.75	0.61	0.55	0.6	0.54	0.49	0.5	0.48
			10 ³ in.lb.s ²	0.74	0.73	0.73	0.58	0.58	0.52	0.53	0.66	0.54	0.49	0.53	0.48	0.43	0.44	0.42
	G 24	J_1	kgcm ²	1.9	1.9	1.9	1.7	1.7	1.6	1.6	1.8	1.6	1.6	1.6	1.6	1.5	1.5	1.5
			10 ³ in.lb.s ²	1.7	1.6	1.7	1.5	1.5	1.4	1.5	1.6	1.5	1.4	1.4	1.4	1.3	1.4	1.3
	H 28	J_1	kgcm ²	1.6	1.6	1.6	1.4	1.4	1.3	1.3	1.5	1.4	1.3	1.3	1.3	1.2	1.2	1.2
			10 ³ in.lb.s ²	1.4	1.4	1.4	1.2	1.2	1.2	1.3	1.2	1.1	1.2	1.1	1.1	1.1	1.1	1.1

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange


^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft





2-stage

Motor shaft diameter [mm]

up to 19⁴⁾ (E)⁵⁾
clamping hub diameter



up to 28⁴⁾ (H)
clamping hub diameter

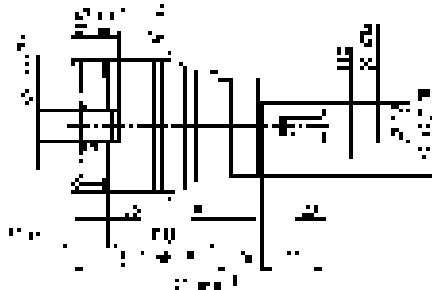


Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)

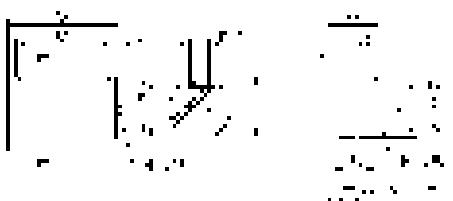

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPS 045 MF 1-/2-stage

			1-stage				2-stage									
Ratio	i		5	8	10	25	32	50	64	100						
Max. torque ^{a) b) e)}	T_{2a}	Nm	800	640	640	700	640	700	640	640						
		in.lb	7081	5665	5665	6196	5665	6196	5665	5665						
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	500	400	400	500	400	500	400	400						
		in.lb	4425	3540	3540	4425	3540	4425	3540	3540						
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	1000	1000	1000	1000	1000	1000	1000	1000						
		in.lb	8851	8851	8851	8851	8851	8851	8851	8851						
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	1800	1900	2000	2600	2500	3000	2900	3000						
Max. input speed	n_{1Max}	rpm	4000	4000	4000	6000	6000	6000	6000	6000						
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	4.2	3	2.6	1.6	1.5	1.2	1.1	0.97						
		in.lb	37	27	23	14	13	11	9.7	8.6						
Max. backlash	j_t	arcmin	≤ 8				≤ 10									
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	55	44	44	55	44	55	44	44						
		in.lb/arcmin	487	389	389	487	389	487	389	389						
Max. axial force ^{c)}	F_{2AMax}	N	9870				9870									
		lb _f	2221				2221									
Max. lateral force ^{c)}	F_{2QMax}	N	9900				9900									
		lb _f	2228				2228									
Max. tilting moment	M_{2KMax}	Nm	952				952									
		in.lb	8426				8426									
Efficiency at full load	η	%	97				95									
Service life	L_h	h	> 20000				> 20000									
Weight (incl. standard adapter plate)	m	kg	19				19									
		lb _m	42				42									
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 68				≤ 65									
Max. permitted housing temperature		°C	+90				+90									
		°F	+194				+194									
Ambient temperature		°C	-15 to +40				-15 to +40									
		°F	+5 to +104				+5 to +104									
Lubrication			Lubricated for life													
Direction of rotation			In- and output same direction													
Protection class			IP 65													
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0300BA040.000-X													
		mm	X = 020.000 - 045.000													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_1	kgcm ²	-	-	-	1.2	1.1	1	0.88	0.82					
			10 ³ in.lb.s ²	-	-	-	1.1	0.97	0.89	0.78	0.73					
	G 24	J_1	kgcm ²	-	-	-	2	1.9	1.8	1.7	1.6					
			10 ³ in.lb.s ²	-	-	-	1.8	1.7	1.6	1.5	1.4					
	H 28	J_1	kgcm ²	-	-	-	1.7	1.6	1.5	1.4	1.3					
			10 ³ in.lb.s ²	-	-	-	1.5	1.4	1.3	1.2	1.2					
	I 32	J_1	kgcm ²	-	-	-	5.8	5.7	5.6	5.4	5.4					
			10 ³ in.lb.s ²	-	-	-	5.1	5	5	4.8	4.8					
	K 38	J_1	kgcm ²	8.7	7.3	7.2	7	6.9	6.8	6.6	6.5					
			10 ³ in.lb.s ²	7.7	6.5	6.4	6.2	6.1	6	5.8	5.8					

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter



^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft




1-stage

up to 38⁴⁾ (K)⁵⁾
clamping hub diameter






2-stage

up to 28⁴⁾ (H)⁵⁾
clamping hub diameter

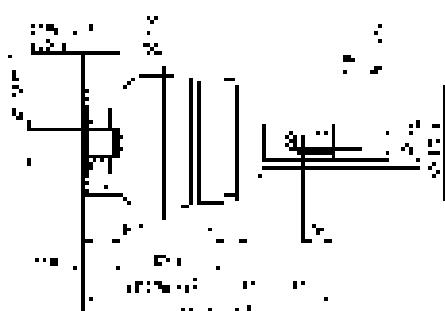


up to 38⁴⁾ (K)
clamping hub diameter

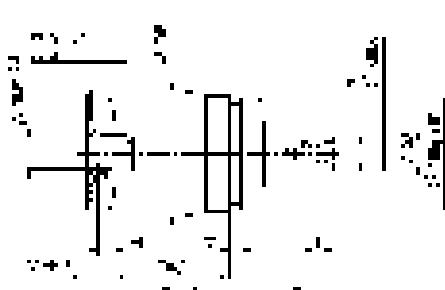


Motor shaft diameter [mm]

Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPS 015 MA 1-/2-stage

			1-stage		2-stage							
Ratio	i		3	4	12	15	16	20	28	30	40	
Max. torque ^{a) b) e)}	T_{2a}	Nm	80	67	62	67	67	67	67	62	67	
		in.lb	708	593	549	593	593	593	593	549	593	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	55	42	39	42	42	42	42	39	42	
		in.lb	487	372	345	372	372	372	372	345	372	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	80	80	80	80	80	80	80	80	80	
		in.lb	708	708	708	708	708	708	708	708	708	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2900	3100	3800	4000	3800	4000	4300	4600	4600	
Max. input speed	n_{1Max}	rpm	8000	8000	10000	10000	10000	10000	10000	10000	10000	
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.92	0.74	0.34	0.29	0.29	0.25	0.21	0.21	0.19	
		in.lb	8.1	6.5	3	2.6	2.6	2.2	1.9	1.9	1.7	
Max. backlash	j_t	arcmin	≤ 8		≤ 10							
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	4	4	4	4	4	4	4	4	4	
		in.lb/arcmin	35	35	35	35	35	35	35	35	35	
Max. axial force ^{c)}	F_{2AMax}	N	2400						2400			
		lb _f	540						540			
Max. lateral force ^{c)}	F_{2QMax}	N	2800						2800			
		lb _f	630						630			
Max. tilting moment	M_{2KMax}	Nm	152						152			
		in.lb	1345						1345			
Efficiency at full load	η	%	97						95			
Service life	L_h	h	> 20000						> 20000			
Weight (incl. standard adapter plate)	m	kg	1.8						1.9			
		lb _m	4						4.2			
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 59						≤ 58			
Max. permitted housing temperature		°C	+90						+90			
		°F	+194						+194			
Ambient temperature		°C	-15 to +40						-15 to +40			
		°F	+5 to +104						+5 to +104			
Lubrication			Lubricated for life									
Direction of rotation			In- and output same direction									
Protection class			IP 65									
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA016.000-X									
		mm	X = 012.000 - 032.000									
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z 8	J_1	kgcm ²	-	-	0.04	0.04	0.03	0.03	0.03	0.03	
			10 ⁻³ in.lb.s ²	-	-	0.04	0.04	0.03	0.03	0.03	0.03	
	A 9	J_1	kgcm ²	0.25	0.19	0.04	0.04	0.03	0.03	0.03	0.03	
			10 ⁻³ in.lb.s ²	0.22	0.17	0.04	0.04	0.03	0.03	0.03	0.03	
	B 11	J_1	kgcm ²	0.26	0.21	0.06	0.06	0.05	0.05	0.05	0.05	
			10 ⁻³ in.lb.s ²	0.23	0.19	0.05	0.05	0.04	0.04	0.04	0.04	
	C 14	J_1	kgcm ²	0.34	0.28	0.14	0.14	0.14	0.13	0.13	0.14	
			10 ⁻³ in.lb.s ²	0.3	0.25	0.12	0.12	0.12	0.12	0.12	0.12	
	D 16	J_1	kgcm ²	0.47	0.41	-	-	-	-	-	-	
			10 ⁻³ in.lb.s ²	0.42	0.36	-	-	-	-	-	-	
	E 19	J_1	kgcm ²	0.55	0.49	-	-	-	-	-	-	
			10 ⁻³ in.lb.s ²	0.49	0.43	-	-	-	-	-	-	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

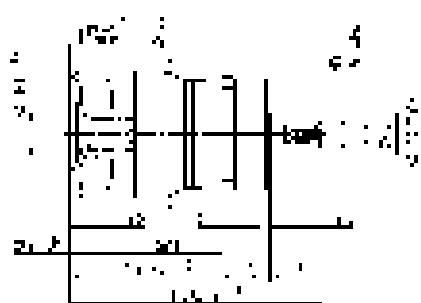


up to 19⁴⁾ (E)
clamping hub
diameter


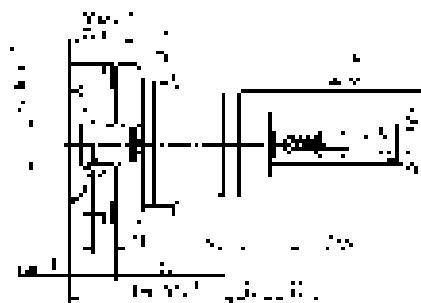



2-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter



up to 14⁴⁾ (C)
clamping hub
diameter

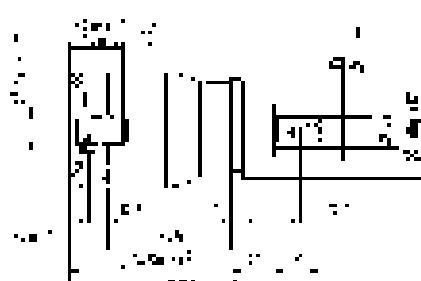


Motor shaft diameter [mm]

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPS 025 MA 1-/2-stage

			1-stage		2-stage																
Ratio	i		3	4	9	12	15	16	20	28	30	40									
Max. torque ^{a) b) e)}	T_{2a}	Nm	185	185	185	185	185	185	185	185	168	185									
		in.lb	1637	1637	1637	1637	1637	1637	1637	1637	1487	1637									
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	125	115	125	125	120	115	115	115	105	115									
		in.lb	1106	1018	1106	1106	1062	1018	1018	1018	929	1018									
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	190	190	190	190	190	190	190	190	190	190									
		in.lb	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682									
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2700	2900	2900	3500	3700	3500	3700	4000	4300	4300									
Max. input speed	n_{1Max}	rpm	7000	7000	8000	8000	8000	8000	8000	8000	8000	8000									
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	1.8	1.5	0.67	0.55	0.47	0.46	0.4	0.34	0.33	0.29									
		in.lb	16	13	5.9	4.9	4.2	4.1	3.5	3	2.9	2.6									
Max. backlash	j_t	arcmin	≤ 8		≤ 10																
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	12	12	12	12	12	12	12	12	12	12									
		in.lb/arcmin	106	106	106	106	106	106	106	106	106	106									
Max. axial force ^{c)}	F_{2AMax}	N	3350			3350															
		lb _f	754			754															
Max. lateral force ^{c)}	F_{2QMax}	N	4200			4200															
		lb _f	945			945															
Max. tilting moment	M_{2KMax}	Nm	236			236															
		in.lb	2089			2089															
Efficiency at full load	η	%	97			95															
Service life	L_h	h	> 20000			> 20000															
Weight (incl. standard adapter plate)	m	kg	3.6			3.9															
		lb _m	8			8.6															
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 61			≤ 59															
Max. permitted housing temperature		°C	+90			+90															
		°F	+194			+194															
Ambient temperature		°C	-15 to +40			-15 to +40															
		°F	+5 to +104			+5 to +104															
Lubrication			Lubricated for life																		
Direction of rotation			In- and output same direction																		
Protection class			IP 65																		
Elastomer coupling (recommended product type – validate sizing with cymex®)		ELC-0060BA022.000-X																			
		X = 012.000 - 032.000																			
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A 9	J_1	kgcm ²	-	-	0.26	0.22	0.21	0.21	0.2	0.19	0.19									
			10 ³ in.lb.s ²	-	-	0.23	0.19	0.19	0.19	0.18	0.17	0.17									
	B 11	J_1	kgcm ²	-	-	0.28	0.24	0.23	0.23	0.22	0.21	0.21									
			10 ³ in.lb.s ²	-	-	0.25	0.21	0.2	0.2	0.19	0.19	0.19									
	C 14	J_1	kgcm ²	0.58	0.47	0.35	0.31	0.3	0.3	0.3	0.29	0.28									
			10 ³ in.lb.s ²	0.51	0.42	0.31	0.27	0.27	0.27	0.27	0.26	0.25									
	D 16	J_1	kgcm ²	0.73	0.62	0.48	0.44	0.43	0.43	0.42	0.41	0.41									
			10 ³ in.lb.s ²	0.65	0.55	0.42	0.39	0.38	0.38	0.37	0.36	0.36									
	E 19	J_1	kgcm ²	0.81	0.71	0.56	0.52	0.51	0.52	0.51	0.5	0.5									
			10 ³ in.lb.s ²	0.72	0.63	0.5	0.46	0.45	0.46	0.45	0.44	0.43									
	G 24	J_1	kgcm ²	1.8	1.7	-	-	-	-	-	-	-									
			10 ³ in.lb.s ²	1.6	1.5	-	-	-	-	-	-	-									
	H 28	J_1	kgcm ²	1.6	1.4	-	-	-	-	-	-	-									
			10 ³ in.lb.s ²	1.4	1.2	-	-	-	-	-	-	-									

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter


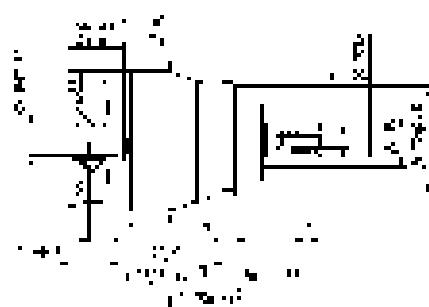



up to 28⁴⁾ (H)
clamping hub
diameter


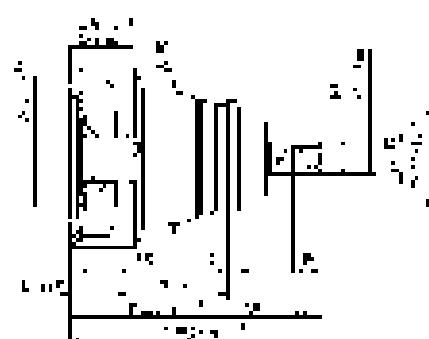



2-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

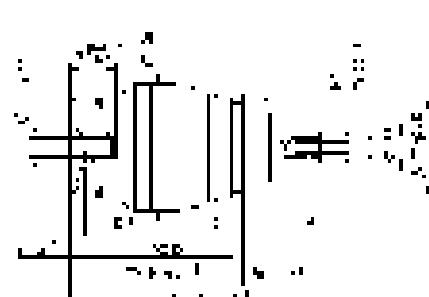

up to 19⁴⁾ (E)
clamping hub
diameter

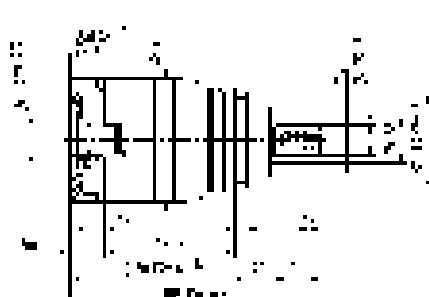



Motor shaft diameter [mm]

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPS 035 MA 1-/2-stage

			1-stage		2-stage													
Ratio	i		3	4	9	12	15	16	20	28	30	40						
Max. torque ^{a) b) e)}	T_{2a}	Nm	480	480	480	480	480	480	480	480	432	480						
		in.lb	4248	4248	4248	4248	4248	4248	4248	4248	3824	4248						
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	305	305	305	305	300	305	305	305	270	305						
		in.lb	2699	2699	2699	2699	2655	2699	2699	2699	2390	2699						
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	500	500	500	500	500	500	500	500	500	500						
		in.lb	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425						
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2000	2200	2700	3300	3400	3300	3400	3600	3900	3900						
Max. input speed	n_{1Max}	rpm	6000	6000	7000	7000	7000	7000	7000	7000	7000	7000						
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	3.3	2.7	1.7	1.4	1.2	1.2	1.1	0.93	0.88	0.81						
		in.lb	29	24	15	12	11	11	9.7	8.2	7.8	7.2						
Max. backlash	j_i	arcmin	≤ 8		≤ 10													
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	30	30	30	30	30	30	30	30	30	30						
		in.lb/arcmin	266	266	266	266	266	266	266	266	266	266						
Max. axial force ^{c)}	F_{2AMax}	N	5650				5650											
		lb _f	1271				1271											
Max. lateral force ^{c)}	F_{2QMax}	N	6600				6600											
		lb _f	1485				1485											
Max. tilting moment	M_{2KMax}	Nm	487				487											
		in.lb	4310				4310											
Efficiency at full load	η	%	97				95											
Service life	L_h	h	> 20000				> 20000											
Weight (incl. standard adapter plate)	m	kg	8.4				8.8											
		lb _m	19				19											
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 65				≤ 61											
Max. permitted housing temperature		°C	+90				+90											
		°F	+194				+194											
Ambient temperature		°C	-15 to +40				-15 to +40											
		°F	+5 to +104				+5 to +104											
Lubrication			Lubricated for life															
Direction of rotation			In- and output same direction															
Protection class			IP 65															
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0150BA032.000-X															
		mm	X = 019.000 - 036.000															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C 14	J_1	kgcm ²	-	-	0.6	0.59	0.6	0.43	0.42	0.37	0.52	0.36					
			10 ³ in.lb.s ²	-	-	0.53	0.52	0.53	0.38	0.37	0.33	0.46	0.32					
	D 16	J_1	kgcm ²	-	-	0.75	0.74	0.74	0.58	0.57	0.5	0.67	0.51					
			10 ³ in.lb.s ²	-	-	0.66	0.65	0.65	0.51	0.5	0.44	0.59	0.45					
	E 19	J_1	kgcm ²	2.5	1.7	0.84	0.83	0.83	0.66	0.65	0.6	0.75	0.6					
			10 ³ in.lb.s ²	2.2	1.5	0.74	0.73	0.73	0.58	0.58	0.53	0.66	0.53					
	G 24	J_1	kgcm ²	3.3	2.4	1.9	1.9	1.9	1.7	1.7	1.6	1.8	1.6					
			10 ³ in.lb.s ²	2.9	2.1	1.7	1.6	1.7	1.5	1.5	1.5	1.6	1.4					
	H 28	J_1	kgcm ²	3	2.2	1.6	1.6	1.6	1.4	1.4	1.3	1.5	1.3					
			10 ³ in.lb.s ²	2.7	1.9	1.4	1.4	1.4	1.2	1.2	1.2	1.3	1.2					
	I 32	J_1	kgcm ²	7.1	6.2	-	-	-	-	-	-	-	-					
			10 ³ in.lb.s ²	6.3	5.5	-	-	-	-	-	-	-	-					
	K 38	J_1	kgcm ²	8.3	7.4	-	-	-	-	-	-	-	-					
			10 ³ in.lb.s ²	7.3	6.5	-	-	-	-	-	-	-	-					

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures



^{e)} Valid for: Smooth shaft

1-stage

up to 24/28⁴⁾
(G<sup>5)/H)
clamping hub
diameter</sup>


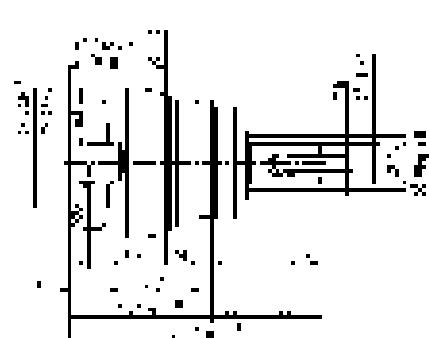



up to 38⁴⁾ (K)
clamping hub
diameter






2-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

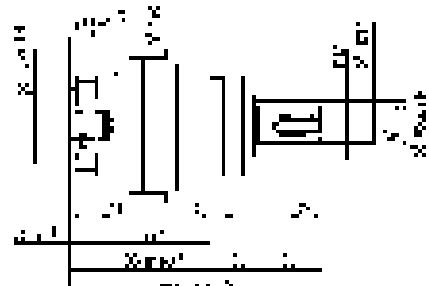

up to 28⁴⁾ (H)
clamping hub
diameter

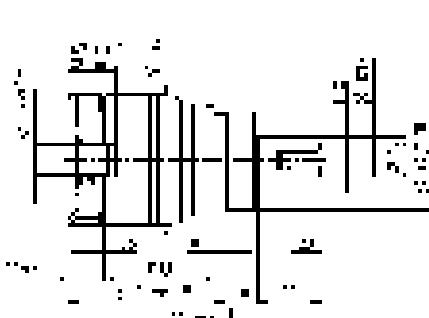


Motor shaft diameter [mm]

Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 005 MF 1-stage

			1-stage					
Ratio	i		4	5	7	8	10	
Max. torque ^{a) b)}	T_{2a}	Nm	18	22	22	21	21	
		in.lb	159	195	195	186	186	
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}	Nm	11	14	14	13	13	
		in.lb	97	124	124	115	115	
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	26	26	26	26	26	
		in.lb	230	230	230	230	230	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{IN}	rpm	3800	4000	4300	4400	4600	
Max. input speed	n_{IMax}	rpm	10000	10000	10000	10000	10000	
Mean no load running torque ^{b)} (at $n_i=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.08	0.07	0.05	0.05	0.05	
		in.lb	0.71	0.62	0.44	0.44	0.44	
Max. backlash	j_t	arcmin			≤ 10			
Torsional rigidity ^{b)}	C_{tz1}	Nm/arcmin	1.2	1.2	1.2	0.85	0.85	
		in.lb/arcmin	11	11	11	7.5	7.5	
Max. axial force ^{c)}	F_{2AMax}	N			600			
		lb _f			135			
Max. tilting moment	M_{2KMax}	Nm			17			
		in.lb			150			
Efficiency at full load	η	%			97			
Service life	L_h	h			> 20000			
Weight (incl. standard adapter plate)	m	kg			0.9			
		lb _m			2			
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)			≤ 58			
Max. permitted housing temperature		°C			+90			
		°F			+194			
Ambient temperature		°C			-15 to +40			
		°F			+5 to +104			
Lubrication					Lubricated for life			
Direction of rotation					In- and output same direction			
Protection class					IP 64			
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z A	8 9	J_1	kgcm ²	0.04	0.03	0.03	0.02
				10 ⁻³ in.lb.s ²	0.04	0.03	0.03	0.02
	B	11	J_1	kgcm ²	0.04	0.03	0.03	0.02
				10 ⁻³ in.lb.s ²	0.04	0.03	0.03	0.02
	C	14	J_1	kgcm ²	0.06	0.05	0.05	0.04
				10 ⁻³ in.lb.s ²	0.05	0.04	0.04	0.04
				kgcm ²	0.14	0.14	0.13	0.13
				10 ⁻³ in.lb.s ²	0.12	0.12	0.12	0.12

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter


^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures





1-stage

Motor shaft diameter [mm]

up to 11⁴⁾ (B)⁵⁾
clamping hub diameter



up to 14⁴⁾ (C)
clamping hub diameter

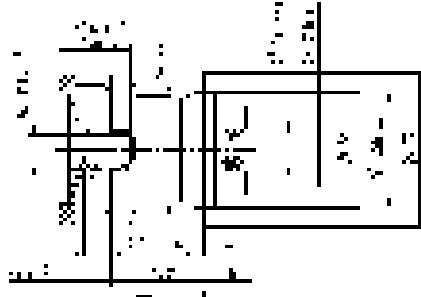

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 005 MF 2-stage

			2-stage													
Ratio	i		16	20	25	28	35	40	50	64	70	100				
Max. torque ^{a) b)}	T_{2a}	Nm	18	18	22	18	22	18	22	21	22	21				
		in.lb	159	159	195	159	195	159	195	186	195	186				
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}	Nm	11	11	14	11	14	11	14	13	14	13				
		in.lb	97	97	124	97	124	97	124	115	124	115				
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	26	26	26	26	26	26	26	26	26	26				
		in.lb	230	230	230	230	230	230	230	230	230	230				
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)			n_{1N}	rpm	4000	4000	4000	4300	4300	4600	4600	4400	4600			
Max. input speed			n_{1Max}	rpm	10000	10000	10000	10000	10000	10000	10000	10000	10000			
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03			
		in.lb	0.35	0.35	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27			
Max. backlash			j_t	arcmin	≤ 13											
Torsional rigidity ^{b)}	C_{tz1}	Nm/arcmin	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.85	1.2	0.85				
		in.lb/arcmin	11	11	11	11	11	11	11	7.5	11	7.5				
Max. axial force ^{c)}	F_{2AMax}	N	600													
		lb _f	135													
Max. tilting moment	M_{2KMax}	Nm	17													
		in.lb	150													
Efficiency at full load			η	%	95											
Service life			L_h	h	> 20000											
Weight (incl. standard adapter plate)	m	kg	1.1													
		lb _m	2.4													
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)			L_{PA}	dB(A)	≤ 58											
Max. permitted housing temperature		°C	+90													
		°F	+194													
Ambient temperature		°C	-15 to +40													
		°F	+5 to +104													
Lubrication			Lubricated for life													
Direction of rotation			In- and output same direction													
Protection class			IP 64													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z	8	J_1	kgcm ²	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.03		
				10 ⁻³ in.lb.s ²	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.03		
	A	9	J_1	kgcm ²	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.03		
				10 ⁻³ in.lb.s ²	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.03		
	B	11	J_1	kgcm ²	0.05	0.05	0.04	0.05	0.04	0.04	0.04	0.04	0.04	0.05		
				10 ⁻³ in.lb.s ²	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04		
	C	14	J_1	kgcm ²	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13		
				10 ⁻³ in.lb.s ²	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12		

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter


^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures





2-stage

Motor shaft diameter [mm]

up to 11⁴⁾ (B)⁵⁾
clamping hub diameter



up to 14⁴⁾ (C)
clamping hub diameter

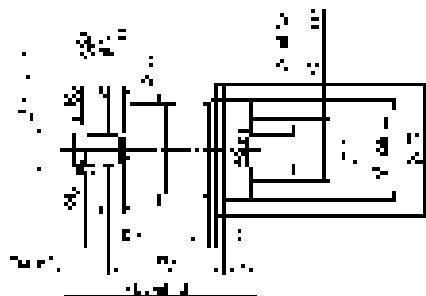

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 015 MF 1-stage

			1-stage						
Ratio	i		3	4	5	7	8	10	
Max. torque ^{a) b)}	T_{2a}	Nm	51	56	60	60	56	56	
		in.lb	451	496	531	531	496	496	
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}	Nm	32	35	40	40	35	35	
		in.lb	283	310	354	354	310	310	
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	75	75	75	75	75	75	
		in.lb	664	664	664	664	664	664	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	3300	3500	3700	4000	4100	4300	
Max. input speed	n_{1Max}	rpm	8000	8000	8000	8000	8000	8000	
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.25	0.2	0.17	0.14	0.13	0.11	
		in.lb	2.2	1.8	1.5	1.2	1.2	0.97	
Max. backlash	j_t	arcmin				≤ 8			
Torsional rigidity ^{b)}	C_{tz1}	Nm/arcmin	3.3	3.3	3.3	3.3	2.8	2.8	
		in.lb/arcmin	29	29	29	29	25	25	
Max. axial force ^{c)}	F_{2AMax}	N			1380				
		lb _f			311				
Max. tilting moment	M_{2KMax}	Nm			42				
		in.lb			372				
Efficiency at full load	η	%			97				
Service life	L_h	h			> 20000				
Weight (incl. standard adapter plate)	m	kg			2				
		lb _m			4.4				
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)			≤ 59				
Max. permitted housing temperature		°C			+90				
		°F			+194				
Ambient temperature		°C			-15 to +40				
		°F			+5 to +104				
Lubrication					Lubricated for life				
Direction of rotation					In- and output same direction				
Protection class					IP 64				
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A 9	J_1	kgcm ²	0.31	0.23	0.19	0.16	0.15	0.14
			10 ⁻³ in.lb.s ²	0.27	0.2	0.17	0.14	0.13	0.12
	B 11	J_1	kgcm ²	0.33	0.24	0.21	0.17	0.17	0.16
			10 ⁻³ in.lb.s ²	0.29	0.21	0.19	0.15	0.15	0.14
	C 14	J_1	kgcm ²	0.41	0.32	0.28	0.25	0.24	0.23
			10 ⁻³ in.lb.s ²	0.36	0.28	0.25	0.22	0.21	0.2
	D 16	J_1	kgcm ²	0.53	0.45	0.41	0.38	0.37	0.36
			10 ⁻³ in.lb.s ²	0.47	0.4	0.36	0.34	0.33	0.32
	E 19	J_1	kgcm ²	0.62	0.53	0.49	0.46	0.45	0.44
			10 ⁻³ in.lb.s ²	0.55	0.47	0.43	0.41	0.4	0.39

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter


^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




1-stage

Motor shaft diameter [mm]

up to 14⁴⁾ (C)⁵⁾
clamping hub diameter



up to 19⁴⁾ (E)
clamping hub diameter

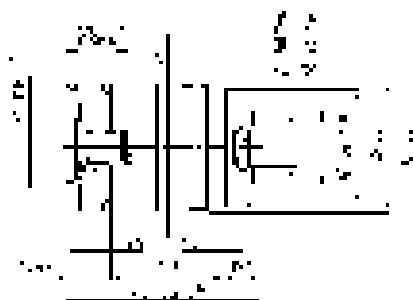

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 015 MF 2-stage

			2-stage																																												
Ratio	i		12	15	16	20	25	28	30	32	35	40	50	64	70	100																															
Max. torque ^{a) b)}	T_{2a}	Nm	51	51	56	56	60	56	51	56	60	56	60	56	60	56																															
		in.lb	451	451	496	496	531	496	451	496	531	496	531	496	531	496																															
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}	Nm	32	32	35	35	40	35	32	35	40	35	40	35	40	35																															
		in.lb	283	283	310	310	354	310	283	310	354	310	354	310	354	310																															
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	75	75	75	75	75	75	75	75	75	75	75	75	75	75																															
		in.lb	664	664	664	664	664	664	664	664	664	664	664	664	664	664																															
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)		n_{1N}	rpm	3800	4000	3800	4000	4000	4300	4600	4400	4300	4600	4600	4400	4600	4600																														
Max. input speed		n_{1Max}	rpm	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000																														
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.08	0.07	0.06	0.06	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.03	0.03	0.03																															
		in.lb	0.71	0.62	0.53	0.53	0.44	0.44	0.44	0.35	0.35	0.35	0.35	0.27	0.27	0.27																															
Max. backlash		j_t	arcmin	≤ 10																																											
Torsional rigidity ^{b)}	C_{tz1}	Nm/arcmin	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	2.8	3.3	2.8																															
		in.lb/arcmin	29	29	29	29	29	29	29	29	29	29	29	25	29	25																															
Max. axial force ^{c)}	F_{2AMax}	N	1380																																												
		lb _f	311																																												
Max. tilting moment	M_{zKMax}	Nm	42																																												
		in.lb	372																																												
Efficiency at full load		η	%	95																																											
Service life		L_h	h	> 20000																																											
Weight (incl. standard adapter plate)	m	kg	2.1																																												
		lb _m	4.6																																												
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 58																																											
Max. permitted housing temperature		°C	+90																																												
		°F	+194																																												
Ambient temperature		°C	-15 to +40																																												
		°F	+5 to +104																																												
Lubrication		Lubricated for life																																													
Direction of rotation		In- and output same direction																																													
Protection class		IP 64																																													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z	8	J_1	kgcm ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02																														
				10 ⁻³ in.lb.s ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02																														
	A	9	J_1	kgcm ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02																														
				10 ⁻³ in.lb.s ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02																														
	B	11	J_1	kgcm ²	0.06	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.04																														
				10 ⁻³ in.lb.s ²	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04																														
	C	14	J_1	kgcm ²	0.15	0.14	0.14	0.14	0.13	0.13	0.14	0.13	0.13	0.13	0.13	0.13	0.13																														
				10 ⁻³ in.lb.s ²	0.13	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12																														

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter


^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures






2-stage

Motor shaft diameter [mm]

up to 11⁴⁾ (B)⁵⁾
clamping hub diameter



up to 14⁴⁾ (C)
clamping hub diameter

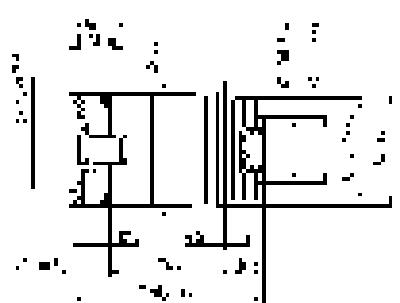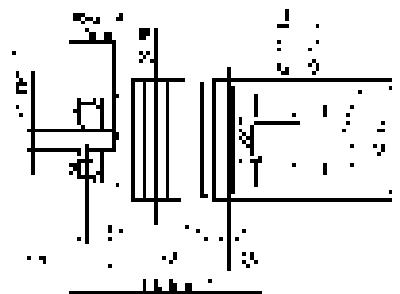

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 025 MF 1-stage

			1-stage							
Ratio	i		3	4	5	7	8	10		
Max. torque ^{a) b)}	T_{2a}	Nm	128	152	160	160	144	144		
		in.lb	1133	1345	1416	1416	1275	1275		
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}	Nm	80	95	100	100	90	90		
		in.lb	708	841	885	885	797	797		
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	190	190	190	190	190	190		
		in.lb	1682	1682	1682	1682	1682	1682		
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	3100	3300	3400	3600	3700	3900		
Max. input speed	n_{1Max}	rpm	7000	7000	7000	7000	7000	7000		
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.43	0.35	0.3	0.24	0.23	0.2		
		in.lb	3.8	3.1	2.7	2.1	2	1.8		
Max. backlash	j_t	arcmin				≤ 8				
Torsional rigidity ^{b)}	C_{tz1}	Nm/arcmin	9.5	9.5	9.5	9.5	8.5	8.5		
		in.lb/arcmin	84	84	84	84	75	75		
Max. axial force ^{c)}	F_{2AMax}	N			1900					
		lb _f			428					
Max. tilting moment	M_{2KMax}	Nm			79					
		in.lb			699					
Efficiency at full load	η	%			97					
Service life	L_h	h			> 20000					
Weight (incl. standard adapter plate)	m	kg			4.4					
		lb _m			9.7					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)			≤ 61					
Max. permitted housing temperature		°C			+90					
		°F			+194					
Ambient temperature		°C			-15 to +40					
		°F			+5 to +104					
Lubrication					Lubricated for life					
Direction of rotation					In- and output same direction					
Protection class					IP 64					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	kgcm ²	0.75	0.57	0.44	0.33	0.3	0.27
				10 ⁻³ in.lb.s ²	0.66	0.5	0.39	0.29	0.27	0.24
	D	16	J_1	kgcm ²	0.9	0.72	0.59	0.46	0.45	0.42
				10 ⁻³ in.lb.s ²	0.8	0.64	0.52	0.41	0.4	0.37
	E	19	J_1	kgcm ²	0.99	0.8	0.67	0.56	0.53	0.5
				10 ⁻³ in.lb.s ²	0.88	0.71	0.59	0.5	0.47	0.44
	G	24	J_1	kgcm ²	2	1.8	1.7	1.6	1.6	1.5
				10 ⁻³ in.lb.s ²	1.8	1.6	1.5	1.4	1.4	1.3
	H	28	J_1	kgcm ²	1.7	1.5	1.4	1.3	1.3	1.2
				10 ⁻³ in.lb.s ²	1.5	1.3	1.2	1.2	1.2	1.1

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter


^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures






1-stage

Motor shaft diameter [mm]

up to 19⁴⁾ (E)⁵⁾
clamping hub diameter



up to 28⁴⁾ (H)
clamping hub diameter

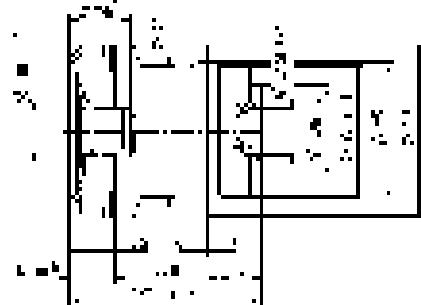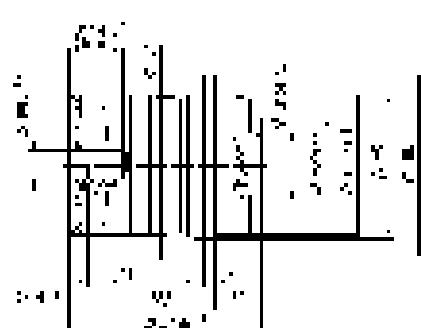

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 025 MF 2-stage

			2-stage																														
Ratio	i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100																
Max. torque ^{a) b)}	T_{2a}	Nm	128	128	128	152	152	160	152	128	152	160	152	160	144	160	144																
		in.lb	1133	1133	1133	1345	1345	1416	1345	1133	1345	1416	1345	1416	1275	1416	1275																
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}	Nm	80	80	80	95	95	100	95	80	95	100	95	100	90	100	90																
		in.lb	708	708	708	841	841	885	841	708	841	885	841	885	797	885	797																
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	190	190	190	190	190	190	190	190	190	190	190	190	190	190	190																
		in.lb	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682																
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)			n_{1N}	rpm	3300	3500	3700	3500	3700	3700	4000	4300	4100	4000	4300	4300	4100	4300															
Max. input speed			n_{1Max}	rpm	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000															
Mean no load running torque ^{b)} (at $n_i=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.16	0.13	0.12	0.11	0.1	0.09	0.09	0.08	0.08	0.08	0.08	0.07	0.07	0.06	0.06																
		in.lb	1.4	1.2	1.1	0.97	0.89	0.8	0.8	0.71	0.71	0.71	0.71	0.62	0.62	0.53	0.53																
Max. backlash			j_t	arcmin	≤ 10																												
Torsional rigidity ^{b)}	C_{tz1}	Nm/arcmin	10	10	10	10	10	9.5	10	10	10	9.5	10	9.5	8.5	9.5	8.5																
		in.lb/arcmin	89	89	89	89	89	84	89	89	89	84	89	84	75	84	75																
Max. axial force ^{c)}	F_{2AMax}	N	1900																														
		lb _f	428																														
Max. tilting moment	M_{zKMax}	Nm	79																														
		in.lb	699																														
Efficiency at full load			η	%	95																												
Service life			L_h	h	> 20000																												
Weight (incl. standard adapter plate)	m	kg	4.7																														
		lb _m	10																														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)			L_{PA}	dB(A)	≤ 59																												
Max. permitted housing temperature		°C	+90																														
		°F	+194																														
Ambient temperature		°C	-15 to +40																														
		°F	+5 to +104																														
Lubrication			Lubricated for life																														
Direction of rotation			In- and output same direction																														
Protection class			IP 64																														
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A	9	J_1	$kgcm^2$	0.28	0.23	0.22	0.22	0.21	0.2	0.2	0.19	0.19	0.19	0.19	0.19	0.19	0.19															
				$10^{-3} in.lb.s^2$	0.25	0.2	0.19	0.19	0.19	0.18	0.18	0.17	0.17	0.17	0.17	0.17	0.17	0.17															
	B	11	J_1	$kgcm^2$	0.3	0.25	0.23	0.24	0.23	0.22	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21															
				$10^{-3} in.lb.s^2$	0.27	0.22	0.2	0.21	0.2	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19															
	C	14	J_1	$kgcm^2$	0.37	0.32	0.31	0.31	0.3	0.29	0.29	0.29	0.29	0.29	0.28	0.28	0.28	0.28															
				$10^{-3} in.lb.s^2$	0.33	0.28	0.27	0.27	0.27	0.26	0.26	0.26	0.26	0.26	0.25	0.25	0.25	0.25															
	D	16	J_1	$kgcm^2$	0.5	0.45	0.44	0.44	0.43	0.42	0.42	0.41	0.41	0.41	0.41	0.41	0.41	0.41															
				$10^{-3} in.lb.s^2$	0.44	0.4	0.39	0.39	0.38	0.37	0.37	0.36	0.36	0.36	0.36	0.36	0.36	0.36															
	E	19	J_1	$kgcm^2$	0.58	0.53	0.52	0.52	0.51	0.51	0.5	0.5	0.5	0.49	0.49	0.49	0.49	0.49															
				$10^{-3} in.lb.s^2$	0.51	0.47	0.46	0.46	0.45	0.45	0.44	0.44	0.44	0.43	0.43	0.43	0.43	0.43															

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter


^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures






2-stage

Motor shaft diameter [mm]

up to 14⁴⁾ (C)⁵⁾
clamping hub diameter



up to 19⁴⁾ (E)
clamping hub diameter

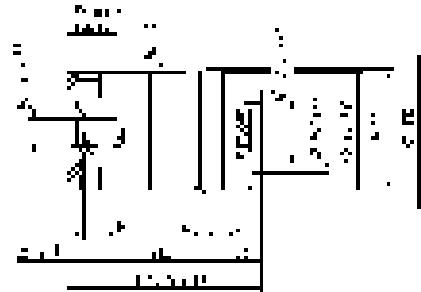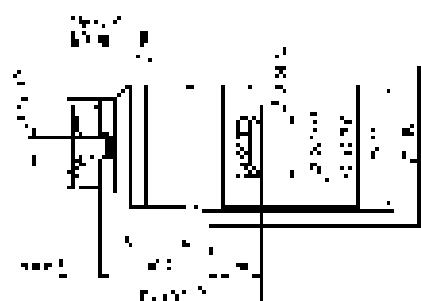

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 035 MF 1-stage

			1-stage						
Ratio	i		3	4	5	7	8	10	
Max. torque ^{a) b)}	T_{2a}	Nm	320	365	365	365	352	352	
		in.lb	2832	3231	3231	3231	3115	3115	
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}	Nm	200	255	250	250	220	220	
		in.lb	1770	2257	2213	2213	1947	1947	
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	480	480	480	480	480	480	
		in.lb	4248	4248	4248	4248	4248	4248	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2300	2500	2600	2800	2900	3000	
Max. input speed	n_{1Max}	rpm	6000	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	1.7	1.3	1.1	0.79	0.71	0.6	
		in.lb	15	12	9.7	7	6.3	5.3	
Max. backlash	j_t	arcmin				≤ 8			
Torsional rigidity ^{b)}	C_{tz1}	Nm/arcmin	25	25	25	25	22	22	
		in.lb/arcmin	221	221	221	221	195	195	
Max. axial force ^{c)}	F_{2AMax}	N			3500				
		lb _f				788			
Max. tilting moment	M_{2KMax}	Nm			134				
		in.lb				1186			
Efficiency at full load	η	%			97				
Service life	L_h	h			20000				
Weight (incl. standard adapter plate)	m	kg			9.4				
		lb _m				21			
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)			65				
Max. permitted housing temperature		°C			90				
		°F				194			
Ambient temperature		°C			15 to +40				
		°F				5 to +104			
Lubrication					Lubricated for life				
Direction of rotation					In- and output same direction				
Protection class					IP 64				
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_1	kgcm ²	3.2	2	1.6	1.2	1	0.93
			10 ⁻³ in.lb.s ²	2.8	1.8	1.4	1.1	0.89	0.82
	G 24	J_1	kgcm ²	4	2.8	2.4	1.9	1.8	1.7
			10 ⁻³ in.lb.s ²	3.5	2.5	2.1	1.7	1.6	1.5
	H 28	J_1	kgcm ²	3.7	2.5	2.1	1.6	1.5	1.4
			10 ⁻³ in.lb.s ²	3.3	2.2	1.9	1.4	1.3	1.2
	I 32	J_1	kgcm ²	7.7	6.6	6.1	5.7	5.6	5.5
			10 ⁻³ in.lb.s ²	6.8	5.8	5.4	5	5	4.9
	K 38	J_1	kgcm ²	8.9	7.8	7.3	6.9	6.7	6.6
			10 ⁻³ in.lb.s ²	7.9	6.9	6.5	6.1	5.9	5.8

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange


^{d)} Please reduce input speed at higher ambient temperatures

1-stage






Motor shaft diameter [mm]

up to 24/28⁴⁾
(G^{5)/H)}

clamping hub diameter



up to 38⁴⁾ (K)
clamping hub diameter

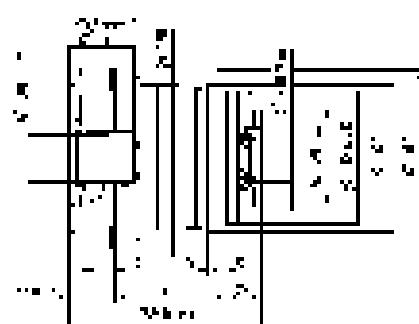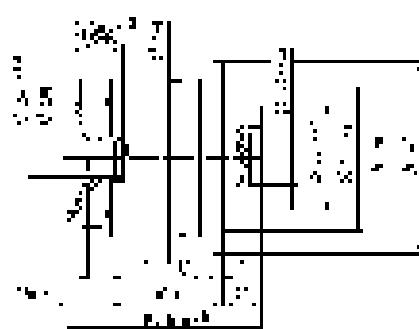

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 035 MF 2-stage

			2-stage																															
Ratio	i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100																	
Max. torque ^{a) b)}	T_{2a}	Nm	320	320	320	365	365	365	365	320	365	365	365	365	352	365	352																	
		in.lb	2832	2832	2832	3231	3231	3231	3231	2832	3231	3231	3231	3231	3115	3231	3115																	
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}	Nm	200	200	200	255	255	250	255	200	255	250	255	250	220	250	220																	
		in.lb	1770	1770	1770	2257	2257	2213	2257	1770	2257	2213	2257	2213	1947	2213	1947																	
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	480	480	480	480	480	480	480	480	480	480	480	480	480	480	480																	
		in.lb	4248	4248	4248	4248	4248	4248	4248	4248	4248	4248	4248	4248	4248	4248	4248																	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)			n_{1N}	rpm	3100	3300	3400	3300	3400	3400	3600	3900	3700	3600	3900	3700	3900	3900																
Max. input speed			n_{1Max}	rpm	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000																
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.6	0.48	0.4	0.38	0.33	0.28	0.26	0.25	0.24	0.23	0.21	0.19	0.17	0.16	0.15																	
		in.lb	5.3	4.2	3.5	3.4	2.9	2.5	2.3	2.2	2.1	2	1.9	1.7	1.5	1.4	1.3																	
Max. backlash			j_t	arcmin	≤ 10																													
Torsional rigidity ^{b)}	C_{tz1}	Nm/arcmin	25	25	25	25	25	25	25	25	25	25	25	25	25	22	25	22																
		in.lb/arcmin	221	221	221	221	221	221	221	221	221	221	221	221	221	195	221	195																
Max. axial force ^{c)}	F_{2AMax}	N	3500																															
		lb _f	788																															
Max. tilting moment	M_{zKMax}	Nm	134																															
		in.lb	1186																															
Efficiency at full load			η	%	95																													
Service life			L_h	h	> 20000																													
Weight (incl. standard adapter plate)	m	kg	9.8																															
		lb _m	22																															
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)			L_{PA}	dB(A)	≤ 61																													
Max. permitted housing temperature		°C	+90																															
		°F	+194																															
Ambient temperature				°C	-15 to +40																													
				°F	+5 to +104																													
Lubrication					Lubricated for life																													
Direction of rotation					In- and output same direction																													
Protection class					IP 64																													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	J_1	$kgcm^2$	0.68	0.63	0.62	0.45	0.44	0.37	0.38	0.52	0.38	0.32	0.37	0.31	0.26	0.27	0.24															
				$10^{-3} in.lb.s^2$	0.6	0.56	0.55	0.4	0.39	0.33	0.34	0.46	0.34	0.28	0.33	0.27	0.23	0.24	0.21															
	D	16	J_1	$kgcm^2$	0.82	0.78	0.77	0.6	0.58	0.51	0.51	0.67	0.53	0.45	0.52	0.46	0.4	0.41	0.39															
				$10^{-3} in.lb.s^2$	0.73	0.69	0.68	0.53	0.51	0.45	0.45	0.59	0.47	0.4	0.46	0.41	0.35	0.36	0.35															
	E	19	J_1	$kgcm^2$	0.91	0.87	0.86	0.69	0.67	0.6	0.61	0.76	0.61	0.55	0.6	0.55	0.49	0.5	0.48															
				$10^{-3} in.lb.s^2$	0.81	0.77	0.76	0.61	0.59	0.53	0.54	0.67	0.54	0.49	0.53	0.49	0.43	0.44	0.42															
	G	24	J_1	$kgcm^2$	1.9	1.9	1.9	1.7	1.7	1.6	1.6	1.8	1.7	1.6	1.6	1.6	1.5	1.5	1.5															
				$10^{-3} in.lb.s^2$	1.7	1.7	1.7	1.5	1.5	1.4	1.4	1.6	1.5	1.4	1.4	1.4	1.3	1.3	1.3															
	H	28	J_1	$kgcm^2$	1.7	1.6	1.6	1.4	1.4	1.3	1.4	1.5	1.4	1.3	1.3	1.3	1.2	1.2	1.2															
				$10^{-3} in.lb.s^2$	1.5	1.4	1.4	1.2	1.2	1.2	1.2	1.3	1.2	1.2	1.2	1.2	1.1	1.1	1.1															

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter


^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures






2-stage

Motor shaft diameter [mm]

up to 19⁴⁾ (E)⁵⁾
clamping hub diameter



up to 28⁴⁾ (H)
clamping hub diameter

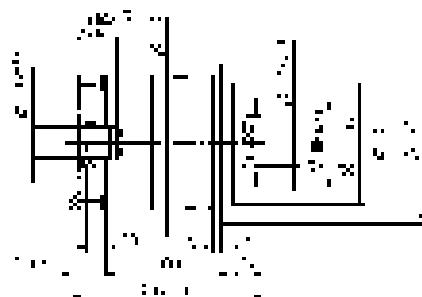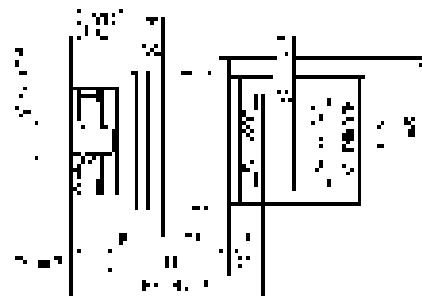

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 045 MF 1-/2-stage

			1-stage				2-stage											
Ratio	i		5	8	10	25	32	50	64	100								
Max. torque ^{a) b)}	T_{2a}	Nm	700	640	640	700	640	700	640	640								
		in.lb	6196	5665	5665	6196	5665	6196	5665	5665								
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}	Nm	500	400	400	500	400	500	400	400								
		in.lb	4425	3540	3540	4425	3540	4425	3540	3540								
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	1000	1000	1000	1000	1000	1000	1000	1000								
		in.lb	8851	8851	8851	8851	8851	8851	8851	8851								
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2000	2200	2300	2600	2500	3000	2900	3000								
Max. input speed	n_{1Max}	rpm	4000	4000	4000	6000	6000	6000	6000	6000								
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	1.5	1.1	0.9	0.39	0.34	0.27	0.24	0.21								
		in.lb	13	9.7	8	3.5	3	2.4	2.1	1.9								
Max. backlash	j_t	arcmin	≤ 8			≤ 10												
Torsional rigidity ^{b)}	C_{tz1}	Nm/arcmin	55	44	44	55	44	55	44	44								
		in.lb/arcmin	487	389	389	487	389	487	389	389								
Max. axial force ^{c)}	F_{2AMax}	N	3800			3800												
		lb _f	855			855												
Max. tilting moment	M_{zKMax}	Nm	256			256												
		in.lb	2266			2266												
Efficiency at full load	η	%	97			95												
Service life	L_h	h	> 20000			> 20000												
Weight (incl. standard adapter plate)	m	kg	19			20												
		lb _m	42			44												
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 68			≤ 65												
Max. permitted housing temperature		°C	+90			+90												
		°F	+194			+194												
Ambient temperature		°C	-15 to +40			-15 to +40												
		°F	+5 to +104			+5 to +104												
Lubrication			Lubricated for life															
Direction of rotation			In- and output same direction															
Protection class			IP 64															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_1	kgcm ²	–	–	–	1.3	1.1	1.1	0.88	0.83							
			10 ⁻³ in.lb.s ²	–	–	–	1.2	0.97	0.97	0.78	0.73							
	G 24	J_1	kgcm ²	–	–	–	2	1.9	1.8	1.7	1.6							
			10 ⁻³ in.lb.s ²	–	–	–	1.8	1.7	1.6	1.5	1.4							
	H 28	J_1	kgcm ²	–	–	–	1.8	1.6	1.6	1.4	1.3							
			10 ⁻³ in.lb.s ²	–	–	–	1.6	1.4	1.4	1.2	1.2							
	I 32	J_1	kgcm ²	–	–	–	5.8	5.7	5.6	5.4	5.4							
			10 ⁻³ in.lb.s ²	–	–	–	5.1	5	5	4.8	4.8							
	K 38	J_1	kgcm ²	9.8	7.8	7.4	7	6.9	6.8	6.6	6.5							
			10 ⁻³ in.lb.s ²	8.7	6.9	6.5	6.2	6.1	6	5.8	5.8							

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only




^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




1-stage

up to 38⁴⁾ (K)⁵⁾
clamping hub diameter


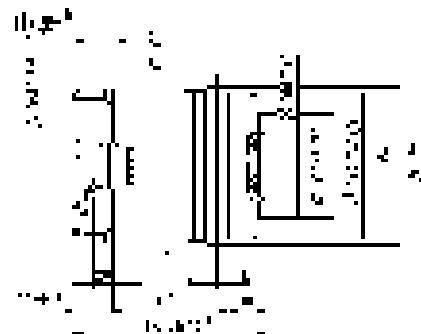



2-stage

up to 28⁴⁾ (H)⁵⁾
clamping hub diameter

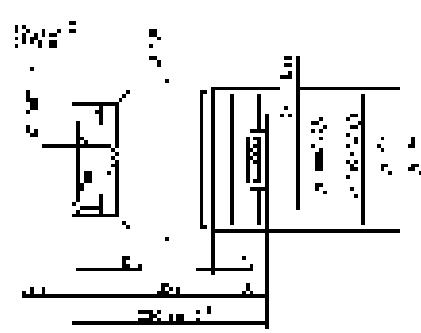

up to 38⁴⁾ (K)
clamping hub diameter

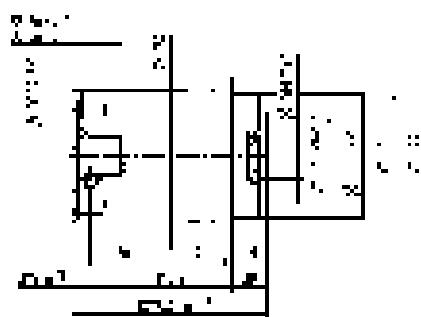

Motor shaft diameter [mm]

Planetary Gearboxes
Value Line

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 015 MA 1-/2-stage

			1-stage		2-stage																				
Ratio	i		3	4	12	15	16	20	28	30	40														
Max. torque ^{a) b)}	T_{2a}	Nm	62	62	62	62	62	62	62	62	62														
		in.lb	549	549	549	549	549	549	549	549	549														
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}	Nm	55	42	39	42	42	42	42	39	42														
		in.lb	487	372	345	372	372	372	372	345	372														
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	75	75	75	75	75	75	75	75	75														
		in.lb	664	664	664	664	664	664	664	664	664														
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)		n_{1N}	rpm	3300	3500	3800	4000	3800	4000	4300	4600														
Max. input speed		n_{1Max}	rpm	8000	8000	10000	10000	10000	10000	10000	10000														
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.25	0.2	0.08	0.07	0.06	0.06	0.05	0.05	0.04														
		in.lb	2.2	1.8	0.71	0.62	0.53	0.53	0.44	0.44	0.35														
Max. backlash		j_t	arcmin	≤ 8		≤ 10																			
Torsional rigidity ^{b)}	C_{tz1}	Nm/arcmin	4	4	4	4	4	4	4	4	4														
		in.lb/arcmin	35	35	35	35	35	35	35	35	35														
Max. axial force ^{c)}	F_{2AMax}	N	1380		1380																				
		lb _f	311		311																				
Max. tilting moment	M_{zKMax}	Nm	42		42																				
		in.lb	372		372																				
Efficiency at full load		η	%	97		95																			
Service life		L_h	h	> 20000		> 20000																			
Weight (incl. standard adapter plate)	m	kg	2		2.1																				
		lb _m	4.4		4.6																				
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 59		≤ 58																			
Max. permitted housing temperature		°C	+90		+90																				
		°F	+194		+194																				
Ambient temperature		°C	-15 to +40		-15 to +40																				
		°F	+5 to +104		+5 to +104																				
Lubrication			Lubricated for life																						
Direction of rotation			In- and output same direction																						
Protection class			IP 64																						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z	8	J_1	kgcm ²	-	-	0.04	0.04	0.03	0.03	0.03														
				10^{-3} in.lb.s ²	-	-	0.04	0.04	0.03	0.03	0.03														
	A	9	J_1	kgcm ²	0.31	0.23	0.04	0.04	0.03	0.03	0.03														
				10^{-3} in.lb.s ²	0.27	0.2	0.04	0.04	0.03	0.03	0.03														
	B	11	J_1	kgcm ²	0.33	0.24	0.06	0.06	0.05	0.05	0.05														
				10^{-3} in.lb.s ²	0.29	0.21	0.05	0.05	0.04	0.04	0.04														
	C	14	J_1	kgcm ²	0.41	0.32	0.15	0.14	0.14	0.13	0.14														
				10^{-3} in.lb.s ²	0.36	0.28	0.13	0.12	0.12	0.12	0.12														
	D	16	J_1	kgcm ²	0.53	0.45	-	-	-	-	-														
				10^{-3} in.lb.s ²	0.47	0.4	-	-	-	-	-														
	E	19	J_1	kgcm ²	0.62	0.53	-	-	-	-	-														
				10^{-3} in.lb.s ²	0.55	0.47	-	-	-	-	-														

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only




^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange




^{d)} Please reduce input speed at higher ambient temperatures

1-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter


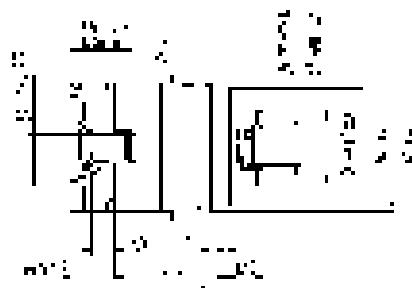



up to 19⁴⁾ (E)
clamping hub
diameter

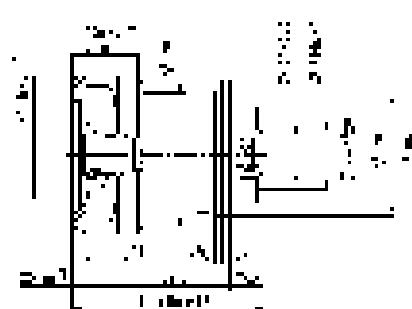



2-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

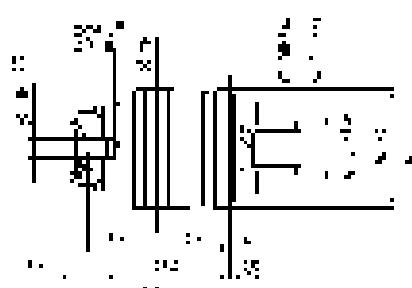

up to 14⁴⁾ (C)
clamping hub
diameter

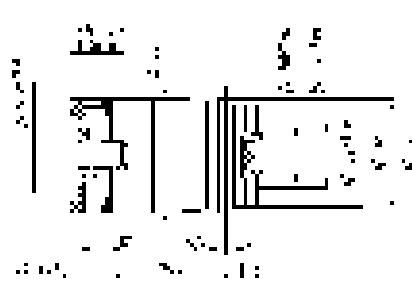

Motor shaft diameter [mm]

Planetary Gearboxes
Value Line

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 025 MA 1-/2-stage

			1-stage		2-stage														
Ratio	i		3	4	9	12	15	16	20	28	30	40							
Max. torque ^{a) b)}	T_{2a}	Nm	185	185	185	185	185	185	185	185	168	185							
		in.lb	1637	1637	1637	1637	1637	1637	1637	1637	1487	1637							
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}	Nm	125	115	125	125	120	115	115	115	105	115							
		in.lb	1106	1018	1106	1106	1062	1018	1018	1018	929	1018							
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	190	190	190	190	190	190	190	190	190	190							
		in.lb	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682							
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)		n_{1N}	rpm	3100	3300	3300	3500	3700	3500	3700	4000	4300							
Max. input speed		n_{1Max}	rpm	7000	7000	8000	8000	8000	8000	8000	8000	8000							
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.43	0.35	0.16	0.13	0.12	0.11	0.1	0.09	0.08	0.08							
		in.lb	3.8	3.1	1.4	1.2	1.1	0.97	0.89	0.8	0.71	0.71							
Max. backlash		j_t	arcmin	≤ 8		≤ 10													
Torsional rigidity ^{b)}	C_{tz1}	Nm/arcmin	12	12	12	12	12	12	12	12	12	12							
		in.lb/arcmin	106	106	106	106	106	106	106	106	106	106							
Max. axial force ^{c)}	F_{2AMax}	N	1900		1900														
		lb _f	428		428														
Max. tilting moment	M_{2KMax}	Nm	79		79														
		in.lb	699		699														
Efficiency at full load		η	%	97		95													
Service life		L_h	h	> 20000		> 20000													
Weight (incl. standard adapter plate)	m	kg	4.4		4.7														
		lb _m	9.7		10														
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 61		≤ 59													
Max. permitted housing temperature		°C	+90		+90														
		°F	+194		+194														
Ambient temperature		°C	-15 to +40		-15 to +40														
		°F	+5 to +104		+5 to +104														
Lubrication				Lubricated for life															
Direction of rotation				In- and output same direction															
Protection class				IP 64															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A	9	J_1	kgcm ²	-	-	0.28	0.23	0.22	0.22	0.21	0.20							
				10^{-3} in.lb.s ²	-	-	0.25	0.2	0.19	0.19	0.19	0.18							
	B	11	J_1	kgcm ²	-	-	0.3	0.25	0.23	0.24	0.23	0.21							
				10^{-3} in.lb.s ²	-	-	0.27	0.22	0.2	0.21	0.2	0.19							
	C	14	J_1	kgcm ²	0.75	0.57	0.37	0.32	0.31	0.31	0.3	0.29							
				10^{-3} in.lb.s ²	0.66	0.5	0.33	0.28	0.27	0.27	0.27	0.26							
	D	16	J_1	kgcm ²	0.9	0.72	0.5	0.45	0.44	0.44	0.43	0.42							
				10^{-3} in.lb.s ²	0.8	0.64	0.44	0.4	0.39	0.39	0.38	0.37							
	E	19	J_1	kgcm ²	0.99	0.8	0.58	0.53	0.52	0.52	0.51	0.5							
				10^{-3} in.lb.s ²	0.88	0.71	0.51	0.47	0.46	0.46	0.45	0.44							
G	24	J_1	kgcm ²	2	1.8	-	-	-	-	-	-	-							
				10^{-3} in.lb.s ²	1.8	1.6	-	-	-	-	-	-							
H	28	J_1	kgcm ²	1.7	1.5	-	-	-	-	-	-	-							
				10^{-3} in.lb.s ²	1.5	1.3	-	-	-	-	-	-							

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only




^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange




^{d)} Please reduce input speed at higher ambient temperatures

1-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter


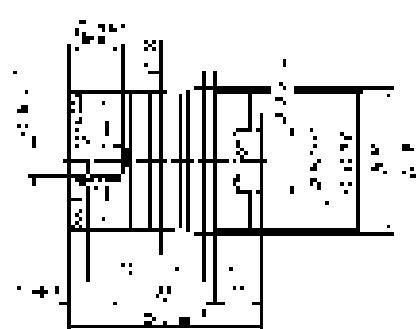



up to 28⁴⁾ (H)
clamping hub
diameter


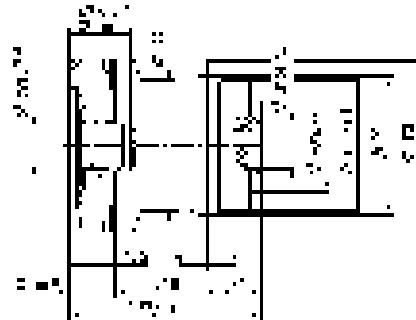



2-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

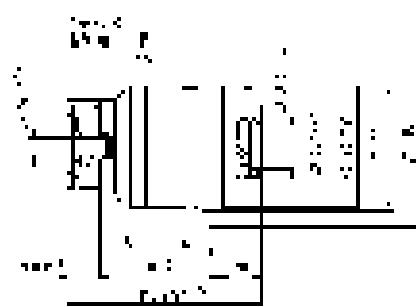

up to 19⁴⁾ (E)
clamping hub
diameter

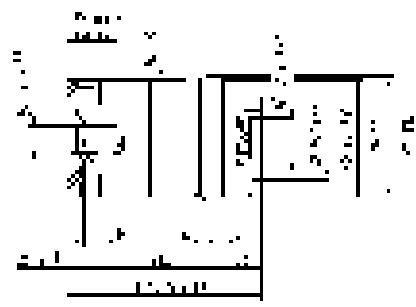

Motor shaft diameter [mm]

Planetary Gearboxes
Value Line

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPT 035 MA 1-/2-stage

			1-stage		2-stage															
Ratio	i		3	4	9	12	15	16	20	28	30	40								
Max. torque ^{a) b)}	T_{2a}	Nm	380	380	380	380	380	380	380	380	370	380								
		in.lb	3363	3363	3363	3363	3363	3363	3363	3363	3275	3363								
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}	Nm	305	305	305	305	300	305	305	305	270	305								
		in.lb	2699	2699	2699	2699	2655	2699	2699	2699	2390	2699								
Emergency stop torque ^{a) b)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	480	480	480	480	480	480	480	480	480	480								
		in.lb	4248	4248	4248	4248	4248	4248	4248	4248	4248	4248								
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)		n_{1N}	rpm	2300	2500	3100	3300	3400	3300	3400	3600	3900								
Max. input speed		n_{1Max}	rpm	6000	6000	7000	7000	7000	7000	7000	7000	7000								
Mean no load running torque ^{b)} (at $n_1=3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	1.7	1.3	0.6	0.48	0.4	0.38	0.33	0.26	0.25	0.21								
		in.lb	15	12	5.3	4.2	3.5	3.4	2.9	2.3	2.2	1.9								
Max. backlash		j_t	arcmin	≤ 8		≤ 10														
Torsional rigidity ^{b)}	C_{tz1}	Nm/arcmin	30	30	30	30	30	30	30	30	30	30								
		in.lb/arcmin	266	266	266	266	266	266	266	266	266	266								
Max. axial force ^{c)}	F_{2AMax}	N	3500		3500															
		lb _f	788		788															
Max. tilting moment	M_{2KMax}	Nm	134		134															
		in.lb	1186		1186															
Efficiency at full load		η	%	97		95														
Service life		L_h	h	> 20000		> 20000														
Weight (incl. standard adapter plate)	m	kg	9.4		9.8															
		lb _m	21		22															
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		L_{PA}	dB(A)	≤ 65		≤ 61														
Max. permitted housing temperature		°C	+90		+90															
		°F	+194		+194															
Ambient temperature		°C	-15 to +40		-15 to +40															
		°F	+5 to +104		+5 to +104															
Lubrication				Lubricated for life																
Direction of rotation				In- and output same direction																
Protection class				IP 64																
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C 14	J_1	kgcm ²	-	-	0.68	0.63	0.62	0.45	0.44	0.38	0.52	0.37							
			10 ³ in.lb.s ²	-	-	0.6	0.56	0.55	0.4	0.39	0.34	0.46	0.33							
	D 16	J_1	kgcm ²	-	-	0.82	0.78	0.77	0.6	0.58	0.51	0.67	0.52							
			10 ³ in.lb.s ²	-	-	0.73	0.69	0.68	0.53	0.51	0.45	0.59	0.46							
	E 19	J_1	kgcm ²	3.2	2	0.91	0.87	0.86	0.69	0.67	0.61	0.76	0.6							
			10 ³ in.lb.s ²	2.8	1.8	0.81	0.77	0.76	0.61	0.59	0.54	0.67	0.53							
	G 24	J_1	kgcm ²	4	2.8	1.9	1.9	1.9	1.7	1.7	1.6	1.8	1.6							
			10 ³ in.lb.s ²	3.5	2.5	1.7	1.7	1.7	1.5	1.5	1.4	1.6	1.4							
	H 28	J_1	kgcm ²	3.7	2.5	1.7	1.6	1.6	1.4	1.4	1.4	1.5	1.3							
			10 ³ in.lb.s ²	3.3	2.2	1.5	1.4	1.4	1.2	1.2	1.2	1.3	1.2							
	I 32	J_1	kgcm ²	7.7	6.6	-	-	-	-	-	-	-								
			10 ³ in.lb.s ²	6.8	5.8	-	-	-	-	-	-	-								
	K 38	J_1	kgcm ²	8.9	7.8	-	-	-	-	-	-	-								
			10 ³ in.lb.s ²	7.9	6.9	-	-	-	-	-	-	-								

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only




^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange




^{d)} Please reduce input speed at higher ambient temperatures

1-stage

up to 24/28⁴⁾
(G<sup>5)/H)
clamping hub
diameter</sup>


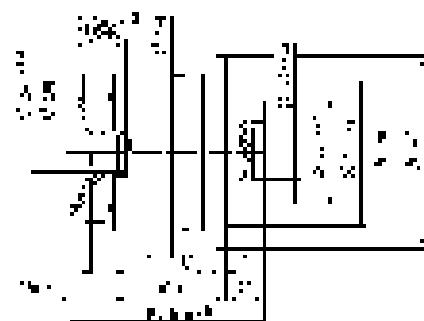



up to 38⁴⁾ (K)
clamping hub
diameter

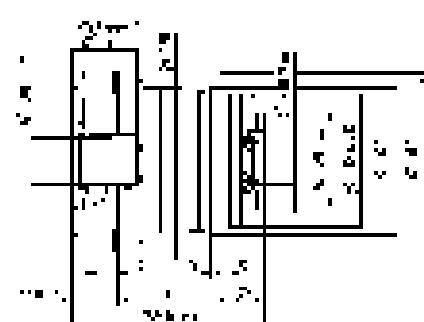



2-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

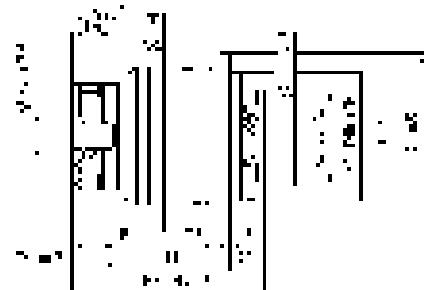

up to 28⁴⁾ (H)
clamping hub
diameter



Motor shaft diameter [mm]

Planetary Gearboxes
Value Line

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated

by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPR 015 MF 1-stage

			1-stage							
Ratio	i		3	4	5	7	8	10		
Max. torque ^{a) b) e)}	T_{2a}	Nm	51	56	64	64	56	56		
		in.lb	451	496	566	566	496	496		
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	32	35	40	40	35	35		
		in.lb	283	310	354	354	310	310		
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	80	80	80	80	80	80		
		in.lb	708	708	708	708	708	708		
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2600	2800	2900	3400	3400	3600		
Max. input speed	n_{1Max}	rpm	8000	8000	8000	8000	8000	8000		
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	0.98	0.78	0.66	0.52	0.48	0.42		
		in.lb	8.7	6.9	5.8	4.6	4.2	3.7		
Max. backlash	j_t	arcmin				≤ 8				
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	3.3	3.3	3.3	3.3	2.8	2.8		
		in.lb/arcmin	29	29	29	29	25	25		
Max. axial force ^{c)}	F_{2AMax}	N			2400					
		lb _f			540					
Max. lateral force ^{c)}	F_{2QMax}	N			2800					
		lb _f			630					
Max. tilting moment	M_{2KMax}	Nm			152					
		in.lb			1345					
Efficiency at full load	η	%			97					
Service life	L_h	h			> 20000					
Weight (incl. standard adapter plate)	m	kg			1.9					
		lb _m			4.2					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)			≤ 59					
Max. permitted housing temperature		°C			+90					
		°F			+194					
Ambient temperature		°C			-15 to +40					
		°F			+5 to +104					
Lubrication					Lubricated for life					
Direction of rotation					In- and output same direction					
Protection class					IP 65					
Elastomer coupling (recommended product type – validate sizing with cymex®)					ELC-0060BA016.000-X					
		mm			X = 012.000 - 032.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A	9	J_1	kgcm ²	0.25	0.19	0.17	0.14	0.14	0.13
				10 ⁻³ in.lb.s ²	0.22	0.17	0.15	0.12	0.12	0.12
	B	11	J_1	kgcm ²	0.26	0.21	0.18	0.16	0.16	0.15
				10 ⁻³ in.lb.s ²	0.23	0.19	0.16	0.14	0.14	0.13
	C	14	J_1	kgcm ²	0.34	0.28	0.26	0.24	0.23	0.23
				10 ⁻³ in.lb.s ²	0.3	0.25	0.23	0.21	0.2	0.2
	D	16	J_1	kgcm ²	0.47	0.41	0.39	0.36	0.36	0.35
				10 ⁻³ in.lb.s ²	0.42	0.36	0.35	0.32	0.32	0.31
	E	19	J_1	kgcm ²	0.55	0.49	0.47	0.45	0.44	0.44
				10 ⁻³ in.lb.s ²	0.49	0.43	0.42	0.4	0.39	0.39

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange




^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft




1-stage

Motor shaft diameter [mm]

up to 14⁴⁾ (C)⁵⁾
clamping hub diameter

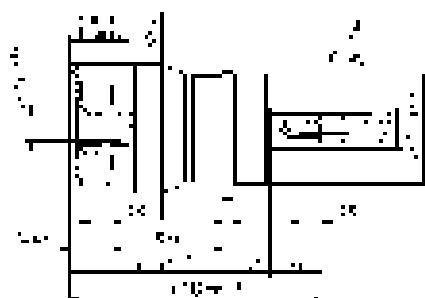


up to 19⁴⁾ (E)
clamping hub diameter

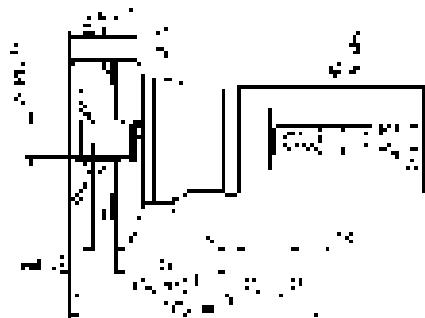

Planetary Gearboxes
Value Line

Other output variants

Shaft with key

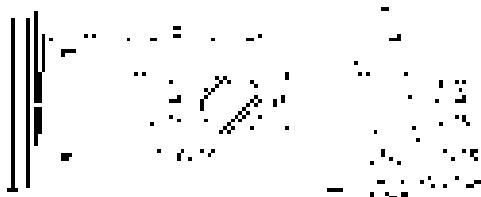

Splined shaft (DIN 5480)

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPR 015 MF 2-stage

			2-stage															
Ratio	i		12	15	16	20	25	28	30	32	35	40	50	64	70	100		
Max. torque ^{a) b) e)}	T_{2a}	Nm	51	51	56	56	64	56	51	56	64	56	64	56	64	56	56	
		in.lb	451	451	496	496	566	496	451	496	566	496	566	496	566	496	496	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	32	32	35	35	40	35	32	35	40	35	40	35	40	35	35	
		in.lb	283	283	310	310	354	310	283	310	354	310	354	310	354	310	354	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	
		in.lb	708	708	708	708	708	708	708	708	708	708	708	708	708	708	708	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)		n_{1N}	rpm	3800	4000	3800	4000	4000	4300	4600	4400	4300	4600	4600	4400	4600	4600	
Max. input speed		n_{1Max}	rpm	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	0.34	0.29	0.29	0.25	0.23	0.21	0.21	0.2	0.2	0.19	0.17	0.17	0.16	0.15	0.15	
		in.lb	3	2.6	2.6	2.2	2	1.9	1.9	1.8	1.8	1.7	1.5	1.5	1.4	1.3	1.3	
Max. backlash	j_t	arcmin	≤ 10															
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	2.8	3.3	2.8	
		in.lb/arcmin	29	29	29	29	29	29	29	29	29	29	29	29	25	29	25	
Max. axial force ^{c)}	F_{2AMax}	N	2400															
		lb _f	540															
Max. lateral force ^{c)}	F_{2QMax}	N	2800															
		lb _f	630															
Max. tilting moment	M_{2KMax}	Nm	152															
		in.lb	1345															
Efficiency at full load	η	%	95															
Service life	L_h	h	> 20000															
Weight (incl. standard adapter plate)	m	kg	2															
		lb _m	4.4															
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 58															
Max. permitted housing temperature		°C	+90															
		°F	+194															
Ambient temperature		°C	-15 to +40															
		°F	+5 to +104															
Lubrication			Lubricated for life															
Direction of rotation			In- and output same direction															
Protection class			IP 65															
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA016.000-X															
		mm	X = 012.000 - 032.000															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z 8	J_t	kgcm ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	
			10 ⁻³ in.lb.s ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	
	A 9	J_t	kgcm ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	
			10 ⁻³ in.lb.s ²	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	
	B 11	J_t	kgcm ²	0.06	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04
			10 ⁻³ in.lb.s ²	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	
	C 14	J_t	kgcm ²	0.14	0.14	0.14	0.13	0.13	0.13	0.14	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13
			10 ⁻³ in.lb.s ²	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange




^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft



2-stage

Motor shaft diameter [mm]

up to 11⁴⁾ (B)⁵⁾
clamping hub diameter

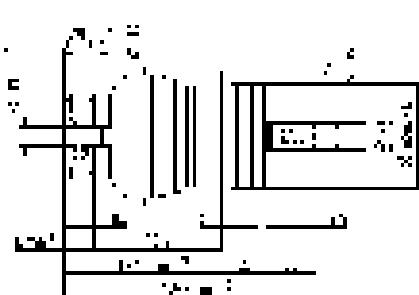

up to 14⁴⁾ (C)
clamping hub diameter




Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)

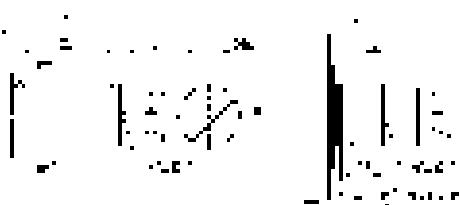

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPR 025 MF 1-stage

			1-stage						
Ratio	i		3	4	5	7	8	10	
Max. torque ^{a) b) e)}	T_{2a}	Nm	128	152	160	160	144	144	
		in.lb	1133	1345	1416	1416	1275	1275	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	80	95	100	100	90	90	
		in.lb	708	841	885	885	797	797	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	190	190	190	190	190	190	
		in.lb	1682	1682	1682	1682	1682	1682	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2400	2600	2700	3000	3100	3300	
Max. input speed	n_{1Max}	rpm	7000	7000	7000	7000	7000	7000	
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	1.9	1.6	1.4	1.1	1.1	0.96	
		in.lb	17	14	12	9.7	9.7	8.5	
Max. backlash	j_t	arcmin				≤ 8			
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	9.5	9.5	9.5	9.5	8.5	8.5	
		in.lb/arcmin	84	84	84	84	75	75	
Max. axial force ^{c)}	F_{2AMax}	N			3350				
		lb _f			754				
Max. lateral force ^{c)}	F_{2QMax}	N			4200				
		lb _f			945				
Max. tilting moment	M_{2KMax}	Nm			236				
		in.lb			2089				
Efficiency at full load	η	%			97				
Service life	L_h	h			> 20000				
Weight (incl. standard adapter plate)	m	kg			3.7				
		lb _m			8.2				
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)			≤ 61				
Max. permitted housing temperature		°C			+90				
		°F			+194				
Ambient temperature		°C			-15 to +40				
		°F			+5 to +104				
Lubrication					Lubricated for life				
Direction of rotation					In- and output same direction				
Protection class					IP 65				
Elastomer coupling (recommended product type – validate sizing with cymex®)					ELC-0060BA022.000-X				
		mm			X = 012.000 - 032.000				
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C 14	J_1	kgcm ²	0.58	0.47	0.38	0.3	0.28	0.26
			10 ⁻³ in.lb.s ²	0.51	0.42	0.34	0.27	0.25	0.23
	D 16	J_1	kgcm ²	0.73	0.62	0.53	0.43	0.42	0.4
			10 ⁻³ in.lb.s ²	0.65	0.55	0.47	0.38	0.37	0.35
	E 19	J_1	kgcm ²	0.81	0.71	0.61	0.53	0.51	0.49
			10 ⁻³ in.lb.s ²	0.72	0.63	0.54	0.47	0.45	0.43
	G 24	J_1	kgcm ²	1.8	1.7	1.6	1.6	1.5	1.5
			10 ⁻³ in.lb.s ²	1.6	1.5	1.4	1.4	1.3	1.3
	H 28	J_1	kgcm ²	1.6	1.4	1.4	1.3	1.3	1.2
			10 ⁻³ in.lb.s ²	1.4	1.2	1.2	1.2	1.2	1.1

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft




1-stage

Motor shaft diameter [mm]

up to 19⁴⁾ (E)⁵⁾
clamping hub diameter





up to 28⁴⁾ (H)
clamping hub diameter

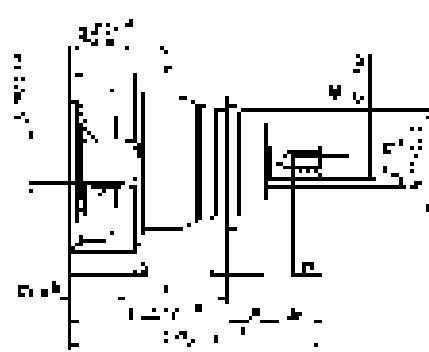

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPR 025 MF 2-stage

			2-stage															
Ratio	i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100	
Max. torque ^{a) b) e)}	T_{2a}	Nm	128	128	128	152	152	160	152	128	144	160	152	160	144	160	144	
		in.lb	1133	1133	1133	1345	1345	1416	1345	1133	1275	1416	1345	1416	1275	1416	1275	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	80	80	80	95	95	100	95	80	90	100	95	100	90	100	90	
		in.lb	708	708	708	841	841	885	841	708	797	885	841	885	797	885	797	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	190	190	190	190	190	190	190	190	190	190	190	190	190	190	190	
		in.lb	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2800	3500	3700	3500	3700	3700	4000	4300	4100	4000	4300	4300	4100	4300	4300	
Max. input speed	n_{1Max}	rpm	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	8000	
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.67	0.55	0.47	0.46	0.4	0.36	0.34	0.33	0.32	0.31	0.29	0.27	0.25	0.25	0.23	
		in.lb	5.9	4.9	4.2	4.1	3.5	3.2	3	2.9	2.8	2.7	2.6	2.4	2.2	2.2	2	
Max. backlash	j_t	arcmin	≤ 10															
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	10	10	10	10	10	9.5	10	10	10	9.5	10	9.5	8.5	9.5	8.5	
		in.lb/arcmin	89	89	89	89	89	84	89	89	89	84	89	84	75	84	75	
Max. axial force ^{c)}	F_{2AMax}	N	3350															
		lb _f	754															
Max. lateral force ^{c)}	F_{2QMax}	N	4200															
		lb _f	945															
Max. tilting moment	M_{2KMax}	Nm	236															
		in.lb	2089															
Efficiency at full load	η	%	95															
Service life	L_h	h	> 20000															
Weight (incl. standard adapter plate)	m	kg	4															
		lb _m	8.8															
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 59															
Max. permitted housing temperature		°C	+90															
		°F	+194															
Ambient temperature		°C	-15 to +40															
		°F	+5 to +104															
Lubrication			Lubricated for life															
Direction of rotation			In- and output same direction															
Protection class			IP 65															
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA022.000-X															
		mm	X = 012.000 - 032.000															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A 9	J_1	kgcm ²	0.26	0.22	0.21	0.21	0.2	0.2	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	
			10 ³ in.lb.s ²	0.23	0.19	0.19	0.19	0.18	0.18	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	
	B 11	J_1	kgcm ²	0.28	0.24	0.23	0.23	0.22	0.22	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21
			10 ³ in.lb.s ²	0.25	0.21	0.2	0.2	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	
	C 14	J_1	kgcm ²	0.35	0.31	0.3	0.3	0.3	0.29	0.29	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28
			10 ³ in.lb.s ²	0.31	0.27	0.27	0.27	0.27	0.26	0.26	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
D 16	J_1	kgcm ²	0.48	0.44	0.43	0.43	0.42	0.42	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41	
		10 ³ in.lb.s ²	0.42	0.39	0.38	0.38	0.37	0.37	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36	
E 19	J_1	kgcm ²	0.56	0.52	0.51	0.52	0.51	0.5	0.5	0.5	0.5	0.5	0.49	0.49	0.49	0.49	0.49	
		10 ³ in.lb.s ²	0.5	0.46	0.45	0.46	0.45	0.44	0.44	0.44	0.44	0.43	0.43	0.43	0.43	0.43		

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange


^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft





2-stage

Motor shaft diameter [mm]

up to 14⁴⁾ (C)⁵⁾
clamping hub diameter



up to 19⁴⁾ (E)
clamping hub diameter

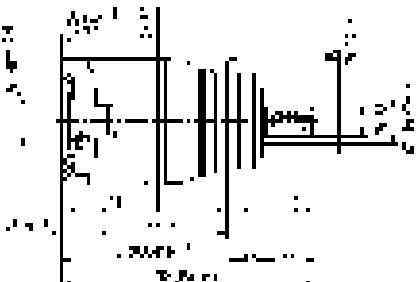



Planetary Gearboxes
Value Line

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPR 035 MF 1-stage

			1-stage						
Ratio	i		3	4	5	7	8	10	
Max. torque ^{a) b) e)}	T_{2a}	Nm	320	408	400	400	352	352	
		in.lb	2832	3611	3540	3540	3115	3115	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	200	255	250	250	220	220	
		in.lb	1770	2257	2213	2213	1947	1947	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	500	500	500	500	500	500	
		in.lb	4425	4425	4425	4425	4425	4425	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	1800	2000	2000	2300	2400	2500	
Max. input speed	n_{1Max}	rpm	6000	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	3.5	2.8	2.4	1.9	1.8	1.6	
		in.lb	31	25	21	17	16	14	
Max. backlash	j_t	arcmin				≤ 8			
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	25	25	25	25	22	22	
		in.lb/arcmin	221	221	221	221	195	195	
Max. axial force ^{c)}	F_{2AMax}	N			5650				
		lb _f			1271				
Max. lateral force ^{c)}	F_{2QMax}	N			6600				
		lb _f			1485				
Max. tilting moment	M_{2KMax}	Nm			487				
		in.lb			4310				
Efficiency at full load	η	%			97				
Service life	L_h	h			> 20000				
Weight (incl. standard adapter plate)	m	kg			8.6				
		lb _m			19				
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)			≤ 65				
Max. permitted housing temperature		°C			+90				
		°F			+194				
Ambient temperature		°C			-15 to +40				
		°F			+5 to +104				
Lubrication					Lubricated for life				
Direction of rotation					In- and output same direction				
Protection class					IP 65				
Elastomer coupling (recommended product type – validate sizing with cymex®)					ELC-0150BA032.000-X				
					X = 019.000 - 036.000				
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_1	kgcm ²	2.5	1.7	1.3	1	0.94	0.87
			10 ³ in.lb.s ²	2.2	1.5	1.2	0.89	0.83	0.77
	G 24	J_1	kgcm ²	3.3	2.4	2.1	1.8	1.7	1.6
			10 ³ in.lb.s ²	2.9	2.1	1.9	1.6	1.5	1.4
	H 28	J_1	kgcm ²	3	2.2	1.8	1.5	1.4	1.4
			10 ³ in.lb.s ²	2.7	1.9	1.6	1.3	1.2	1.2
	I 32	J_1	kgcm ²	7.1	6.2	5.9	5.6	5.5	5.4
			10 ³ in.lb.s ²	6.3	5.5	5.2	5	4.9	4.8
	K 38	J_1	kgcm ²	8.3	7.4	7.1	6.7	6.6	6.6
			10 ³ in.lb.s ²	7.3	6.5	6.3	5.9	5.8	5.8

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage




Motor shaft diameter [mm]

up to 24/28⁴⁾
(G^{5)/H)}

clamping hub diameter

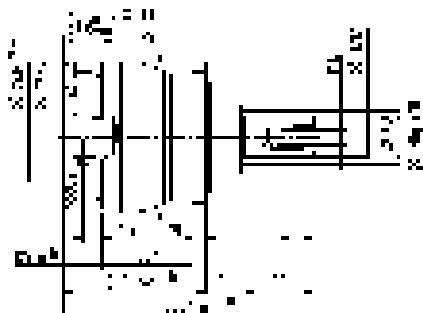


up to 38⁴⁾ (K)
clamping hub diameter

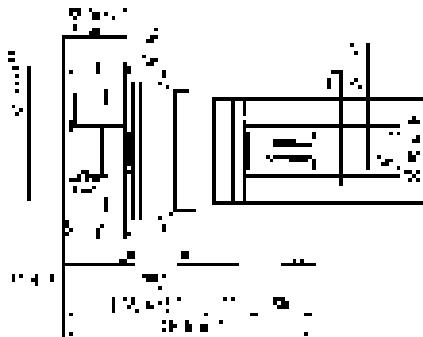


Planetary Gearboxes
Value Line

Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPR 035 MF 2-stage

			2-stage																
Ratio	i		9	12	15	16	20	25	28	30	32	35	40	50	64	70	100		
Max. torque ^{a) b) e)}	T_{2a}	Nm	320	320	320	408	408	400	408	320	408	400	408	400	352	400	352		
		in.lb	2832	2832	2832	3611	3611	3540	3611	2832	3611	3540	3611	3540	3115	3540	3115		
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	200	200	200	255	255	250	255	200	255	250	255	250	220	250	220		
		in.lb	1770	1770	1770	2257	2257	2213	2257	1770	2257	2213	2257	2213	1947	2213	1947		
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500		
		in.lb	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425		
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2600	3300	3400	3300	3400	3400	3600	3900	3700	3600	3900	3900	3700	3900	3900		
Max. input speed	n_{1Max}	rpm	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000	7000		
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	1.7	1.4	1.2	1.2	1.1	1	0.93	0.88	0.88	0.87	0.81	0.77	0.75	0.72	0.68		
		in.lb	15	12	11	11	9.7	8.9	8.2	7.8	7.8	7.7	7.2	6.8	6.6	6.4	6		
Max. backlash	j_t	arcmin	≤ 10																
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	25	25	25	25	25	25	25	25	25	25	25	25	25	22	25	22	
		in.lb/arcmin	221	221	221	221	221	221	221	221	221	221	221	221	221	195	221	195	
Max. axial force ^{c)}	F_{2AMax}	N	5650																
		lb _f	1271																
Max. lateral force ^{c)}	F_{2QMax}	N	6600																
		lb _f	1485																
Max. tilting moment	M_{2KMax}	Nm	487																
		in.lb	4310																
Efficiency at full load	η	%	95																
Service life	L_h	h	> 20000																
Weight (incl. standard adapter plate)	m	kg	9																
		lb _m	20																
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 61																
Max. permitted housing temperature		°C	+90																
		°F	+194																
Ambient temperature		°C	-15 to +40																
		°F	+5 to +104																
Lubrication			Lubricated for life																
Direction of rotation			In- and output same direction																
Protection class			IP 65																
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0150BA032.000-X																
		mm	X = 019.000 - 036.000																
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C 14	J_1	kgcm ²	0.6	0.59	0.6	0.43	0.42	0.36	0.37	0.52	0.38	0.32	0.36	0.31	0.26	0.27	0.24	
			10^3 in.lb.s^2	0.53	0.52	0.53	0.38	0.37	0.32	0.33	0.46	0.34	0.28	0.32	0.27	0.23	0.24	0.21	
	D 16	J_1	kgcm ²	0.75	0.74	0.74	0.58	0.57	0.5	0.5	0.67	0.52	0.45	0.51	0.46	0.4	0.41	0.39	
			10^3 in.lb.s^2	0.66	0.65	0.65	0.51	0.5	0.44	0.44	0.59	0.46	0.4	0.45	0.41	0.35	0.36	0.35	
	E 19	J_1	kgcm ²	0.84	0.83	0.83	0.66	0.65	0.59	0.6	0.75	0.61	0.55	0.6	0.54	0.49	0.5	0.48	
			10^3 in.lb.s^2	0.74	0.73	0.73	0.58	0.58	0.52	0.53	0.66	0.54	0.49	0.53	0.48	0.43	0.44	0.42	
G 24	J_1		kgcm ²	1.9	1.9	1.9	1.7	1.7	1.6	1.6	1.8	1.6	1.6	1.6	1.6	1.5	1.5	1.5	
			10^3 in.lb.s^2	1.7	1.6	1.7	1.5	1.5	1.4	1.5	1.6	1.5	1.4	1.4	1.4	1.3	1.4	1.3	
H 28	J_1		kgcm ²	1.6	1.6	1.6	1.4	1.4	1.3	1.3	1.5	1.4	1.3	1.3	1.3	1.2	1.2	1.2	
			10^3 in.lb.s^2	1.4	1.4	1.4	1.2	1.2	1.2	1.2	1.3	1.2	1.1	1.2	1.1	1.1	1.1	1.1	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange


^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft






2-stage

Motor shaft diameter [mm]

up to 19⁴⁾ (E)⁵⁾
clamping hub diameter




up to 28⁴⁾ (H)
clamping hub diameter

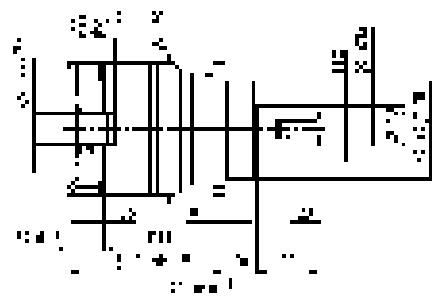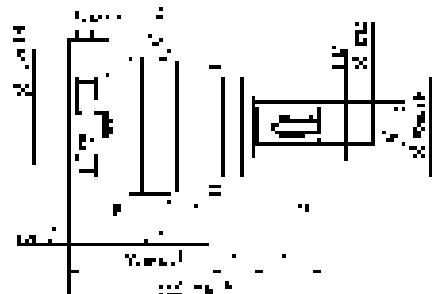


Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPR 045 MF 1-/2-stage

			1-stage				2-stage									
Ratio	i		5	8	10	25	32	50	64	100						
Max. torque ^{a) b) e)}	T_{2a}	Nm	800	640	640	700	640	700	640	640						
		in.lb	7081	5665	5665	6196	5665	6196	5665	5665						
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	500	400	400	500	400	500	400	400						
		in.lb	4425	3540	3540	4425	3540	4425	3540	3540						
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	1000	1000	1000	1000	1000	1000	1000	1000						
		in.lb	8851	8851	8851	8851	8851	8851	8851	8851						
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	1600	1800	1900	2600	2500	3000	2900	3000						
Max. input speed	n_{1Max}	rpm	4000	4000	4000	6000	6000	6000	6000	6000						
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	4.6	3.1	2.6	1.6	1.5	1.2	1.1	0.97						
		in.lb	41	27	23	14	13	11	9.7	8.6						
Max. backlash	j_t	arcmin	≤ 8				≤ 10									
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	55	44	44	55	44	55	44	44						
		in.lb/arcmin	487	389	389	487	389	487	389	389						
Max. axial force ^{c)}	F_{2AMax}	N	9870				9870									
		lb _f	2221				2221									
Max. lateral force ^{c)}	F_{2QMax}	N	9900				9900									
		lb _f	2228				2228									
Max. tilting moment	M_{2KMax}	Nm	952				952									
		in.lb	8426				8426									
Efficiency at full load	η	%	97				95									
Service life	L_h	h	> 20000				> 20000									
Weight (incl. standard adapter plate)	m	kg	19				20									
		lb _m	42				44									
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 68				≤ 65									
Max. permitted housing temperature		°C	+90				+90									
		°F	+194				+194									
Ambient temperature		°C	-15 to +40				-15 to +40									
		°F	+5 to +104				+5 to +104									
Lubrication			Lubricated for life													
Direction of rotation			In- and output same direction													
Protection class			IP 65													
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0300BA040.000-X													
		mm	X = 020.000 - 045.000													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_1	kgcm ²	-	-	-	1.2	1.1	1	0.88	0.82					
			10 ³ in.lb.s ²	-	-	-	1.1	0.97	0.89	0.78	0.73					
	G 24	J_1	kgcm ²	-	-	-	2	1.9	1.8	1.7	1.6					
			10 ³ in.lb.s ²	-	-	-	1.8	1.7	1.6	1.5	1.4					
	H 28	J_1	kgcm ²	-	-	-	1.7	1.6	1.5	1.4	1.3					
			10 ³ in.lb.s ²	-	-	-	1.5	1.4	1.3	1.2	1.2					
	I 32	J_1	kgcm ²	-	-	-	5.8	5.7	5.6	5.4	5.4					
			10 ³ in.lb.s ²	-	-	-	5.1	5	5	4.8	4.8					
	K 38	J_1	kgcm ²	8.7	7.3	7.2	7	6.9	6.8	6.6	6.5					
			10 ³ in.lb.s ²	7.7	6.5	6.4	6.2	6.1	6	5.8	5.8					

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Valid for: Smooth shaft




1-stage

up to 38⁴⁾ (K)⁵⁾
clamping hub diameter





2-stage

up to 28⁴⁾ (H)⁵⁾
clamping hub diameter

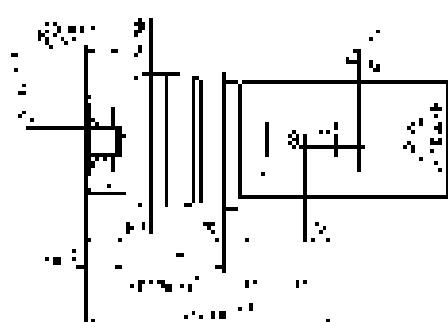


Motor shaft diameter [mm]

up to 38⁴⁾ (K)
clamping hub diameter

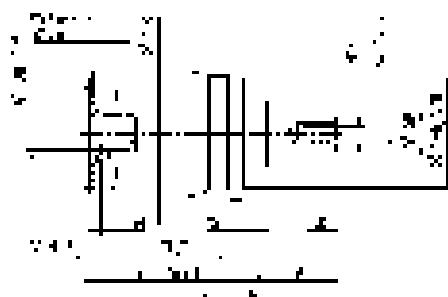


Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPR 015 MA 1-/2-stage

			1-stage		2-stage							
Ratio	i		3	4	12	15	16	20	28	30	40	
Max. torque ^{a) b) e)}	T_{2a}	Nm	80	67	62	67	67	67	67	62	67	
		in.lb	708	593	549	593	593	593	593	549	593	
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	55	42	39	42	42	42	42	39	42	
		in.lb	487	372	345	372	372	372	372	345	372	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	80	80	80	80	80	80	80	80	80	
		in.lb	708	708	708	708	708	708	708	708	708	
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2600	2800	3800	4000	3800	4000	4300	4600	4600	
Max. input speed	n_{1Max}	rpm	8000	8000	10000	10000	10000	10000	10000	10000	10000	
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	0.98	0.78	0.34	0.29	0.29	0.25	0.21	0.21	0.19	
		in.lb	8.7	6.9	3	2.6	2.6	2.2	1.9	1.9	1.7	
Max. backlash	j_i	arcmin	≤ 8		≤ 10							
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	4	4	4	4	4	4	4	4	4	
		in.lb/arcmin	35	35	35	35	35	35	35	35	35	
Max. axial force ^{c)}	F_{2AMax}	N	2400						2400			
		lb _f	540						540			
Max. lateral force ^{c)}	F_{2QMax}	N	2800						2800			
		lb _f	630						630			
Max. tilting moment	M_{2KMax}	Nm	152						152			
		in.lb	1345						1345			
Efficiency at full load	η	%	97						95			
Service life	L_h	h	> 20000						> 20000			
Weight (incl. standard adapter plate)	m	kg	1.9						2			
		lb _m	4.2						4.4			
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 59						≤ 58			
Max. permitted housing temperature		°C	+90						+90			
		°F	+194						+194			
Ambient temperature		°C	-15 to +40						-15 to +40			
		°F	+5 to +104						+5 to +104			
Lubrication			Lubricated for life									
Direction of rotation			In- and output same direction									
Protection class			IP 65									
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0060BA016.000-X									
		mm	X = 012.000 - 032.000									
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	Z	8	J_i	kgcm ²	-	-	0.04	0.04	0.03	0.03	0.03	
				10^{-3} in.lb.s ²	-	-	0.04	0.04	0.03	0.03	0.03	
	A	9	J_i	kgcm ²	0.25	0.19	0.04	0.04	0.03	0.03	0.03	
				10^{-3} in.lb.s ²	0.22	0.17	0.04	0.04	0.03	0.03	0.03	
	B	11	J_i	kgcm ²	0.26	0.21	0.06	0.06	0.05	0.05	0.05	
				10^{-3} in.lb.s ²	0.23	0.19	0.05	0.05	0.04	0.04	0.04	
	C	14	J_i	kgcm ²	0.34	0.28	0.14	0.14	0.13	0.13	0.14	
				10^{-3} in.lb.s ²	0.3	0.25	0.12	0.12	0.12	0.12	0.12	
	D	16	J_i	kgcm ²	0.47	0.41	-	-	-	-	-	
				10^{-3} in.lb.s ²	0.42	0.36	-	-	-	-	-	
	E	19	J_i	kgcm ²	0.55	0.49	-	-	-	-	-	
				10^{-3} in.lb.s ²	0.49	0.43	-	-	-	-	-	

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

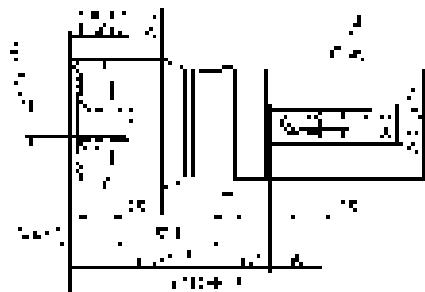



up to 19⁴⁾ (E)
clamping hub
diameter

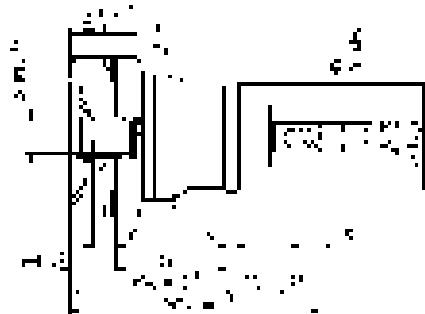



2-stage

up to 11⁴⁾ (B)⁵⁾
clamping hub
diameter

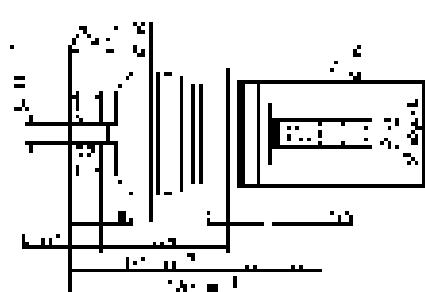

up to 14⁴⁾ (C)
clamping hub
diameter

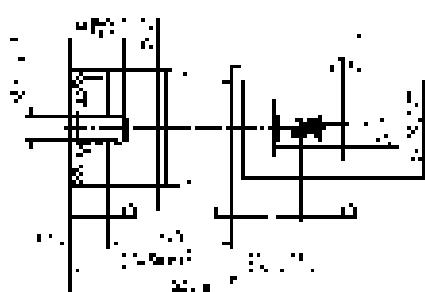


Motor shaft diameter [mm]

Other output variants

Shaft with key

Splined shaft (DIN 5480)

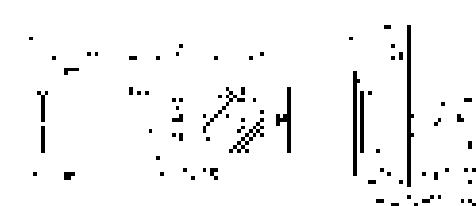

Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPR 025 MA 1-/2-stage

			1-stage		2-stage																							
Ratio	i		3	4	9	12	15	16	20	28	30	40																
Max. torque ^{a) b) e)}	T_{2a}	Nm	185	185	185	185	185	185	185	185	168	185																
		in.lb	1637	1637	1637	1637	1637	1637	1637	1637	1487	1637																
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	125	115	125	125	120	115	115	115	105	115																
		in.lb	1106	1018	1106	1106	1062	1018	1018	1018	929	1018																
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	190	190	190	190	190	190	190	190	190	190																
		in.lb	1682	1682	1682	1682	1682	1682	1682	1682	1682	1682																
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	2400	2600	2800	3500	3700	3500	3700	4000	4300	4300																
Max. input speed	n_{1Max}	rpm	7000	7000	8000	8000	8000	8000	8000	8000	8000	8000																
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	1.8	1.5	0.67	0.55	0.47	0.46	0.4	0.34	0.33	0.29																
		in.lb	16	13	5.9	4.9	4.2	4.1	3.5	3	2.9	2.6																
Max. backlash	j_t	arcmin	≤ 8		≤ 10																							
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	12	12	12	12	12	12	12	12	12	12																
		in.lb/arcmin	106	106	106	106	106	106	106	106	106	106																
Max. axial force ^{c)}	F_{2AMax}	N	3350				3350																					
		lb _f	754				754																					
Max. lateral force ^{c)}	F_{2QMax}	N	4200				4200																					
		lb _f	945				945																					
Max. tilting moment	M_{2KMax}	Nm	236				236																					
		in.lb	2089				2089																					
Efficiency at full load	η	%	97				95																					
Service life	L_h	h	> 20000				> 20000																					
Weight (incl. standard adapter plate)	m	kg	3.7				4																					
		lb _m	8.2				8.8																					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 61				≤ 59																					
Max. permitted housing temperature		°C	+90				+90																					
		°F	+194				+194																					
Ambient temperature		°C	-15 to +40				-15 to +40																					
		°F	+5 to +104				+5 to +104																					
Lubrication			Lubricated for life																									
Direction of rotation			In- and output same direction																									
Protection class			IP 65																									
Elastomer coupling (recommended product type – validate sizing with cymex®)		ELC-0060BA022.000-X																										
		X = 012.000 - 032.000																										
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	A 9	J_1	kgcm ²	-	-	0.26	0.22	0.21	0.21	0.2	0.19	0.19																
			10 ³ in.lb.s ²	-	-	0.23	0.19	0.19	0.19	0.18	0.17	0.17																
	B 11	J_1	kgcm ²	-	-	0.28	0.24	0.23	0.23	0.22	0.21	0.21																
			10 ³ in.lb.s ²	-	-	0.25	0.21	0.2	0.2	0.19	0.19	0.19																
	C 14	J_1	kgcm ²	0.58	0.47	0.35	0.31	0.3	0.3	0.3	0.29	0.28																
			10 ³ in.lb.s ²	0.51	0.42	0.31	0.27	0.27	0.27	0.27	0.26	0.25																
	D 16	J_1	kgcm ²	0.73	0.62	0.48	0.44	0.43	0.43	0.42	0.41	0.41																
			10 ³ in.lb.s ²	0.65	0.55	0.42	0.39	0.38	0.38	0.37	0.36	0.36																
	E 19	J_1	kgcm ²	0.81	0.71	0.56	0.52	0.51	0.52	0.51	0.5	0.5																
			10 ³ in.lb.s ²	0.72	0.63	0.5	0.46	0.45	0.46	0.45	0.44	0.43																
	G 24	J_1	kgcm ²	1.8	1.7	-	-	-	-	-	-	-																
			10 ³ in.lb.s ²	1.6	1.5	-	-	-	-	-	-	-																
	H 28	J_1	kgcm ²	1.6	1.4	-	-	-	-	-	-	-																
			10 ³ in.lb.s ²	1.4	1.2	-	-	-	-	-	-	-																

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures



^{e)} Valid for: Smooth shaft

1-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub diameter

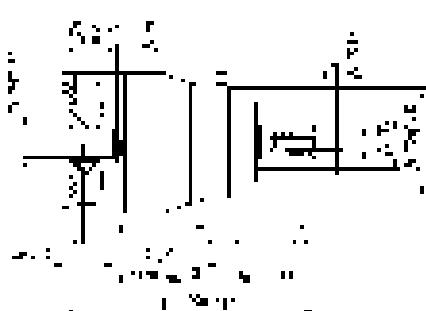



up to 28⁴⁾ (H)
clamping hub diameter






2-stage

up to 14⁴⁾ (C)⁵⁾
clamping hub diameter




up to 19⁴⁾ (E)
clamping hub diameter

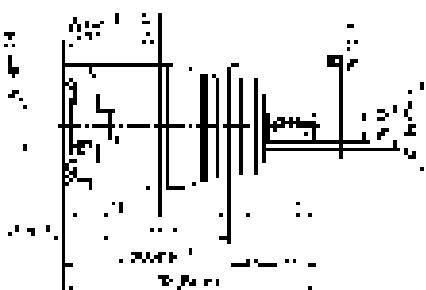


Motor shaft diameter [mm]

Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length
Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated
by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

NPR 035 MA 1-/2-stage

			1-stage		2-stage													
Ratio	i		3	4	9	12	15	16	20	28	30	40						
Max. torque ^{a) b) e)}	T_{2a}	Nm	480	480	480	480	480	480	480	480	432	480						
		in.lb	4248	4248	4248	4248	4248	4248	4248	4248	3824	4248						
Max. acceleration torque ^{e)} (max. 1000 cycles per hour)	T_{2B}	Nm	305	305	305	305	300	305	305	305	270	305						
		in.lb	2699	2699	2699	2699	2655	2699	2699	2699	2390	2699						
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	500	500	500	500	500	500	500	500	500	500						
		in.lb	4425	4425	4425	4425	4425	4425	4425	4425	4425	4425						
Permitted average input speed ^{d)} (at T_{2N} and 20 °C ambient temperature)	n_{1N}	rpm	1800	2000	2600	3300	3400	3300	3400	3600	3900	3900						
Max. input speed	n_{1Max}	rpm	6000	6000	7000	7000	7000	7000	7000	7000	7000	7000						
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{0i2}	Nm	3.5	2.8	1.7	1.4	1.2	1.2	1.1	0.93	0.88	0.81						
		in.lb	31	25	15	12	11	11	9.7	8.2	7.8	7.2						
Max. backlash	j_i	arcmin	≤ 8		≤ 10													
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	30	30	30	30	30	30	30	30	30	30						
		in.lb/arcmin	266	266	266	266	266	266	266	266	266	266						
Max. axial force ^{c)}	F_{2AMax}	N	5650				5650											
		lb _f	1271				1271											
Max. lateral force ^{c)}	F_{2QMax}	N	6600				6600											
		lb _f	1485				1485											
Max. tilting moment	M_{2KMax}	Nm	487				487											
		in.lb	4310				4310											
Efficiency at full load	η	%	97				95											
Service life	L_h	h	> 20000				> 20000											
Weight (incl. standard adapter plate)	m	kg	8.6				9											
		lb _m	19				20											
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)	L_{PA}	dB(A)	≤ 65				≤ 61											
Max. permitted housing temperature		°C	+90				+90											
		°F	+194				+194											
Ambient temperature		°C	-15 to +40				-15 to +40											
		°F	+5 to +104				+5 to +104											
Lubrication			Lubricated for life															
Direction of rotation			In- and output same direction															
Protection class			IP 65															
Elastomer coupling (recommended product type – validate sizing with cymex®)			ELC-0150BA032.000-X															
		mm	X = 019.000 - 036.000															
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C 14	J_1	kgcm ²	-	-	0.6	0.59	0.6	0.43	0.42	0.37	0.52	0.36					
			10 ³ in.lb.s ²	-	-	0.53	0.52	0.53	0.38	0.37	0.33	0.46	0.32					
	D 16	J_1	kgcm ²	-	-	0.75	0.74	0.74	0.58	0.57	0.5	0.67	0.51					
			10 ³ in.lb.s ²	-	-	0.66	0.65	0.65	0.51	0.5	0.44	0.59	0.45					
	E 19	J_1	kgcm ²	2.5	1.7	0.84	0.83	0.83	0.66	0.65	0.6	0.75	0.6					
			10 ³ in.lb.s ²	2.2	1.5	0.74	0.73	0.73	0.58	0.58	0.53	0.66	0.53					
	G 24	J_1	kgcm ²	3.3	2.4	1.9	1.9	1.9	1.7	1.7	1.6	1.8	1.6					
			10 ³ in.lb.s ²	2.9	2.1	1.7	1.6	1.7	1.5	1.5	1.5	1.6	1.4					
	H 28	J_1	kgcm ²	3	2.2	1.6	1.6	1.6	1.4	1.4	1.3	1.5	1.3					
			10 ³ in.lb.s ²	2.7	1.9	1.4	1.4	1.4	1.2	1.2	1.2	1.3	1.2					
	I 32	J_1	kgcm ²	7.1	6.2	-	-	-	-	-	-	-	-					
			10 ³ in.lb.s ²	6.3	5.5	-	-	-	-	-	-	-	-					
	K 38	J_1	kgcm ²	8.3	7.4	-	-	-	-	-	-	-	-					
			10 ³ in.lb.s ²	7.3	6.5	-	-	-	-	-	-	-	-					

Please use our sizing software cymex® for a detailed sizing – www.wittenstein-cymex.com

^{a)} Valid for torque transmission only

^{b)} Valid for standard clamping hub diameter




^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Valid for: Smooth shaft

1-stage

up to 24/28⁴⁾
(G<sup>5)/H)
clamping hub
diameter</sup>


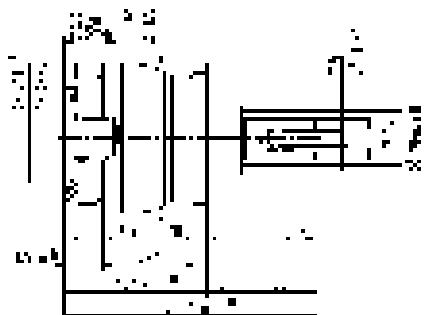



up to 38⁴⁾ (K)
clamping hub
diameter


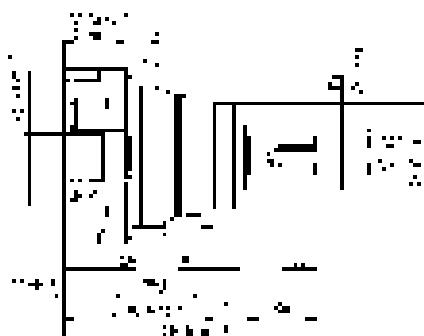



2-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

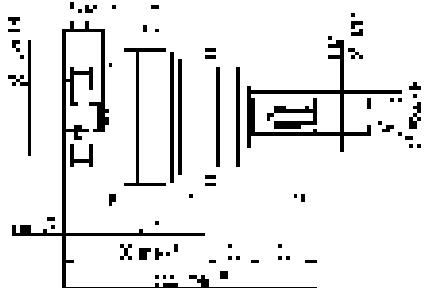


up to 28⁴⁾ (H)
clamping hub
diameter

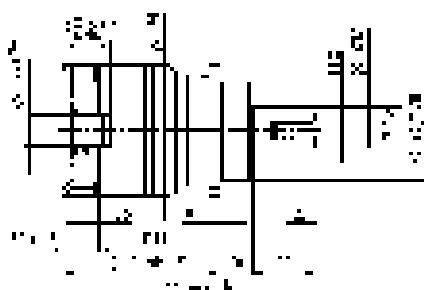


Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min. / Max. permissible motor shaft length

Longer motor shafts are possible, please contact alpha

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter